2010
2011

RACER PARTS WHOLESALE®

Racing Parts & Accessories

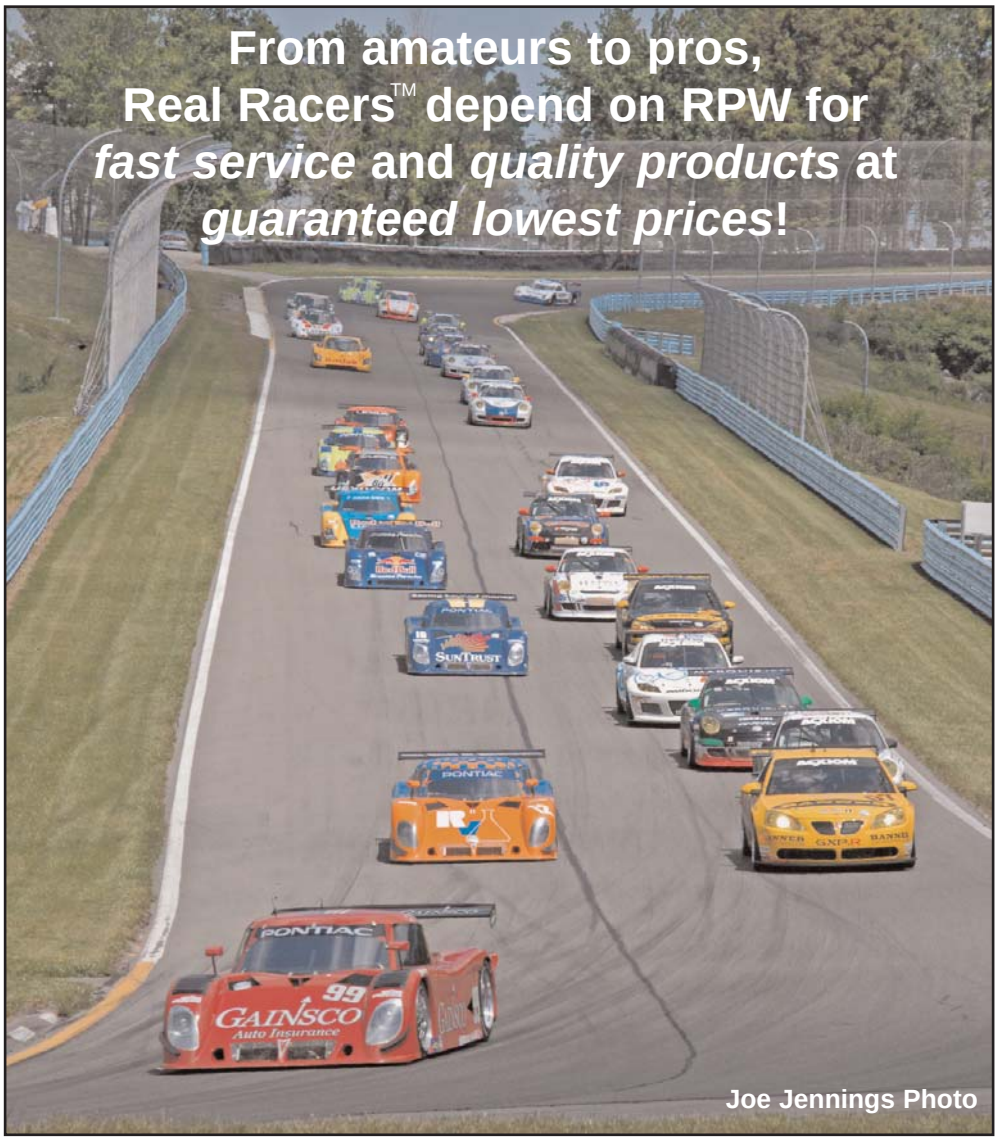

www.racerpartswholesale.com

1-800-397-7815

Table of Contents

Shop www.racerpartswholesale.com

So much shopping is now completed through the Internet that this catalog is a representation of the products that we carry, including our newest and most popular items. For pricing on the products in this catalog, new products, technical information, product manuals, videos and more, please visit us anytime online at www.racerpartswholesale.com

As always, you can also call us at 1-800-397-7815 or e-mail us at info@racerpartswholesale.com so that we may assist in finding you the products that you need.

Thank you for your business!

Love cars, but also ride a motorcycle? Visit RPW's Motorcycle Accessories Division.

Found on the same website as Racer Parts Wholesale, RPW Motorcycle Accessories focuses on providing motorcyclists with the same great quality products, top-notch customer service and low prices that Racer Parts Wholesale customers have come to expect. Online, you will find products including motorcycle luggage, rider safety & comfort, communication, oil and filters, tools, and much more! You can also request a printed catalog or download a PDF of the catalog.



Product Index

Page	Page	Page	Page	Page
Accusump Oil Accumulators 34	Cushion Clamps 24	Instruments 40-41	Oil Filter Cutters 15	Spherical Bearings 24
Aeroquip Hose & Fittings 32-33	Dash Displays....40	Jam Nuts....25	Oil Filters....36	Stack Instruments 3, 40
AN Wrenches 17	Data Acquisition....3-4	Jiffy-tite 31	Oil Scavenge Pumps 35	Steering Wheel Hooks 9
Anti-Slip Material....9	Dial Tread Depth Gauge....14	K & N Products 27	Pit Impact Gun 14	Steering Wheels 19
AutoMeter 41	Differential Cooler Pump....35	Koul Tools 17	Polish 26, 27	Stewart Warner 41
Batteries 22	Digital Video....3-5	Longacre 7-19, 23, 41, 43	Posi-Lock Connectors....23	Stopwatches 8
Battery Chargers....22	Drink Holder 7	Lucas Oil Products 26, 30	Posi-Tap Connectors....23	Tape 9
Battery Connectors 21-22	Ducting 44	Master Cylinders....43	Pyrometers 18	Temp. Indicator Strips 37
Battery Disconnects 23	Durometer 14	Mirrors....19	Quick Disconnects 31	Tents 46
Bolt Kits....24	Dzus Style Fasteners 20	Mocal 31, 34, 35, 37	Race Oil 28, 30	Tie Wraps 9
Brake Bleeders 43	Electric Fans 45	Motive Products 43	Raceceiver 6	Tilton 43
Brake Clean 26	Electrical Components..21-23	MotoCam 5	Race-Keeper....4	Tire Gauges 18
Brake Fluid 27	Engine Leak-Down Tester..15	Motor Oil 28, 30	Radio Systems 6	Tire Treatments....26
Brake Pads 42	Fans 45	Motorcycle Travel 46	Red Line Oil....28-29	Toe-in Plates....13
Brake Temp Paint 43	Fire Bottle Refills....7	NACA Ducts 44	Remote Oil Thermostat....35	Toggle Latches 24
Bump Steer Gauge 12	Firesleeve 32	Neoprene Ducting....44	Ride-Height Gauge 13	Tools 10-18
Camera Mounts 6	Fittings 31-33	Odyssey Batteries....22	Rivet Tools 15, 20	Traqmate....4
Camping Equipment 46	Fluid Transfer Systems....7	Oil 28-30	Rivets 20	Tripac Fans....45
Canton 34-36	Fuel Cells 38	Oil Coolers 37	Robic Stopwatches 8	Turn Plates 11
Caster-Camber Gauges 12	Fuel Pressure Regulator....39	Oil Filter Adapters 35	Rod Ends 25	Utility Jugs....7
ChaseCam 3, 6	Fuel Pumps....39	Spal Electric Fans....45	Roll Bar Padding....8	Video Systems....3-6
ChatterBox 6	Fuel Safe....38		Safety Wire 9, 16	Water Pumps 39
Cleaners 26-27	Fuel Transfer....7		Sandwich Plates 34-35	Waterproof Sacks 46
Communication Systems 6	Gauges 40-41		Scale Accessories....11	Weather Pack Connectors 21
Cots....46	Gear Oil 29, 30		Scales....10	Wire Screen 9
Ctek....22	GoPro 5		Scanners....6	Wireless Scales 10
	Hawk....42		SCCA Decals 7	Wrenches 17
	Heat Exchangers 37		Seat Foam 26	
	Hood Pin Kits 7		SFI Roll Bar Padding 8	
	Hose 32, 45		Shift Lights 41	
			Shock Inflators 15	
			Silicone Ducting 44	

ChaseCam & Stack Video Recorders

ChaseCam Solid State Digital Video Recorder

ChaseCam is continuously updating their digital recorder to reflect the newest technologies and customer needs. For the latest in digital recording from ChaseCam, please visit our ChaseCam category online at www.racerpartswholesale.com

ChaseCam SS1000

Combine the SS1000 with two bullet cameras and your PDR100 (both sold separately) and get real time split screen or picture-in-picture video.

Features:

- Rugged anodized 5” x 3.8” x 1.8” aluminum case w/rubber bumpers
- 12VDC powered
- Rear view video mirroring (user selectable)
- User selectable split screen or picture-in-picture output with automatic video switching to fullscreen if only one primary video signal
- User positionable PIP (left, right, top and bottom)
- Power switch turns on SS1000 and all power to cameras
- Easy to see and reach front panel switches
- RCA and MiniDIN video input and output connections

CHC-SS1000.....**Split Screen/ PIP Video Processor**

Mounting Bracket for SS1000 & PDR100
CHC-MB

ChaseCam DM10 Data Module

Turn your PDR into a Data Acquisition System!

This plug and play solution will turn ANY PDR into a synchronized data and video acquisition system. With ChaseCam’s Data Module your EXISTING PDR can capture GPS data, accelerometer data, vehicle sensors, and even OBD2 data (with optional cable). Everything you need to do in-depth analysis, driver coaching, and extensive gauge overlays is recorded to the same memory card as your video, pre-synchronized and ready for immediate analysis.

A revolutionary tool, the ChaseCam Data Module combines 10Hz GPS tracking, onboard accelerometer, direct vehicle sensor inputs, and OBD2 data and sends it to the PDR where it is recorded along with the ChaseCam video file.

Data Module Specs:
10Hz GPS
3-axis accelerometer (in PDR)
Direct RPM input
Direct throttle position (or other 0-5v) input
OBD2 enabled (with optional cable)

Data Module Kit Includes:
DM10 Data Module
RJ45 connection to PDR
GPS antenna
Mounting hardware
DashWare 1.1 with Analysis

CHC-DM10 .....**Data Module**

Visit the ChaseCam Category online for the latest ChaseCam Products, further information or to download Product Manuals.

Stack Digital Video Recorders

Stack’s DVRs combine ruggedness, reliability and recording quality with a slim, lightweight design that’s perfect for all motorsport competitors and trackday enthusiasts.

PRO-4 DVR and Clubman-3 DVR features:

- Solid-state, no moving parts, ensuring reliable operation year after year
- Records MPEG2 video to removeable CF card
- 3 or 4 fully configurable camera inputs
- Up to 720x480 resolution @ 30 fps
- Widescreen 16:9 and 4:3 aspect ratios
- 2 channel audio recording
- Up to 9 hours of highest quality, full resolution recording
- Automatic record start/stop using built-in 3-axis g-sensor
- 9-20V DC powered, 4 Watts, suitable for all motorsport applications

PRO-4 DVR

Clubman-3 DVR

PRO-4 DVR- Intended for the most demanding motorsport applications, especially in wet, dirty and/or high vibration environments. The PRO-4 DVR is a fully waterproof unit and operates from 32-160°F. The PRO-4 DVR has four camera inputs.

Clubman-3 DVR- Perfect for all forms of club and semi-professional motorsports that do not require a waterproof unit. The Cubman-3 DVR offers high-performance coupled with outstanding reliability yet is an exceptional value for the money. The Clubman DVR features up to 3 camera inputs.

NOTE: This is not a complete system. Cameras, CF cards etc. all sold separately.

Visit www.racerpartswholesale.com for additional information.

Traqmate & Race-Keeper Data Systems

Traqmate Complete System

This complete track-ready setup includes everything you need to get started with Traqmate's powerful GPS based data acquisition system. Traqmate's unique and powerful Traqview software maps the track showing your line through the turns, speed and G-forces as they happen, braking points, acceleration points and detailed printable graphs of every data input. You can configure drivers, vehicles and tracks, quickly upload sessions and get immediate results. The Traqmate complete includes an ergonomically designed display unit that will show your laptimes in your car including lap comparison and best lap icons. Use Traqmate's unique modes such as Lapping, Drag Racing, Autocross, Braking, G-force, and GPS Compass to have fun, tune your car, or even find your way to the track! The Traqmate display unit doubles as a USB storage device so you can replay your day quickly and easily.

Includes:
- Traqmate GPS Sensor Unit
- Traqmate Display Unit w/ backlight
- Traqview Analysis Software for Windows™
- Magnetic mount GPS antenna
- Velcro mounting
- USB cable
- 12ft (standard) or 6ft DIN extension Cable (request at time of order)
- Cigarette lighter power cord or Vehicle Power Harness (request at time of order)

930001 .....Traqmate Complete System

Race-Keeper SE Video Data Logger System

Race-Keeper combines the power of professional-grade video and data systems in one easy-to-use video data package. Coupled with Race-Keeper Comparo side-by-side analysis software, Race-Keeper is a very powerful, competitively priced driver development tool available to help racers analyze and improve their driving.

Features:
- Delivers automatically, instantly synchronized video and data for use with Race-Keeper Comparo driver development software.
- Stunningly high-resolution video delivered by two full-stream MPEG encoders supporting up to four cameras.
- Crystal clear audio delivered via a durable microphone programmed with automatic gain control.
- Capture track sessions to removable SD card or USB stick.
- Control buttons with heavy click & button feedback or simply configure the box to be completely auto-power on & auto-start & auto-stop.
- Locking connectors ensure secure and tight connections under high-vibration environments.
- Data inputs include OBD-II/CAN and up to 8 analog sensors.

System Includes:
- Video data logger box- lightweight- only 1 lb!
- 2GB SD card
- 1GB USB stick
- 1 Standard 380 line camera
- Connect up to 4 cameras (additional cameras sold separately)
- Microphone
- GPS Antenna
- Power loom (cig lighter or 12v connect)
- Installation kit
- Race-Keeper Comparo PC software
- Race-Keeper Quick start guides

RK-C3

RK-KIT1 .....**Race-Keeper Video Data Logger System w/1 Standard Camera**
RK-OBD .....**Race-Keeper OBDII Interface**
RK-C3 .....**Race-Keeper Hi-Res Mini-Square Camera**

Additional cameras and accessories available. Please visit the Race-Keeper category on www.racerpartswholesale.com or call 1-800-397-7815 for more information.

GoPro & MotoCam Video Systems

GoPro's Motorsports HERO Video Systems

The world's smallest, wireless on-board video camera. The Motorsports HERO quick-release attaches to helmets, cars, motorcycles, boats, planes, etc. Sets up in seconds and is easily moved between different mount locations. Shoot 56 minutes of high-resolution video and 5 megapixel photos automatically in "Photo every 2 seconds" mode. Use as a hand held camera, too. Shockproof and waterproof to 100 feet/30 meters.

Available in standard or 170 degree wide lens. Wide Lens also available with helmet mount or suction cup mount. For motorsports filming where wide angle immersion is the goal, the wide angle lens Motorsports HERO Wide camera is recommended.

What's Included:
- 1 Shockproof/Waterproof Quick-Release Housing
- Flat, 3M™ Adhesive Mounts
- Curved, 3M™ Adhesive Mounts
- Horizontal Surface, Quick-Release Buckles
- 1 Suction Cup Mount or headlamp style head strap
- 1 Three-Way Pivoting Side Arm Assembly
- 1 USB/RCA Combo Cable
- Warranty: One Year

NOTE: SD card not included

GOP-GMHW50 .....**Standard Lens System plus Suction Cup Mount**
GOP-GMHW5170 .....**170 Degree Wide Lens System plus Suction Cup Mount (pictured above)**
GOP-GHHW5170 .....**170 Degree Wide Lens System plus Headlamp Style Head Strap**
GOP-GRBM30.....**Roll Bar Mount Only- 1.4 in - 2.5 in Diameter**

GoPro's Motorsports HERO Video Systems- High Definition

This version has the same great features of the standard GoPro Video Systems, but it records in high definition. GoPro's HD Motorsports HERO is the world's highest performance 1080p HD on-board video and still photo camera. Professional quality 1080p, 960p, and 720p HD resolutions record at 30 frames per second (60 fps in 720p).
GOP-CHDMH-001 .....**170 Degree Wide Lens, Hi-Def System**

Visit www.racerpartswholesale.com for complete system specifications.

MotoCam Shockbox Hard Mount Camera System

MotoCam's camera systems work in almost any situation- from race cars and street cars to dirt bikes and ATVs! The systems are designed to operate reliably in even the harshest conditions. MotoCam's newest Shockbox digital recording camera systems comes complete with an 8GB mini SD, 550 scanline Sony color CCD bullet camera and also features One-Touch wired remote control for effortless start/stop operation. **MTC-MC360-SBHD-P**

System package includes:
- Shockbox Rechargeable Shell (Li-Poly, waterproof to 10 feet deep)
- Shell has 8 hours of rechargeable power built in
- Mic with adjustable gain control to minimize wind noise
- 550 scanline Sony 1/3" CCD color bullet camera
- Camera RAM Ball Mount
- DVR - 720x480x30fps
- Wired Remote Control
- 8Gb mini SD memory card
- Li Poly Battery Recharger
- Video Editing Software
- TV/PC cables
- Rollbar mount included (up to 2.5")

Additional MotoCam Systems and information available in the MotoCam Category online.

Need help selecting your next video system? Let us help you- call us at 1-800-397-7815 or e-mail us at info@racerpartswholesale.com. From online quality to broadcast quality, we have a system for your needs and your budget!

Video Components & Communication

Recording Device Mounts

for use mounting your handheld recording device directly onto your vehicle

VS Billet Camera Mount

This camera mount installs on roll cage tube sizes between 1-1/4" and 2". Kit includes mount, mounting screws and safety strap. **SPI-CCM**

Triple Cup Window Mount

This unit is designed to hold small, lightweight cameras and camcorders. **SPI-SM31**

Ultra Window Mount

This unit is designed to hold small, lightweight cameras and camcorders. **SPI-SM40**

Bullet Camera Mounts

for use with ChaseCam or similar bullet cameras

Bar Mounts

1-1/4", 1-3/8", 1-1/2" and 1-3/4" bar mounts available. Please specify size needed. **SPI-CM60**

Bar Mount Plus

This unit has a 21 mm collar for the bullet camera, which provides a stronger, more stable mount for the bullet camera. 1 1/4", 1 3/8", 1 1/2" and 1 3/4" bar mounts available. Please specify size needed. **SPI-CM60PLUS**

ChaseCam Bullet Camera Mounts

CHC-CC05

CHC-CC10

Clamp Mount

The clamp mount is designed to enable you to clamp onto any item up to 1-1/2" thick. **SPI-CM50**

Triple Suction Cup Mount

This unit is designed to hold small lightweight cameras and camcorders. **SPI-SM30**

Single Suction Cup Mount

For use with small, lightweight bullet cameras only. **SPI-SM10**

Universal Helmet Mount

This flexible rubber sleeve keeps your camera tight while the hook and loop backing secures the mount to the helmet surface. **SPI-UBM**

Visit us online or call for information on our Complete Radio Systems and our Radio System Components.

Chatterbox XBi Wireless Intercom with Bluetooth Kit

The Chatterbox XBi intercom system allows driver to passenger via CDMA crystal clear technology, using either voice activation or push-to-talk. Both driver and passenger module is capable of pairing with up to two accessory devices at the same time. (ex. iPod, Mp3, satellite radio, GPS, cell phone, radar detector). SMART technology will automatically prioritize the transmission of the paired devices. The XBi is so far advanced that it can even stream music from one module to the other. Other features include: Li-Pol (lithium polymer) rechargeable battery with 6-8 TRUE hours of power, 1 hour express charge, noise suppression Hi-Fi headset, compact aerodynamic module design. Each kit includes: module, Li-Pol battery, wall charger, headset and mounting hardware.

Note: Two kits are needed for driver to passenger set-up.

CBR-CBXBIFKIT .....**Full Face Kit** (pictured)
CBR-CBXBIOKIT .....**Open Face Kit**

CB 50 Tandem Pro Instructor to Student Communication System

Pictured: CB-50 and CBR-SRHS

The CB-50 Tandem Pro is Chatterbox's best selling intercom with such features as true stereo sound, an audio input to listen to your favorite songs, and a cellular phone input to keep in touch with friends. The CB-50 Kit includes the main unit, rechargeable Ni-MH battery, AC home charger, a stereo headset extension cord, and all the necessary brackets and mounting hardware. Headset(s) sold separately.

CBR-HJC-50 .....**CB-50 Chatterbox Tandem**
CBR-SRHS .....**Student Racing Headset**
CBR-CB50FFHS.....**Full Face Headset**
CBR-CB50OFHS .....**Open Face Headset**

Raceceiver Elite

With 1,600 pre-programmed frequencies, simply program your desired frequencies into this pager sized scanner and hear the inside scoop! With the Raceceiver you can manually scan all drivers and officials one channel or 100 channels at a time. **ISP-TSE1600**

Truscan Raceceiver

All the features of the Raceceiver, but with 11 channel auto scanning with 1 priority! Also, the Raceceiver Truscan can store up to 12 frequencies by car number. **ISP-TS1600**

Utility Jugs, Decals & Fire Bottle Refills

FLO-FAST Portable Fluid Transfer Systems

PDG-20210 shown

This is the easiest and fastest way to fuel your car! No Mess! FLO-FAST will transfer 5 gallons of fluid in less than 1 minute! The 15 gallon system will pump 15 gallons into a container or draw 15 gallons out of a container in 2 and 1/2 minutes.

15 gallon Utility Jugs

PDG-15501 .....Red
PDG-15502 .....Blue
PDG-15503 .....Clear

Complete Systems- includes cart, strap, pump and fuel jugs.

PDG-20210 ..10 gallon system- includes two 5 gal jugs
PDG-20215 ..15 gallon system- includes one 15 gal jug
PDG-20216 ..15 gallon system- includes two 7.5 gal jugs

FLO-FAST Pump System

PDG-30301 .....5 and 7.5 gallon system
PDG-30302 .....15 gallon system
PDG-30303 .....pump only (7 ft. of hose and tether strap)

Fold up cart and strap- two 5 gallon jugs or one 15 gallon jug (jugs not included)

PDG-60602 .....steel

Hose and Drum Extension Kits

PDG-40401 .....replacement hose kit (7 ft.)
PDG-40402 .....hose extension kit (5 ft.)
PDG-40405 .....drum extractor extension kit

Utility Jugs

These high-strength polyethylene jugs have two handles to make pouring much easier and safer! Unique molded corner ensures that all liquid will empty from the jug.

Features:

- Large mouth and unbreakable screw-on cap
- Stackable
- 10 in. by 10 in. by 21 in.
- DOT accepted
- O-ring seal in cap prevents leaks.
- Cap comes with 3/4" pipe plug.

RR7-221 .....Fuel Jug
RR5-225 .....24" filler hose
RR5-221 .....replacement cap with/O-ring seal

Funnel

Cut your refueling time with our anti-vortex funnel. The advanced design provides you with an extended top lip to prevent splashing. It's made of high-impact-resistant polypropylene and is totally washable with soap or solvent. 14"-diameter, D-style. We also use these funnels to drain transmissions, engines and rear-end assemblies.

RR6-110 .....funnel

Drink Holder

- Large-capacity, double-insulated bottle w/ tube.
- Includes "bite valve" to avoid leaks from tube.
- Bolts onto your roll bar; no welding is required.
- Lightweight anodized aluminum.

LAR-22551 .....Drink Holder for 1-3/4-in. bar
LAR-22553 .....Drink Holder for 1-1/2-in. bar
LAR-22556 .....Replacement Drink Bottle and Hose

SCCA Decals

RPW-2600 .....SCCA Pro Racing
RPW-2602 .....SCCA wire wheel, 4-1/2" diameter
RPW-2603 .....SCCA wire wheel, 2-1/2" diameter
RPW-2606 .....Master Switch
RPW-2607 .....Fire extinguisher
RPW-2608 .....SCCA Club Racing
RPW-2609 .....SCCA Solo 1
RPW-2610 .....SCCA Road Rally
RPW-3637 .....SCCA Club Racing Patch

Lightweight Aluminum Hood Pin Kit

Includes two pins, four jam nuts, two scuff plates and two flip-style safety pins.

LAR-23500.....1/2"-20, set of 2
LAR-23502.....1/2"-20, set of 6
LAR-23510.....3/8"-24, set of 2

Torsion Clip Hood Pin Replacements

LAR-23550 .....pack of two
RPW-7160.....7/16-in.-dimeter pins

Racer Parts Wholesale Gift Certificates

What to get the guy who has everything

Call or visit online to order a $25, $50 or $100 gift certificate. We will include a copy of our catalog to make it easy to choose from our thousands of products that are stocked in our warehouse in Indianapolis.

Need to have your SPA Technique Fire Bottle refilled? We are an authorized SPA Technique Fire Bottle Service Station. Most fire bottles have a 1-2 day turnaround. To schedule your refill, please call 1-800-397-7815.

Roll Bar Padding & Stopwatches

High-Density MINI Roll Bar Padding

Features:
- Fits bars for 1-1/2-in. to 1-3/4-in.
- Each 3-ft. piece is self-adhesive (pre-taped) for quick and clean installation
- Streamlined shape focuses the padding where you need it, improving sightlines and reducing blind spots due to narrower design.
- Lightweight and sporty!

LAR-65182 .....**Black Mini Padding**
LAR-65184.....**Red Mini Padding**
LAR-65183 .....**Blue Mini Padding**

High-Density Roll Bar Padding

Features:
- Pre-taped adhesive.
- Won't drip or melt in a fire.
- Provides maximum in energy absorption & flame retardation
- Fits bars for 1-1/2-in. to 1-3/4-in.
- 36-inches long

LAR-65162.....**Black Hi-Density Padding**
LAR-65166 .....**Red Hi-Density Padding**
LAR-65164.....**Blue Hi-Density Padding**

"SFI" Approved Padding

- Required in NHRA, SCCA, recommended in NASCAR.
- **Meets SFI spec 45.1**
- Provides maximum in energy absorption and flame retardation, will not drip or melt in a fire.
- Fits bars for 1-1/2" to 1-3/4", 36" length, pre-taped adhesive.

LAR-65169 .....**Black SFI Padding**

RPW Roll Bar Padding

Gives you the cushion you hope you never need! Available in black, blue, red, orange, yellow and gray.
- Flame-retardent base
- 1-inch thick padding, 36-in. long
- Offset hole so you can put the pad where needed
- 1-5/8-inch ID (1-3/8-in. to 1-3/4 in. bars)

RPW-RBPAD

Ugli Gripz for Steering Wheels

You have a fitted helmet, shoes, racing suit and gloves- why not a fitted steering wheel or handlebar? Ugli Gripz are custom moldable grips that form to your hand and allow you to control any instrument. Ugli Gripz help each individual finger share a portion of the load as opposed to relying on hand-grip strength alone. They also allow for a hand position that can be repeated exactly, every time, which increases precision and will improve your game. The cushioning is firm, yet absorbs vibration and shock that regular grips cannot. Available in three options: Motorcycle Grip Kit, Formula/ Sportsracer/ Kart Kit or GT/ Cup/ Sedan Kit. **UGR**

Longacre Memory Stopwatch

Features:
- Lap counter
- 30 lap memory
- Crisp one-button action
- Comes with silver case

LAR-22163

Robic SC 507 Stopwatch

Features:
- Electroluminescent (EL) backlight illuminates entire display, on demand.
- Lap, split or single-event timing.
- 1/1000-second precision to 24 hours.
- Reads to .0001-second.
- Shows current running lap or split times.
- Extra large display with large numbers.

RPW-SC507

Robic SC 554 Stopwatch

Features:
- Perfect blend of speed & chronograph functions.
- Speed Timer displays lap speed in mph & kph.
- 30-lap memory of speed, lap time and number.
- Automatic lap counter to 999.
- Distance entry precise to 1/1,000 mi/km.
- Fastest and average lap times on demand.
- Displays lap, split or dual split timing modes.

RPW-SC554

Robic SC 808 Stopwatch

Features:
- 200-lap memory.
- Backlite display.
- Calculates average mph.
- Automatic lap counter to 999.
- Displays total run time.
- Three-line display.

RPW-SC808

Robic SC 888 150-Lap Triple-Timer

Features:
- Time 3 cars simultaneously.
- Times can be started together or separately.
- Lap, split and cumulative running times.
- 150-lap split memory.
- Auto lap counter to 999.
- Average lap time, average/fastest speed.
- Three auto repeat count-down timers, time of day, alarm and calendar.

RPW-SC888

Hot Lap In-Car Timing Systems

Complete Timing Systems and replacement parts available. For more information, visit us online, call or e-mail.

Racer's Tape

Color choices are red, blue, green, white, black, silver, yellow, purple and orange.

RPW-RT200 .....2-in. x 60 yd racer's tape

Tommy Tape

This self-fusing, non-adhesive silicone tape can be used for protection and insulation anywhere. It fuses to itself within 24 hours and is capable of resisting temps. of - 65° to + 500° F.
10' rolls, 1" wide.
RPW-VP10001.....6-Pack, Variety of Colors
RPW-TT .....specify white, black, yellow, red, clear or blue

Black Gaffer's Tape

- Industrial grade vinyl-coated gaffer's tape
- Natural rubber adhesive
- Abrasion resistant
- UV resistant

RPW-PC628.....2-in. x 60 yd Black Gaffer's Tape

Safety Wire

Safety wiring remains the most positive and assured method of securing critical fasteners that must not be allowed to back out; any tendency of the fastener to loosen is counteracted by the tightening of the safety wire. Comes in 1-lb., tangle-resistant dispensers.
RPW-SW20 .....020 safety wire
RPW-SW32 .....032 safety wire
RPW-SW41 .....041 safety wire

Tie Wraps

Perfect for attaching roll bar padding, wiring, hoses, etc. When ordering, specify color: black, white, red, blue, green, yellow or orange. Packages of 100.
RPW-TIE4.....**4"**
RPW-TIE8.....**8"**
RPW-TIE11.....**11"**
RPW-TIE14.....**14"**
LAR-47840 .....**8" stainless steel (pkg of 8)**
LAR-47842 .....**14" stainless steel (pkg of 4)**
RPW-73192 **Tie wrap mounting bases (pkg. of 10)**

Anti-Slip Material

- High-traction grit surface
- Keep your feet from slipping off pedals
- Adhesive backed
- 12-inches wide

RPW-3200

Stainless Steel Wire Screen

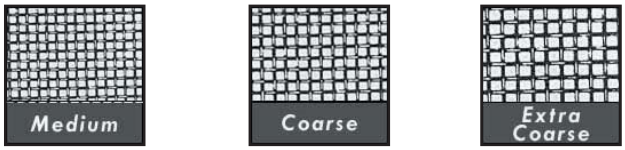

24-inches by 36-inches
RPW-SSM .....**Medium, 8 Mesh 3/32"**
RPW-SSC .....**Coarse, 6 Mesh, 1/8"**
RPW-SSEC .....**Extra Coarse, 4 Mesh, 1/4"**

Race Car Cover

Keep your race car cooler and cleaner between races with this cover from Longacre. The cover is cut specifically for race cars and fits almost all late model stock cars such as All Pro, ASA, Northwest and Southwest touring cars. It has a zippered window to get in and out easily during rain delays! It's moisture-resistant and it's a heat-reflective silver color. Its soft liner won't scratch paint or decals. **LAR-11150**

Steering Wheel/ Helmet Hook

This neat hook bolts onto the roll bar. It's made of lightweight billet aluminum.
LAR-22576 .....1-3/4-inch bar
LAR-22577 .....1-1/2-inch bar

Swiveling Helmet Hook

Moves out of the way when you're working inside the car.
LAR-22571 .....1-3/4-inch bar
LAR-22573 .....1-1/2-inch bar

Ultimate Rain Light

This solid-state, high-intensity, light-emitting diode (LED) cluster comes with complete instructions, mounting template, hardware and a power lead with a weather-proof Sureseal connector.
RPW-URL

RPW Rain Light

Features:
- 13 LED lights
- epoxy resin-coated
- solid state circuitry
- 2-1/2 inches in diameter

RPW-M13300

Visit us online for additional Supplies- we add products online every day!
If you have a product suggestion for Racer Parts Wholesale, let us know by e-mailing your suggestion to info@racerpartswholesale.com.

Longacre Scales

Longacre Computerscales- Accuset

- Push one button for all 4 wheel weights, push a second button for all partial percentages
- Advanced low power consumption electronics run on two 9-volt batteries (included)
- Control box includes the latest stabilization circuitry- numbers won't jump around!
- Ultra flexible red cables with billet AN connectors and gold plated contacts
- Luggage grade silver carrying case protects electronics and stores cables
- 15" LMF light weight, low deflection, low profile scale pads with a smooth top finish
- 1/10 of 1% accuracy
- 1500 lbs per pad capacity
- 2-year limited warranty
- **LAR-72594**

Longacre Computerscales DXI- Semi- Pro Model

- Semi-Pro Model with Swirl Finished Scale Pads
- 15" LMF pads are flat to within 0.010". Elaborate internal webs to minimize flex, yet lightweight (about 15 lbs each!)
- Shows all 4 wheel weights on separated displays
- Shows all partial weights and percentages at the same time
- Customize the 4 line display to your preference, line by line!
- High quality red HiFlex cables with billet AN connectors
- Deluxe silver carrying case protects electronics and stores cables

LAR-72601

Longacre Computerscales DXI Professional Model

- 15" Fully CNC machined pads with single load cells are flat to within 0.050"
- Easy to use memory
- HD yellow cables, billet AN connectors with locking nuts & gold plated contacts
- Low power electronics- runs on replaceable batteries that only need to be changed once a year or less
- Show all 4 wheel weights on separated displays
- Customize the 4 line display to your preference, line by line!
- Deluxe silver carrying case protects electronics and stores cables

LAR-72609

Longacre Computerscales- Wireless Accuset

- Uses the latest wireless protocol for the ultimate in security and reliability
- Push one button for all 4 wheel weights, push a second button for all partial percentages
- Low power consumption electronics run on 6 AA batteries (included)
- 15" LMF light weight, low deflection, low profile scale pads with a smooth top finish
- Transmitters are completely enclosed inside the pads for protection and run on 3 AA batteries (included)
- No antennas to knock off, no modules dangling off the side
- 1500 lbs per pad capacity
- 2-year limited warranty

LAR-72701

Need more information? As one of Longacre's top distributors, we're here to help you decide on the perfect set of scales.
For more information:
Visit us online at www.racerpartswholesale.com
E-mail us at info@racerpartswholesale.com
Call us at 1-800-397-7815 (M-F, 8-5 EST)

Aluminum Turn Plates

- Low profile, only 1" tall
- Reads to 1/2° - degrees can be zeroed with the car on
- Free floating in 2 directions eliminates bind
- Can be used on top of scale pads

LAR-79800 .....aluminum turn plates, pair
LAR-79750 .....roll off spacers, pair

Tire Roll Out Fixture

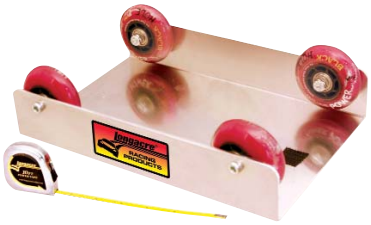

- Check stagger easily and accurately
- Clean or groove tires quickly
- Discover leaks, punctures or tire damage fast
- Convenient design, saves you tons of time and hassle
- Includes 10' stagger tape

LAR-50853

Side Slider™ Slip Plate/Rollers

When you lift your car onto scales, the front wheels camber in at the bottom. As you let the car down, the wheels must move back out freely to equalize. If they can't, they will hold the chassis up slightly, preventing free movement and adversely affecting the weights you get. The result will be inconsistent readings, throwing your setup off.

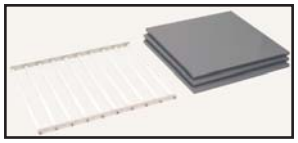

Side Sliders™ relieve any horizontal bind by allowing the wheel and scale pad to roll sideways effortlessly and virtually friction free. You get more consistent wheel weights for the most accurate setups possible, time after time.

- Rolls are made from a tough, low friction polymer
- Install under left front wheel
- 3 spacers are included to re-level your setup
- Use any smooth floor surface

LAR-72870

Individual Scale-Pad Levelers

Easily level complete system in minutes for an accurate set-up anywhere. HD swivel feet. For any model of computerscale pads. **LAR-72900**

Scale Cart & Case

- Compact, takes up less space in the hauler
- Keeps pads and electronics clean and dry
- Electronic case on top can be removed
- Handle telescopes down to save even more space
- Both upper and lower compartments are carpet lined
- Larger 8" wheels roll around easily

LAR-72306

Longacre Handy Scale Cart

Convenient storage at the track or in the shop. Cart holds the control box at just the right height for quick and comfortable viewing. Place your control box right on top and store tools or notebooks in the storage bin. Rolls around the shop and pits with ease. Lid closes for privacy and the pads stay put during transport. Simple assembly required. **LAR-72305**

Scale Storage and Transportation Boxes

- Heavy duty aluminum frame with scuff-resistant sides
- Carpet lined, keeps your 15" pads clean and dry
- Also works well for electronics storage

LAR-72292

Laser Scale Pad Leveler

Advanced Racing Technologies' granite and laser leveling system is priced for the club racer yet is the most accurate on the market! ART starts with its traditional 5x-brighter laser packaged in its factory calibrated custom laser head. Next comes a 6-square-inch, black-granite surface plate with three adjustable legs for the three-point locating laser. ART also adds to the package a two-axis Starrett level to accurately level the scale pads and surface plate. To complete the package, four laser targets are provided for setting accurate scale pad heights to the same horizontal plane. **ART-012A**

Caster-Camber Gauges

FASTRAX Adjustable Caster-Camber Gauge

- Hands-free caster-camber adjustment at the track or in the shop!
- FASTRAX displays camber over +/-4 degrees.
- Caster can be measured from -4 degrees to 12 degrees.
- Hands-free adjustment fits most 13" to 18" wheels.

PPR-9100

FASTRAX optional Toe Adapter

Simply lower and tighten adapter arms. Insert tape measure into slot and measure opposite tire reference point. **PPR-9110**

Bump-Steer Gauge

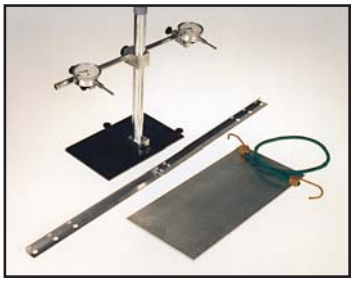

Bump-steer is the measurment of toe change as the suspension travels up and down. Usually none or only a small amount is preferable. The RPW bump-steer gauge has a unique design that allows you to measure bump-steer in two ways: the traditional method that requires you to remove the spring and/or shock from the suspension, and the second method, which uses a universal adapter that mounts to the tire and wheel assembly to take the measurement while the car is completely assembled. The unit comes with a bump-steer plate which allows you to drill it to fit any vehicle bolt pattern. The bump-steer gauge includes two accurate dial indicators, drillable hub plate, wheel and tire assembly adapter, bump-steer plotting graph and instructions. **RPW-9504**

A.R.T. Laser Bump Steer Gauge

Laser accuracy for a bump steer gauge is now available! Using a simple laser, mirror, graph paper, magnetic bases and a shutter, you can now measure bump steer with accuracy up to millionths of an inch. It's affordable, easy to use and accurate. It comes with its own case. **ART-001A**

SmartStrings Alignment Kit

SmartStrings allows for perfect four-wheel alignments on virtually any car, truck or SUV! This tool allows all four wheels to be perfectly aligned to themselves and ensures the front and rear axles will be perfectly in-line or parallel with one another. There is not a product on the market that can even come close to our SmartStrings' versatility, flexibility, accuracy and cost!
SMC-11410

Caster-Camber Gauge

The RPW caster-camber gauge is a precision tool that is adjustable to fit 13", 14" and 15" wheels, and the special off-set posts will clear most cantilever tires. It is made from high-quality aluminum alloy which uses a high-tech bonding process instead of welding to prevent distortion of the unit, maintaining its high accuracy unlike similar units sold elsewhere. It measures from -7 to +7 degrees with 1/8-degree accuracy. It comes with easy-to-use, detailed instructions. **RPW-9500**

SmartCamber

The SmartCamber tool digitally measures camber and caster quickly and easily with complete repeatability. The SmartTool module is removable and can be used for measuring a drive shaft and wing and suspension angles, making it actually two tools in one! It's great for use around the home, shop or track. The Hands-Free Adapter attachment attaches the SmartCamber to the wheel in seconds, as shown.

SMC-1030 ..SmartCamber (module and frame)
SMC-1040 ..SmartCamber complete with Hands-Free Adapter
SMC-1020 ..SmartCamber Frame (only)
SMC-1035 ..SmartCamber Hands-Free Adapter (only)

Digital Caster/Camber Gauge

Here's a super accurate digital caster/camber gauge that reads to 0.1° camber and caster as high as needed! It comes with the carrying case. As an added benefit, the AccuLevel digital read-out can be removed and used separately as a digital angle finder for suspension, spoiler angles and many other things. LAR-78290 (shown) comes with Longacre's latest Super Magnetic adapter.

LAR-78290 .....with magnetic adapter
LAR-78291 .....less adapter
LAR-78292 .....with kart adapter

Longacre Caster-Camber Gauge

- Measures to +/- 8 degrees caster and +/- 6 degrees camber.
- Accurate to 1/4 of a degree.
- Can be used with or without turnplates.

LAR-78260.....c/c gauge with magnetic adapter
LAR-78250.....Gauge and case only; no adapter
LAR-78421.....Billet magnetic c/c adapter only
LAR-78428.....Dunlop Billet adapter only
LAR-78438.....Fine go-kart adapter, 5/8-in.-18
LAR-78445.....Legend car (metric) adapter, 19 mm x 1.5

Visit the Technical Information Section online for product manuals, technical articles and application guides.

Chassis Height Measurement Tool

Works in Three Different Ways:

1. Car on Ground- measures chassis height directly, accurate to 1/16”
2. Car on scale pads- measures from top of pads- ground level- to frame directly (no subtracting needed here)
3. Measures chassis height dynamically, as you work on the car. Magnet holds tape to frame. Indicator shows height as car moves up and down. Use set of 4 to quickly see height at all 4 corners. You don’t even need to bend over!

LAR-78320

LAR-78324

Features:

- 2 lengths- Long Model: 36” for straight rail cars on right side, Short Model: 24” for perimeter frames
- Measures height from 2” to 10” (higher if needed)

LAR-78320 .....**Short Model (1)**
LAR-78322 .....**Short Model (Set of 4)**
LAR-78324 .....**Long Model (1)**
LAR-78326 .....**Long Model (Set of 4)**

Lo-Corners Ride-Height Gauge

- Displays changes in ride height as you adjust from 1/2” to 4-1/2”
- Easy-to-read, accurate display.
- Factory calibrated.
- Perfect for Formula Ford, Formula Atlantic, Formula 2000, Formula Continental, Formula Mazda, Spec Racer and more.
- Rugged design and attractive gold anodized finish.

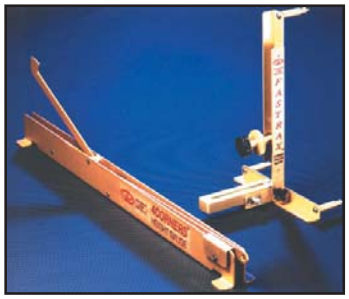

PPR-9010

FASTRAX Four Corners Ride-Height Gauge

Same as PPR-9010, the Lo-Corners gauge, except displays heights from 3” to 7”. **PPR-9000**

A.R.T. Digital Ride Height Gauge

Innovative design. Features:

- Measures ride height from 1- 7 inches
- Resolution of 0.0005/0.01mm
- English or metric digital readout
- 15-inch reach for those hard-to-reach points
- Easy calibration
- Battery powered

ART-1235A

Dreamstick

Our customers say its a dream come true! Used for measuring toe with a string or with our laser string products. Telescoping to fit wheels for 12” to 20”. Scale in English or Metric. No more mis-readings from shaky hands! **ART-013A**

Quick Toe Setting Tool

Here’s the quickest and probably the most accurate way to set toe. Mounts on the wheel to avoid errors. You can even attach a caster camber gauge to either side. Comes with 2 adapters with magnetic legs, 2 tapes and a silver case. **LAR-79630**

Toe Gauge

Our toe gauge is easy and accurate to use. Just place the provided tape on the wheels to be measured and punctured with toe-gauge pointers. Next, roll the car forward and place one end of the toe gauge in the old punched hole and punch a new hole in the other side and measure. A 3/4” metal conduit is not included; buy it and cut to your needed length. **RPW-9503**

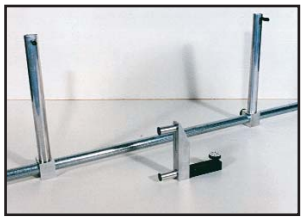

Pictured: RPW-9503 & RPW-9501

Magnetic Caster-Camber Gauge

RPW’s magnetic gauge is adjustable to fit any steel hub or wheel. **RPW-9501**

A.R.T. Laser Toe Plates

Finally laser accuracy is available at an affordable price! An old stand-by is updated with modern technology and accuracy with these laser toe plates. They are 24 inches long. They’re attached to rigid base plates by rod ends to allow tilting of the plates for cambered wheels as well as eliminating toe-angle error induced by sidewall bulge. **ART-011B**

A.R.T. Laser Toe Gauge

With laser precision, this gauge measures as accurately as one minute of a degree (total toe). The system accommodates cars with as little as 12mm of ground clearance, allowing aerodynamic devices to remain in place. Made primarily of aluminum, it weighs less than 20 pounds. It’s easy to set up and use and comes with instructions and conversion tables. **ART-002B**

Toe-In Plates

Here’s the quickest and simplest way to measure toe-in. Rest one of these plates against the tire on each side and use a tape measure. Two tapes are included! **LAR-79500**

Tire Scribe

Use to make a true running line on the face of the tire for toe-in setting. Spring-loaded for easy one-person use. Accurate! **LAR-79610**

AccuLevel Digital Level- Pro Model

- Back light for dark places under car
- Measures suspension, spoiler angles and more!
- Reads to 0.1° from 0 to 90°
- Simple to use, easy to read, accurate
- Can be quickly field calibrated to maintain accuracy
- Used in Longacre's Digital Caster/Camber Gauges
- Includes silver case

LAR-78311

AccuLevel Digital Level- Basic Model

- Measures suspension, spoiler angles and much more!
- Can be quickly field calibrated to maintain accuracy.
- reads 0.1°, accurate to 0.1°
- from 0° to 90°
- simple to use, easy to read.

LAR-78310

AccuLevel Digital Level Tray Adapter

"V" on the bottom sits on suspension arms, magnet holds in place. **LAR-78312**

Digital Dial Caliper

- A precision machinist's tool with all sorts of uses around the shop.
- Reads to 0.001" to 6.000"
- Easy-to-read digital display.
- Includes case.

LAR-73007

Spark Plug Flashlight

- 10X magnification;
- durable and compact.

LAR-50886

TIRELIEFS™ Tire Pressure Relief Valves

- 3- 38 psi range
- Automatically relieves tire pressure build-up as you race
- Lightweight aluminum- only 9 grams- won't affect wheel balance.

LAR-50000 .....set of 4

Valve Core Stem Tool

- Conveniently stores valve cores in the handle
- Durable aluminum with stainless steel tip
- Includes 3 spare cores.

LAR-50270

Pit Impact Gun

- True portability, no air hose to trip over
- High torque - 1/2" drive, 300 ft-lbs - pops lug nuts off easily
- 24 volts for power
- Fast charge NiCad battery
- Variable speed trigger 0-2000 RPM for better control
- Battery charge indicator and LED work lights for dark areas
- Molded rubber grip for comfort

LAR-68602 .....Impact Gun w/1 Battery & Charger
LAR-68604 .....Impact Gun w/2 Batteries & Charger
LAR-68610 .....Set of 2 Impact Guns w/3 Batteries & Charger
LAR-68618 .....Spare Battery
LAR-68620 .....Replacement Charger

Lug Nut Sockets

Tough impact sockets designed to instantly kick out the lug nut.
LAR-68525 .....short impact socket
LAR-68526 .....deep impact socket

Dial Tread-Depth Gauge

Our dial tread-depth gauge is super-accurate! It's calibrated in 1/32-inch increments. It's accurate to 1/128th of an inch (that's less than 0.010 of an inch!) It's easy to read and easy to use.

LAR-50560.....**Gauge with Padded Pouch**
LAR-50562.....**Gauge with Silver Case**

Durometer

Tire hardness changes as tires get older, and it even varies between new tires. Our durometer reads from 0 to 100 points. Be precise! Don't guess!

LAR-50540 .....**Durometer with Padded Pouch**
LAR-50542 .....**Durometer with Silver Case (pictured)**

Durometer and Tread Depth Gauge Set

Includes both the Durometer and Dial Tread-Depth Gauge in a Silver Case. **LAR-50555**

Pit Socket

Thick-walled socket with six-point surface contact and a large chamber ensures fast, clean engagement on the lug nut. Integral spring provides sure ejection of the lug nut from the socket. Manufactured of alloy steel and carefully heat treated for maximum strength and prevention of lug nut damage. For 1"- lug nuts. Fits 1/2"- drive impact wrenches. **BRP-2044**

Longacre

Visit us online for the latest tools from Longacre Racing Products!

Engine Leak-Down Tester

Quickly tell- from the outside- when your engine needs an overhaul! This easy-to-use tester checks ring seal, valves, even head gaskets. Don't wait too long to rebuild that expensive motor, but don't do it too soon, either! **LAR-73010**

Engine Compression Tester

- Easy-to-use.
- Check for bent or leaking valves, bad ring seal, even leaking head gaskets.

LAR-73025 .....0 to 300 psi

Shock Inflation Tool

The Genesis Technologies Shock Inflation Tool is uniquely designed to minimize pressure loss through the tool body and the Schrader Valve Connection Chuck in order to provide the most accurate shock pressure readings in the market. Featuring a 0-1500 PSI liquid filled pressure gauge, the compact size will fit in most tight locations where the shock reservoir may be found. **GEN-GT5020**

Billet Aluminum Oil Filter Cutter

- Cut your old filter open to spot problems before they cost you an engine
- More rigid easy-to-use one piece design
- Billet anodized aluminum, ball bearings
- Cuts filters from 2-3/4" to 5" diamater

LAR-77750

Digital Shock Inflator

300 psi digital gauge, easily reads to 0.5 psi.

- Controlled flow inlet and bleed valves makes precision shock settings much easier
- Special chuck prevents pressure loss and inaccurate settings
- Extra long hose makes filling shocks on car a snap (LAR-50473 only)
- Fill and bleed quickly and accurately
- Connect directly to nitrogen line- no air contamination

LAR-50473 .....**Digital Shock Inflator with Hose (pictured)**
LAR-50483 .....**Digital Shock Inflator Only**

Oil Filter Cutter

Find possible engine damage with our oil filter cutter. The unique, easy-to-use tool opens all popular oil filters. Compact and lightweight, it fits easily into tool boxes. Made from aircraft aluminum with a built-in-handle, this tool will give valuable insight into how your engine is faring. Fits oil filter diameters from 2.5" to 7". Cutter is replaceable. **RPW-9502**

Air Riveter

- Top quality construction, heat treated internal parts for long life.
- For 1/8" to 3/16" rivets, steel or aluminum.
- Fast, reliable operation.
- Holds used mandrills, keeps them off the floor- no flat tires!

LAR-36005

Chassis-Height Checker

Why fool with a tape measure, when this is so quick and accurate?
LAR-22580 .....3-1/2" through 6"
LAR-22582 .....2" through 4"
LAR-22584 .....4" through 7-1/2"

Don't see what you need?
Please visit
www.racerpartswholesale.com
for additional available products
or call us at 1-800-397-7815
or e-mail us at
info@racerpartswholesale.com

Rivet Tool

This industrial-quality hand riveter has a precision diecast body of high-strength aluminum alloy, a fulcrum pin that cannot rotate and a heat-treated, carbon-steel upper handle. Even in high-strength aluminum alloy, the threads into which the working nosepieces is screwed are not strong enough to resist the pulling force of repeated riveting. Engineered to be a long-life unit, this tool has a special steel insert which eliminated the problems common in many imitation tools. Includes nosepieces for setting 3/32"-, 1/8"-, 5/32"- and 3/16"- diameter rivets. **RIV-3900**

Tools & Safety Wire

Wire Tester

6- 12-volt professional electrical tester has insulated mini-gator clips for positive contact and a sharp pierce point for penetrating all low-voltage wiring. Bulb replaceable with #93 standard automotive bulb.
C66-316

Self-Adjusting Wire Stripper

Self-adjusting wire stripper strips 26-10 AWG wire quickly. Cushion-grip handles make crimping easy with crimp nests for insulated and uninsulated terminals. Also included is ignition terminal nest and wire cutter.
P03-90T

Rachet-Crimping Tool

Our ratchet-crimping tool has three separate crimp nests for insulated terminals only. Makes perfect crimps each time by ensuring proper crush is applied to the terminal. Tool will not release until fully crimped.
Crimps 22-18, 16-14, 12-10 gauge. **C66-221**

Assorted Terminal Kit-180 Piece

Includes in-line butt-splices, quick disconnects, 22- 10 AWG closed ring and open spade terminals. **RPW-05107**

Auto Electrical Repair Kit

This handy repair kit contains a voltage tester, crimping tool, fuse puller, test leads and 202 electrical parts for auto, truck, motorcycle and RV repair. This kit needs to be in your trunk or traveling toolbox! **RPW-05207**

Power Tapes

1/4" for stagger, 3/4" for toe-in, wheelbase, etc.
LAR-50870.....1/4" x 10'
LAR-50875.....3/4" x 10'

Safety-Wire Drill Fixture

Hardened drill guide locks your bolt in place while you drill a hole for safety wire. Accepts hex-head, 12-point and socket-head-cap bolt sizes #10 through 5/8". **RPW-9508**

Safety-Wire Twisters

Make your job of safety wiring much easier with these high-quality safety-wire twisters. Available in either a 6" or 9" version with an automatic spring return.
RPW-SW6 .....6" safety wire twisters
RPW-SW9 .....9" safety wire twisters

Safety Wire

Safety wiring remains the most positive and assured method of securing critical fasteners that must not be allowed to back out; any tendency of the fastener to loosen is counteracted by the tightening of the safety wire. Comes in 1-lb., tangle-resistant dispensers.
RPW-SW20.....020 safety wire
RPW-SW32.....032 safety wire
RPW-SW41.....041 safety wire

Safety Wire Kit

Buy the complete kit and save! Kit includes one spool each of .020, .032, .041 safety wire; safety wire twister pliers; drill fixture and storage box. **RPW-SWKIT**

Stainless Header Wrap Ties

Holds header insulation in place. Stays tight and is heat-resistant.
LAR-47840 .....8-in. (8 in pack)
LAR-47842 .....14-in. (4 in pack)

Header Insulation 'Tape'

- Contains exhaust heat for better velocity, scavenging and more power, plus cooler under-hood temps;
- 2-in. x 100-ft. roll is enough for most V8 headers

LAR-64850.....100-ft. x 2-in., 1/16-in. thick
LAR-64870.....50-ft. x 2-in., 1/16-in. thick
LAR-64830.....50-ft. x 2-in., 1/32-in. thick
LAR-64880.....25-ft. x 2-in., 1/32-in. thick
LAR-64835.....10-ft. x 2-in., 1/32-in. thick

Sign up online for our e-newsletter!
Be the first to hear about new products, specials, new technical articles and more!

Save time and fingers from the frayed ends of a braided hose!

Since the invention of stainless steel braided hose, racers and mechanics have been fighting the problem of installing it into the socket part of the assembly. KOUL tools has delivered a solution that makes the assembly a snap. Manufactured of high tech composite, it is virtually indestructable. KOUL tools are simple to use and will save time and fingers from the frayed ends of a braided hose. After choosing the correct KOUL tool for your fitting's socket size, simply place the socket and adaptor (if required) into the KOUL tool and clamp it into a vise. Lube the conical entrance and twist the hose into the socket and in less than 10 seconds you have it assembled!

KOUL Tools Small Kit

The small kit contains the capsules to install -4, -6 and -8 hose into their respective sockets. To accomodate all the different manufacturer's fittings, spacers and sleeves are required to tighten up some of the sockets within the capsule. In the small kit, only the Russell -4 needs a sleeve. The #8 spacer is used for the -8 sockets. **KOU-468**

KOUL Tools Large Kit

The large kit contains the capsules to install -10, -12 and -16 hose into their respective sockets. To accomodate all the different manufacturer's fittings, spacers and sleeves are required to tighten up some of the sockets within the capsule. For the tool to perform at it's best, the socket needs to be a snug fit within the capsule. In the large kit, all the -16s except Russell's require the sleeve and a rear spacer. See the instructions in the case for the proper spacer number. Most of the #10s will use the #10 spacer. **KOU-1016**

KOUL Tools Pro Combo

This kit includes capsules to install -4 through -16 hose!
KOU-416

Billet Coil-Over Wrench

- Billet Designs keep coil overs looking new.
- Replaceable stainless steel pin.
- Comfortable handle makes adjustments easy.

LAR-22589

Small Aluminum AN Wrenches

These neat and convenient wrenches will help protect your expensive fittings.
LAR-22596 .....#3
LAR-22597 .....#4

AN Wrenches

The three double-ended RPW wrenches cover the six most-popular AN fitting sizes of 6, 8, 10, 12, 16 and 20. Made of heat-treated aircraft aluminum, these AN open-ended wrenches are machined to close tolerances to minimize marring of anodized fittings. The compact design reduces the danger of over-tightening. These light-weight RPW wrenches with permanent, engraved numbers and stress-relieved corners for maximum contact will give years of satisfaction.

RPW-9506.....2-pc. set- 6/8, 10/12 wrenches
RPW-9507.....3-pc. set- above plus 16/20 wrench

Angle AN Wrenches

These double-ended RPW wrenches cover the most-popular AN fitting sizes of 6, 8, 10, 12, 16 and 20. Made of heat-treated aircraft aluminum, these AN wrenches are machined to close tolerances to minimize marring of anodized fittings. The compact design reduces the danger of over-tightening. Also features permanent, engraved numbers, stress-relieved corners of maximum contact and 15-degree offset.

RPW-9512 .....4-pc. set- 6, 8, 10, 12
RPW-9513 .....6-pc. set- 6, 8, 10, 12, 16, 20

Low Profile AN Wrench

The Low Profile AN Wrench is perfect for those hard to reach and cramped fitting locations. The palm sized handle is offset from the wrench head for more versatility and ease of use. Uniquely designed for multiple wrench orientations, the low profile AN wrench is laser cut from mild steel and designed to reduce fitting damage that is common in AN wrenches, by moving the contact points away from corners. Protected by a nickel plate finish with laser-marked wrench sizes for easy identification.

GEN-GT5140 .....-6 AN
GEN-GT5141 .....-8 AN
GEN-GT5142.....-10 AN
GEN-GT5143.....-12 AN
GEN-GT5144.....-16 AN
GEN-GT5145.....-20 AN
GEN-GT5160 .....Complete AN Kit

Low Profile AN Crowsfoot

Designed to the same specifications as the low profile AN wrench, the Crowsfoot is made to fit a 3/8" socket drive wrench or extension in order to help reach into the most difficult fitting locations. Made from 5/16" thick mild steel, the low profile crowsfoot is nickel plated for added protection and has laser etched AN sizes for easy identification.

GEN-GT5150 .....-6 AN
GEN-GT5151 .....-8 AN
GEN-GT5152 .....-10 AN
GEN-GT5153 .....-12 AN
GEN-GT5154 .....-16 AN
GEN-GT5155 .....-20 AN
GEN-GT5161 .....Complete AN Kit

Pyrometers & Tire Gauges

Deluxe Memory Tire Pyrometer

Displays all 12 tire temps at the same time! It's easy to use, and makes taking temps a one-person job! Memory stores 10 complete sets of temps (120 total) with quick and easy recall. Take temps in the pre-programmed order or select any order you prefer. Advanced electronics stabilize your readings quickly, giving you more accurate, consistent results. It comes with a built-in night light with an automatic shutoff, fast-response coiled cord tire probe and a carrying case.

Features:

- 12-temp display
- 10-set memory
- Temp averaging
- Built-in night light
- Carrying case and probe
- Takes temps in any order
- Built-in four car, 75-lap memory stopwatch
- Electronics stabilize readings for consistent results.

LAR-50690 ....Memory tire pyrometer

Dual Function- Infared Laser Pyrometer Plus Probe

- Use as a probe type pyro for tires OR a non-contact IR pyro
- Accurate, fast response in either mode
- 1400° range on IR, 500° range w. tire probe
- °F or °C switchable
- Includes new silver case.

LAR-50620

Infared Laser Pyrometer

- Instant response, non-contact temps
- °F or °C up to 600°. • Back lite for night use
- Laser sighting for accuracy
- Holds readings longer for easier use

LAR-50612

Economy Pyrometer

- Accurate, fast response.
- Straight cord tire probe.
- 1400° range (w/ proper probe), F° or C° switchable.

LAR-50635

Accutech Deluxe Digital Tire Pyrometer

- Compares one temp to another with the push of a button.
- Accurate, super-fast response electronics.
- "Holds" highest temperature reached.
- Low battery indicator and auto shut-off.
- 2,000-degree range, °F or °C switchable.
- Coil cord tire probe and carrying case.

LAR-50640

Infared Memory Laser Pryometer

- 12 temperature Memory!
- Up to 1000°F by 0.1°
- Laser sighted and comes w/protective pouch.

LAR-50614

Tire Gauges

Deluxe Tire Gauge- Our deluxe high-accuracy gauge comes with a large psi-scale and a 2-1/2-inch face for quick, error-free readings. It has a special shock-resistant rubber gauge protector & an extra-long, 14-inch swivel hose. It has a super-quick bleed valve. It's simply the best! Available in the following ranges: 0-15 PSI, 0-30 PSI, 0-60 PSI, 0-60 PSI Liquid Filled and 0-100 PSI. **RPW-S**

Standard 0-60 psi Tire Gauge- Same as the deluxe tire gauge, however the hose whip is replaced with a straight, 14-in flexible hose with non-swivel chuck. **RPW-B60**

Complete Tire Gauge w/Hold Feature- Our complete tire gauge features a high flow pressure release button and swivel chuck. Made with a straight, 14-in. flexible hose, this gauge holds pressure until released. Available ranges: 0-15 PSI, 0-30 PSI, 0-60 PSI and 0-100 PSI. **RPW-S-H**

Magnum Tire Pressure Gauges

- Huge 3-3/4-inch glow-in-the-dark face for high accuracy & easy readability
- Internal gauge damper for more accurate readings & longer life
- Hi-flow release button and swivel chuck
- Holds pressure until released
- Ultra-flexible 17-inch hose
- Comes with a padded pouch.

LAR-50404 .....0-60 by 1 lb
LAR-50424 .....0-30 by 1/2 lb
LAR-50454 .....0-15 by 1/4 lb

Lightweight Air Tank with Filler Tire Gauge

Special inlet valve fills tank in less than 15 seconds! Saves time topping off tires. Tank tops off 4 tires. Includes Quick Fill Tire Gauge (except LAR-50316)

LAR-50310 .....Air Tank with 0-60 psi Digital Gauge & Angle Chuck
LAR-50314 .....Air Tank with 0-60 psi Digital Gauge & Ball Chuck
LAR-50316 .....Air Tank, No Gauge

Quick-Fill Tire Gauge

Fill your tires twice as fast as you're used to doing; we're not kidding! Take a reading without removing the fill chuck! This gauge features a bleed button for excess pressure and a large, accurate, glow-in-the-dark gauge face.

LAR-50406 .....0-60 psi
LAR-50426 .....0-30 psi
LAR-50456 .....0-15 psi

Standard Digital Tire Gauge

- 0 to 100 psi • reads to 1/2 lb.
- Air pressure release button
- External gauge bumper
- Ultra flexible 14-inch line.

LAR-50348

Longacre Digital Tire Gauge with Back Light

- Battery indicator on display
- Auto off feature to save battery
- Easy to read and super accurate- to 0.1 psi
- With angle chuck

LAR-50356 .....**0-60 PSI**

For more tire gauges, pyrometers, accessories and replacement parts, please visit www.racerpartswholesale.com

Club Series Race Mirrors

Very low aerodynamic drag; all mirrors come standard with convex glass; viewing area for CES mirrors is 6 square inches; viewing area for CRS and CGT mirrors is 8.6 square inches.

CES-CFA.....Elliptical shape, carbon fiber w/angle stem
CES-CFS.....Elliptical shape, carbon fiber w/straight stem
CES-FGA ....Elliptical shape, fiberglass w/angle stem
CES-FGS ....Elliptical shape, fiberglass w/straight stem

CRS-CFA ....Rectangular shape, carbon fiber w/angle stem
CRS-CFS ....Rectangular shape, carbon fiber w/straight stem
CRS-FGA ....Rectangular shape, fiberglass w/angle stem
CRS-FGA ....Rectangular shape, fiberglass w/straight stem

CGT-CFA.....GT style, carbon fiber w/angle stem
CGT-CFS.....GT style, carbon fiber w/straight stem
CGT-FGA ....GT style, fiberglass w/angle stem
CGT-FGS ....GT style, fiberglass w/straight stem

Wink Panel Mirrors

This interior panel mirror features 4 or 5 flat panels and can be mounted with clamps or brackets. The mirror is 2.5" tall.
WIN-91514 .....4-panel, 27-inches wide
WIN-91515 .....5-panel, 34-inches wide

Longacre Mirrors

Quick and easy installation; won't vibrate loose.
14-inch mirror kit with 1/2-inch to 2-1/2-inch range bolt-on brackets.
LAR-22534.....1-3/4-inch
LAR-22535.....1-1/2-inch bar

14-inch mirror kit with 2-inch to 5-1/2-inch range bolt-on brackets.
LAR-22536.....1-3/4-inch
LAR-22537.....1-1/2-inch bar

17-inch mirror kit with 1/2-inch to 2-1/2-inch range bolt-on brackets.
LAR-22530.....1-3/4-inch
LAR-22531.....1-1/2-inch bar

17-inch mirror kit with 2-inch to 5-1/2-inch range bolt-on brackets.
LAR-22532.....1-3/4-inch
LAR-22533.....1-1/2-inch bar

LAR-22544.....14" Replacement Mirror
LAR-22547.....17" Replacement Mirror

SPA Design Convex Sports Car Mirror

Available in carbon fiber or black or white high-impact nylon. Includes mounting stem with ball joint. Mirror measures 8.5" by 2".

SPT-SCCB-1 .....Convex Sports Car mirror, black
SPT-SCCW-1.....Convex Sports Car mirror, white

3-3/4" Spot Mirror- Bolts On

Mounts on driver's or passenger's side, adjusts easily and bolts in place solidly.

LAR-22548 .....for 1-3/4" bar
LAR-22549 .....for 1-1/2" bar

SPA Steering Wheels

SW 011 S BLK.....(pictured) 255mm flat bottom, suede steering wheel, undrilled
SW 013 S BLK.....270mm round, black suede

Longacre Aluminum Steering Wheels

Lightweight aluminum spokes with smooth grip. Wheels have a high grip polyurethane coating. Black.
LAR-56830 .....**13" wheel**
LAR-56801 .....**15" wheel**
LAR-56811 .....**17" wheel**

Hi Density Steering Wheel Nose Pad

- Uses material similar to our Hi Density roll bar padding for better protection
- Triangular shape improves safety and visibility of dash

LAR-56890

Steering Wheel Nose Pad

Standard nose pad required by most rules.
LAR-56899

Button-Style Hub

Our button-style quick-release hub has a spring-loaded button release so that there are no pins to fall out and get lost. The hub is constructed of high-quality aluminum and the 1"-hex shaft is constructed of strong steel which is easy to weld to most steering shafts. Highest quality construction.

RPW-186.....**For 5/8" shaft**
RPW-188.....**For 3/4" shaft**

Sleeve-Style Hub

This hub has a spring-loaded sleeve that releases three separate lock balls when the sleeve is squeezed against the back of the hub. The hub is tapped for three 1/4-28 bolts on a 1.75"-bolt circle for attaching the steering wheel. Hardware for attaching the steering wheel is included.

RPW-177 .....for 5/8"-dia shaft.
RPW-178 .....for 3/4"-dia shaft

Splined-Sleeve-Style Hubs

Stock-car type, heavy duty splined quick-release hub. Steel-center spline with aluminum hub.

BRP-167.....for 5/8"-dia. shalf
BRP-168.....for 3/4"-dia. shaft

Dzus Style Fasteners & Rivets

Dzus Style Fasteners

Every fastener is based on the rugged spiral cam stud and spring-wire receptacle design. They're much better than other 1/4-turn type fasteners, especially after prolonged use The fastener provides a firm locking tension with a crisp and positive lock. The end of the stud cam presents a solid over-rotation stop. Wear is minimal and performance is maintained over thousands of use cycles. Stud shanks are smooth, with no pins or lugs to hang up in support holes. 4/16"-diameter. Packages of 10 pieces.

Slotted Oval Head Stud

Self-Ejecting Fastener

Self-Ejecting Winged Fastener

Spring Receptacle

Slotted-oval-head studs (10 pack)

DFH-5600 .....Oval-head stud-.600" (grip length)
DFH-5500 .....Oval-head stud-.500" (grip length)

Self-ejecting fasteners (10 pack)

DFS-5600 .....Head stud-.600" (self-ejecting)
DFS-5500 .....Head stud-.500" (self-ejecting)
DFS-W5600.....0.600" winged fastener (grip length)
DFS-W5500.....0.500" winged fastener (grip length)

Spring Receptacles (10 pack, use 1/8" rivets)

DFS-R5200 .....0.200" spring receptacle
DFS-R5225 .....0.225" spring receptacle
DFS-R5250 .....0.250" spring receptacle
DFS-R5275 .....0.275" spring receptacle
DFW-P9400.....weld plate for self-ejecting studs (.062" thick)

Transfer Punch

Place these into the weld plates, hold body panel up and give a tap. The marks are transferred to the panel, showing exactly where to drill! Pkgs of 10.

PAN-8421 .....For 5/16-inch buttons
PAN-8420 .....For 7/16-inch. buttons

Countersink

Put the proper angle countersink in sheet metal to use flush button.

MOR-71005

Moroso Button Tools

A screwdriver is not the tool to use on panel fasteners. These have the correct radius and will prevent jumping out of the fastener.

MOR-71606.....Screwdriver
MOR-71600.....Wrench (pictured)

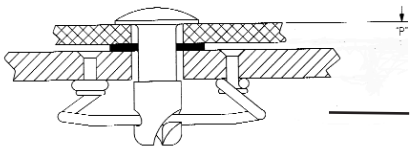

Total Receptacle Pileup

Button length is easily calculated by adding the thickness of the material total, including the weld plate and the spring height, as shown in the diagram to the left.

Rivets

These rivets are high-quality, high-strength, American-made rivets that meet tough IFI standards. They can be used in either blind-side applications or where both sides of the work are accessible. They're vibration-resistant, tamper-resistant and provide secure fastening of thin and thick applications and hard and soft materials. Both the rivets and mandrels are aluminum. Packages of 250.

Part #	Hole x max grip length	Flange	Color
RIV-S11B	1/8 x 1/8	small	Silver
RIV-S12B	1/8 x 1/4	small	Silver
RIV-S13B	1/8 x 3/8	small	Silver
RIV-S14B	1/8 x 1/2	small	Silver
RIV-L12B	1/8 x 1/4	large	Silver
RIV-S22B	3/16 x 1/4	small	Silver
RIV-S23B	3/16 x 3/8	small	Silver
RIV-S24B	3/16 x 1/2	small	Silver
RIV-L22B	3/16 x 1/4	large	Silver
RIV-L23B	3/16 x 3/8	large	Silver
RIV-L24B	3/16 x 1/2	large	Silver
RIV-C12B	1/8 x 1/4	countersunk	Silver

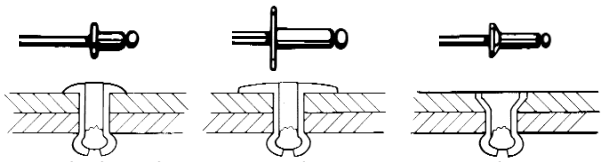

Standard Head | Large Flange | 120-degree Countersunk

Colored Rivets

Part #	Hole x max grip length	Flange	Color
RIV-LW23B	3/16" x 3/8"	Large	White
RIV-LR23B	3/16" x 3/8"	Large	Red
RIV-LU23B	3/16" x 3/8"	Large	Blue
RIV-LB23B	3/16" x 3/8"	Large	Black

Racing Rivet Kit

Contents include: 50 rivets per bin of large and small head 3/16" diameter aluminum rivet body with steel nail. Finish includes silver, white, black, red, pepsi blue, chevron blue, purple, yellow and orange. Also includes aluminum back up washers, expanding blindside hole filling with silver finish and rivet tool. One bin contains 1/8" diameter silver rivets. Durable 12" x 18" x 3" container.
RIV-RRK

Rivet Tool

Engineered for long life, this tool includes nosepieces for setting 3/32"-, 1/8"-, 5/32"- and 3/16"- diameter rivets.
RIV-3900

Backup Washers

RIV-B1 .....1/8"- alum. backup washers
RIV-B2 .....3/16"- alum. backup washers

Circuit Breaker Panels

Simplify many automotive wiring projects with these 4 gang circuit breaker panels featuring automatic reseting circuit breakers, 10-32 stud terminals, common input bus bar and all metal mounting bracket. Available in 10 or 20 amp configurations for 12 volts.

FAS-950-000 ..2-10 amp & 2-20 amp CB panel

Panel Mount Circuit Breaker

Design your own circuit protected switch panel with these easy to use panel mount circuit breakers. Features include push button manual reset, 1/4" push on terminals and the necessary hardware to mount in a 7/16" hole. Available in four amperage ratings.

FAS-502-161 .....10 amps
FAS-502-162 .....15 amps
FAS-502-163 .....20 amps
FAS-502-164 .....30 amps

Fuseholders

Inline ATC Fuseholder - 10 Gauge
FAS-500-002

Fuse Kit

ATO/ATC automotive fuse assortment. Contains a total of 15 fuses, 3 each of the following values 5, 10, 15, 20, and 30 amp.
FAS-501-109

Centech AP-2 Dual Fuse Panel

The AP-2 is divided into two electrical sections. The main section contains three fuses & feeds five outputs while the second section has two fuses & three outputs. The AP-2 can be connected directly to the battery or to your ignition switch. Each AP-2 comes complete with fuses & necessary hardware, instructions & one year warranty. **CEN-AP-2**

Relay and Socket Assembly

12V SPDT 30 amp relay and prewired socket with 12" leads. Many uses include controlling fuel pump, water pump, fans, or any other high current accessory. Diagram included.
FAS-900-000

Weather Pack Connector Kits

Wire like the pros with these locking weather pack connector kits. Silicone seals protect against dust, dirt, moisture, and ensure a fail-safe connection. Connector kits are Available in one through six pin configurations and include connector bodies. Male and Female 16-14 gauge terminal pins and green seals.

FAS-401-101 .....One pin
FAS-401-102 .....Two pin
FAS-401-103 .....Three pin
FAS-401-104 .....Four pin
FAS-401-106 .....Six pin
Replacement Pins (5 male and 5 female)
FAS-401-111 20-18
FAS-401-112 16-14
FAS-401-113 12-10

Pin Extraction Tool

Required for safe removal of pins from weather-pack housing.
LAR-44909

Weather Pack Crimp Tool w/Crimp Dies

- Use with weather pack connector kits
- Rachet style crimper ensures a positive connection
- Fast and easy
- Add the spark plug dies to make your own plug wires

LAR-44905

Terminal Strip Kit

- Use to eliminate splicing and simplify many automotive wiring projects
- Contains 3 quality double row terminal blocks (4,6 and 8 position) with 6-32 screws and 40 16-14 gauge nylon double crimp ring terminals.

FAS-940-200

Ground Terminal Strip

This common bus brass terminal strip is the best and right way to create a ground circuit for your dash area or accessories. Has (10) 8-32 screw terminals and (2) 1/4-20 supply studs on an insulated base with mounting holes.
FAS-406-210

Battery Connector

Battery jump plugs are used for jump-starting cars on the grid. The Interlock connector cannot be mis-connected.
RPW-100101 ..175-amp plug half

Battery Thru Panel

For safely running battery cable through your firewall; prevents shorts. **LAR-45700**

Battery Jumper Posts

Makes it easier to jump-start or charge the battery; color-coded red and black.
LAR-45720 ..red, positive
LAR-45740 ..black, negative

Battery Lugs

- Flared end for easy cable insertion
- Heavy duty copper lugs
- For #2 or #4 cable
- Can be crimped or soldered
- Sold in packs of 4

FAS-405-112 .....#4 gauge, 5/16" hole
FAS-405-113 .....#4 gauge, 3/8" hole
FAS-405-012 .....#2 gauge, 5/16" hole
FAS-405-013 .....#2 gauge, 3/8" hole

Deluxe Battery Cable Kit

Everything you need to wire your car! Includes:

- solenoid and battery disconnect switch
- factory soldered ends for quick, simple installation
- ground cable and all cables from battery to switch
- starter cable heat-protected with firebraid.

LAR-48115

Pre-Cut Heat Shrink

1-1/4" long dual-wall heat shrink pieces with adhesive liner allows you to quickly secure & weatherproof all crimp terminals, wire splices & connections.
FAS-404-011 .....1/4", 20 pack
FAS-404-012 .....3/8", 15 pack

For additional information and electrical products, please visit the Electrical and Ignition Category Online.

Batteries & Chargers

Odyssey Batteries

The Odyssey battery combines in one box the characteristics of two separate batteries. It can deep cycle as well as provide enormous cranking power. These batteries are capable of providing engine cranking pulses in excess of 1700A for five seconds as well as 400 charge/discharge cycles to 100 percent depth of discharge (DOD). Odyssey batteries will provide short-duration high amperage pulse or low-rate with long-duration drains.

Features:

- guaranteed longer service life (with a 10-year design life and a three- to eight-year service life, Odyssey saves you time and money because you won't have to replace the battery as often)
- superior cranking and fast charge capability (The five-second cranking power of Odyssey batteries is double to triple that of equally sized conventional batteries, even at low temperatures)
- mounting flexibility (The Odyssey battery may be installed on its sides at any angle)
- superior vibration resistance
- two-year storage life when fully charged
- deep discharge recovery

PC545MJ .....for race cars and motorcycles .....12 pounds. Dimensions: 6-7/8-in. long, 3-1/4-in.wide, 6-5/8-in.high; 12 Ah@10-hour rate; 280 CCA; 545 pulse cranking amps

PC680MJT .....for automotive, race cars, motorcycles & ATVs ....15.4 pounds. Dimensions: 6-5/8-in. long, 7-1/16-in. wide, 6-5/8-in. high; 16 Ah@10-hour rate; 280 CCA; 680 pulse cranking amps

PC925MJT .....for heavy-duty automotive, motorcycles & ATVs ..26 pounds. Dimensions: 6-5/8-in. long, 7-1/16-in. wide, 5-13/16-in. high; 26 Ah@10-hour rate; 470 CCA; 925 pulse cranking amps; comes with SAE automotive terminals

PC1200MJT ....for heavy-duty automotive, motorcycles & ATVs ..38.2 pounds. Dimensions: 7-13/16- in. long, 6-9/16-in. wide, 7-9/16-in. high; 42 Ah@10-hour rate; 630 CCA; 1200 pulse crank amps; comes with SAE automotive terminals

Odyssey Battery Hold Downs

Custom made billet battery mounts for the Odyssey PC680, PC925, PC1200 series. Set comes with the battery tray, cover, posts and hardware. Lightweight and durable billet aluminum with four 3/8" NHRA approved mounting holes in tray.

ODY-680HDB.....PC680 billet aluminum hold down
ODY-925HDB.....PC925 billet aluminum hold down
ODY-1200HDB.....PC1200 billet aluminum hold down

Odyssey Ultimizer Battery Chargers available. Please visit the Odyssey Category online for details.

CTEK US 800 Battery Charger

- Easily charges all small batteries.
- Excellent maintenance charger for seasonal vehicles.
- Charges lead-acid batteries (Wet, MF, Gel and AGM) from 1.2Ah to 32Ah, 1.2Ah to 100Ah for maintenence charging.

CTK-56171

CTEK Multi US 3300 Battery Charger

- Especially well-suited for automotive use.
- Fast recharging and powerful maintenance performance, even in the coldest weather conditions.
- Charges lead-acid batteries (Wet, MF, Gel and AGM) from 2 Ah to 90 Ah.
- Three modes for small batteries, large batteries and a cold mode that is suitable for AGM batteries.

CTK-56158

CTEK Multi US 7002 Battery Charger

- Thorough 7-step process for charging, reconditioning and maintenance.
- Also functions as a power source, enabling in-place battery recharging w/ no loss of power to the vehicle or to the memory of vehicle electronics.
- Four options: 14.4V, 14.7V, 13.6V/Supply & 16V/Boost.

CTK-56159

Ctek Comfort Indicator Panel

Perfect for all CTEK 12V battery chargers with Comfort Connect. 8.4mm eyelet terminal, 150cm cable, 15A fuse.
Size: 35mm x 21mm x 50mm **CTK-56380**

Ctek Comfort Indicator Eyelet

Perfect for all CTEK 12V battery chargers with Comfort Connect. 8.4mm eyelet terminal, 55cm cable, 15A fuse
CTK-56382

Ctek Cigarette Connection Plug

For CTEK chargers with new style connector leads. **CTK-56263**

Battery Tender® Battery Charger

Differs from a trickle charger in that it automatically switches from a full charge to a float-charging mode and then monitors the battery. You can leave the Battery Tender® connected to a battery for extended periods of time without worrying about boiling or overcharging the battery. Check fluid level monthly. **BAT-TENDER**

Visit us online for additional Batteries, Chargers and New Products!

Battery Disconnects & Electrical Products

Longacre Battery Disconnect Switches

with matching panel

switch only

- Manual battery disconnect switch with a bright red handle
- Easier to find in an emergency
- Prevents battery drain
- 175 AMP continuous rating, 6-36 volt, 1000 peak

LAR-45750.....2 term. for cars without alternator, switch only
LAR-45761.....2 term. for cars without alternator, in matching panel
LAR-45780.....4 term. for cars with or without alternator, switch only
LAR-45785.....4 term. for cars with or without alternator, in matching panel

Battery Disconnects

These cut-off switches cut off the battery, protecting diodes against burn out. Use them to disconnect the engine.
RPW-28606 (pictured) is the first and only one fulfilling all safety demands. Use this one on cars with alternators. It comes complete with a removable red handle, a waterproof cap, protective resistor and installation instruction. It's not legal in the NHRA. **RPW-28606**
C41-860 is the same as above except it doesn't include the protective resistor and additional switching circuits for auxilary functions or a protective cap. It's not legal in the NHRA. **C41-860**

Calterm Heavy-Duty 12-Volt Off-Road Switches

A. Heavy-duty toggle switch w/rubber boot
C-41800

B. Heavy-duty, push-button starter switch, 60 amp, 5/8"-hole
C-41840

A

B

Weatherproof Switches

Switches are completely sealed with a polyurethane coating (weatherproof switch covers inc.). The back side of these switches are sealed and weatherproofed with a tough, waterproof polymer coating to keep out dirt, dust, and moisture that can turn a critical switch into a useless dead end connection, possibly putting you out of a race.

LAR-45423 .....HD 40 amp ignition switch
LAR-45466 .....starter button
LAR-45753 .....battery disconnect 2 terminal

Ignition/Start Switch Combo

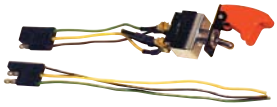

Down is off; middle is "ignition on," up is momentary start. Includes pre-wired with color-coded harness and flip-up switch cover; Simple to install; one switch does it all. **LAR-45490**

Posi-Lock Connectors have been put to the test worldwide since 1997. Superior in-line splices with just hand tightening! These electrical connectors are crimp in-line splices. An electrical connector that meets the needs of todays OEM's, and is so good, it's reusable. Truly a connector for the 21st century. Temperature Range is -23ºC to 120ºC. Sold in packages of 5.

Posi-Lock 10-12 Gauge

Posi-Lock PL1210 Yellow
- 10 and 12 gauge wires
- Diameter: 9.6 mm Length: 38.2 mm
- Max. Insulation Diameter:5.2 mm

POS-PL1210

Posi-Lock 14-16 Gauge

Posi-Lock PL1416 Blue
- 14 and 16 gauge wires.
- Diameter: 7.16 mm Length: 27.4 mm
- Max. Insulation Diameter:3.7 mm

POS-PL1416

Posi-Lock 18-24 Gauge

Posi-Lock PL1824 Red.
- 18, 20, 22, 24 gauge wires.
- Diameter: 7.16 mm Length: 27 mm
- Max. Insulation Diameter:3.2 mm

POS-PL1824

Posi-Tap connectors allows you to tap into wires without cutting! It installs in seconds by hand, with no crimping or tools required. Total wire integrity is maintained and it powers up to 4 leads at once. It has less resistance, is vibration proof and fully insulated. Sold in packages of 5.

Posi-Tap 10-12 Gauge Wire

- Powers (1) 10 or 12 gauge accessory leads.
- Max Accessory OD .205" (5.2 mm)
- Max Tap OD .145" (3.7mm) 12 ga, Min Tap OD .085" (2.18mm)

POS-PT1012Y

Posi-Tap 12-18 Gauge Wire

- Powers (1) 12, (2) 14, (3) 16 or (4) 18 gauge accessory leads
- Max Accessory OD .205" (5.2 mm)
- Max Tap OD .145" (3.7mm) 12 ga, Min Tap OD .085" (2.18mm)

POS-PT1218B

Posi-Tap 16-18 Gauge Wire

- Powers (2) 20, (1) 18, or (1) 16 gauge accessory leads.
- Max Tap OD .105" (2.7 mm) 16 ga, Min Tap OD .072" (1.85) 20 gauge
- Max Accessory OD .125" (3.2 mm)

POS-PT1618

Posi-Tap 20-22 Gauge Wire

- Powers (2) 20, (1) 18, or (1) 16 gauge accessory leads.
- Max Tap OD .075" (1.85) 20 ga, Min Tap OD .065" (1.65)
- Max Accessory OD .125" (3.2 mm)

POS-PT2022R

Bolt Kits

We now have the most commonly used aircraft hardware items combined into four convenient kits for the workshop and race track. These assortments come with a storage box and contain enough hardware for maintenance and repair.

Airframe Washer and Jetnut Kit (pictured): contains 100 each thick and thin AN 960 steel flat washers in each size: #10, 1/4", 5/16" and 3/8". Also contains 25 each #10- #32 and 1/4"-28 and 25 each 5/16"-24 and 3/8"-24 all-metal jetnuts. Includes storage box. **RPW-H225J**

Airframe Washer and Aircraft Locknut Kit: contains 100 each thick and thin AN 960 steel flat washers in each size: #10, 1/4", 5/16" and 3/8". Also contains 10 each AN 364 half-height and AN 365 full-height nylon insert locknuts and 10 MS 21042 all-metal, self-locking jetnuts in each size: #10-32, 1/4"-28, 1/4"-28, 5/16"-24, 3/8"-24. Includes storage box. **RPW-H225L**

AN Washer Kit: contains an assortment of AN 960 steel flat washers (gold cadmium plated). Regular thickness is 1/16"; light thickness is 1/32". Includes storage box. **RPW-H225W**

AN Airframe Bolt Assortment: The assortment for each bolt diameter contains a selection of bolts with lengths up to 3". Grips (unthreaded shanks) are provided in 1/4" increments through the range of lengths supplied. AN airframe bolts are hex-head, fine-thread fasteners with a tensile strength of 125,000 psi and a shear strength of 75,000 psi. These are the most commonly used aircraft bolts, and they're vastly superior to "Grade 8" tension bolts for race car chassis applications. NOTE: Each diameter is sold separately.

RPW-H2254 .....#4 bolt
RPW-H2255 .....#5 bolt
RPW-H2256 .....#6 bolt

ThreadLockers

ThreadLockers are anaerobic compounds that lock and seal nuts, bolts, bearings, etc.

VAL-71620.....**Med., 10 ml**
VAL-71621.....**Med., 50 ml**
VAL-71622.....**High, 10 ml**
VAL-71623.....**High, 50 ml**

Cushion Clamps

- Heavy duty plated steel neoprene cushioned clamps
- Use to secure hoses, fuel lines, wire harnesses & cables
- Clamps have a 1/4" mounting hole

FAS-403-500 .....1/4", 10/pk
FAS-403-501 .....3/8", 10/pk
FAS-403-502 .....1/2", 10/pk
FAS-403-503.....5/8", 8/pk
FAS-403-504.....3/4", 8/pk
FAS-403-505.....7/8", 7/pk
FAS-403-506.....1", 6/pk

Slide Latches/Cad Plated

Slide latch parts consist of a slotted sliding bar assembled to a mounting plate and gripped in its grooved section by the sliding bar, a spacer which raises the bush to clear thick panels. The sliding bar assembly is attached to the removable panel and the bush is mounted to the panel's stationary support. When closed, the spring action of the bar resists opening under vibration and shock loads. The latch is sold with the handle pointing downward for mounting on the underside of the panel. **DFL-A1500**

Toggle Latches

Toggle latches are an effective way to fasten body panels and engine covers for fast removal. The best use is where fastener components can't enter into the fastener equipment. They will accept 1/8"-rivets or #6 round-head screws. Latches have a working rating of 100 lbs. and are made from zinc-plated steel. Our version is a toggle latch and strike plate set. **DFL-A800**

Cleco Wedge-Lock Pliers

Our Cleco pliers offer a straight-forward approach for fastening Cleco/ Wedgelock temporary fasteners. A specially designed "body seat" holds the fasteners body still while the plunger is being depressed. Easy-grip handles ensure minimal installation time with fewer mistakes.

WED-200.....Cleco/Wedgelock pliers
WED-1800P .....1/8"- diameter temporary fastener, 1/4" maximum grip. Package of 10.
WED-3160P.....3/16"-diameter temporary fastener, 1/4" maximum grip. Package of 10.

Buy 5 packs and save 10%! Buy 10 packs and save 20%!

Spherical Bearings

Part #		Dimensions in inches									
		B + .0015 - .0005	D + .0000 - .0007	H ± .005	W ± .005	O Flat dia. ref.	M Cham. ref.	Ball ria. ref.	a° Total misalign.	Ult. radial static load cap. (lbs.)	Approx. brg. wt. (lbs.)
COM-3	**COM-3T**	.1900	.5625	.218	.281	.293	.015	.406	11	3,250	.014
COM-4	**COM-4T**	.2500	.6562	.250	.343	.364	.022	.500	13.5	4,950	.022
COM-5	**COM-5T**	.3125	.7500	.281	.375	.419	.032	.562	12	6,475	.030
COM-6	**COM-6T**	.3750	.8125	.312	.406	.516	.032	.656	10	8,400	.038
COM-8	**COM-8T**	.5000	1.0000	.390	.500	.640	.032	.813	9.5	13,257	.065
COM-9	**COM-9T**	.5625	1.0937	.437	.562	.710	.032	.906	9.5	16,630	.086
COM-10	**COM-10T**	.6250	1.1875	.500	.625	.780	.032	1.000	8.5	21,280	.110
COM-12	**COM-12T**	.7500	1.4375	.593	.750	.920	.044	1.187	9	31,920	.204

High-Strength-Alloy Rod Ends — Male

The high-strength series features a heat-treated chrome moly body, a 52100-bearing-steel ball and a Teflon/Kevlar® self-lubricating and self-sealing race.

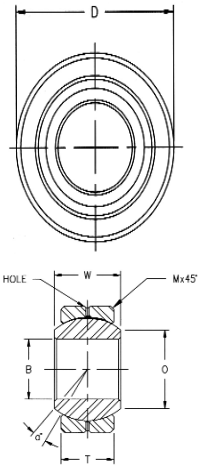

Part #		Dimensions in inches											
Right hand	Left hand	B + .0015 - .0005	W + .000 - .005	T Ref.	A ± .015	D ± .010	Ball dia. ref.	C + .062 - .031	Thread UNF-2B	a° misalign. angle	Ult. radial static load cap. (lbs.)	Approx. brg. wt. (lbs.)
XMR-3	XML-3	.1900	.312	.250	1.250	.625	.437	.750	10-32	13	2,851	.028
XMR-4	XML-4	.2500	.375	.281	1.562	.750	.500	1.000	1/4-28	16	5,260	.043
XMR-5	XML-5	.3125	.437	.344	1.875	.875	.625	1.250	5/16-24	14	7,125	.072
XMR-6	XML-6	.3750	.500	.406	1.938	1.000	.719	1.250	3/8-24	12	8,939	.112
XMR-7	XML-7	.4375	.562	.437	2.125	1.125	.812	1.375	7/16-20	14	9,653	.160
XMR-8	XML-8	.5000	.625	.500	2.438	1.312	.937	1.500	1/2-20	13	15,500	.249
XMR-10	XML-10	.6250	.750	.562	2.625	1.500	1.125	1.625	5/8-18	16	17,148	.382
XMR-12	XML-12	.7500	.875	.687	2.875	1.750	1.312	1.750	3/4-16	14	27,021	.602

High-Strength-Alloy Rod Ends — Female

The high-strength series features a heat-treated chrome moly body, a 52100-bearing-steel ball and a Teflon/Kevlar® self-lubricating and self-sealing race.

Part #		Dimensions in inches												
Right hand	Left hand	B + .0015 - .0005	W + .000 - .005	T Ref.	A ± .015	D ± .010	E ± .010	F ± .010	Ball dia. ref.	C + .062 - .031	Thread UNF-2B	a° misalign. angle	Ult. radial static load cap. (Lbs.)	Approx. brg. wt. (lbs.)
XFR-3	XFL-3	.1900	.312	.250	1.062	.625	.406	.312	.437	.750	10-32	13	2,851	.028
XFR-4	XFL-4	.2500	.375	.281	1.312	.750	.469	.375	.500	1.000	1/4-28	16	5,260	.043
XFR-5	XFL-5	.3125	.437	.344	1.375	.875	.500	.437	.625	1.250	5/16-24	14	7,125	.072
XFR-6	XFL-6	.3750	.500	.406	1.625	1.000	.687	.562	.719	1.250	3/8-24	12	8,939	.112
XFR-7	XFL-7	.4375	.562	.437	1.812	1.125	.750	.625	.812	1.375	7/16-20	14	9,653	.160
XFR-8	XFL-8	.5000	.625	.500	2.125	1.312	.875	.750	.937	1.500	1/2-20	13	15,500	.249
XFR-10	XFL-10	.6250	.750	.562	2.500	1.500	1.000	.875	1.125	1.625	5/8-18	16	17,148	.382
XFR-12	XFL-12	.7500	.875	.687	2.875	1.750	1.125	1.000	1.312	1.750	3/4-16	14	27,021	.602

High-Strength Jam Nuts

Part #	Nut size	Orientation
RPW-1400L	1/4"	Left
RPW-1400R	1/4"	Right
RPW-5160L	5/16"	Left
RPW-5160R	5/16"	Right
RPW-3800L	3/8"	Left
RPW-3800R	3/8"	Right
RPW-7160L	7/16"	Left
RPW-7160R	7/16"	Right
RPW-1200L	1/2"	Left
RPW-1200R	1/2"	Right
RPW-5800L	5/8"	Left
RPW-5800R	5/8"	Right
RPW-3400L	3/4"	Left
RPW-3400R	3/4"	Right

Economy-Plus Series

Male

Part #		Dimensions in inches										
Right hand	Left hand	B + .0015 - .0005	W ± .005	T ref.	A ± .015	D ± .010	Ball dia. ref.	C + .062 - .031	Thread UNF-3A	a° misalign. angle	Ult. radial static load cap. (lbs.)	Approx. brg. wt. (lbs.)
CMR-3	CML-3	.1900	.312	.234	1.250	.625	.437	.750	10-32	20	2,074	.03
CMR-4	CML-4	.2500	.375	.250	1.562	.750	.500	1.000	1/4-28	27	3,820	.04
CMR-5	CML-5	.3125	.437	.312	1.875	.875	.625	1.250	5/16-24	22	5,110	.07
CMR-5-6	CML-5-6	.3125	.437	.312	1.938	1.000	.719	1.250	3/8-24	22	7,605	.10
CMR-6	CML-6	.3750	.500	.359	1.938	1.000	.719	1.250	3/8-24	22	7,605	.11
CMR-7	CML-7	.4375	.562	.406	2.125	1.125	.812	1.375	7/16-20	21	9.122	.15
CMR-8	CML-8	.5000	.625	.453	2.438	1.312	.937	1.500	1/2-20	20	12,224	.24
CMR-10	CML-10	.6250	.750	.484	2.625	1.500	1.125	1.625	5/8-18	26	13,540	.36
CMR-12	CML-12	.7500	.875	.593	2.875	1.750	1.312	1.750	3/4-16	24	18,810	.57

Female

Part #/price		Dimensions in inches												
Right hand	Left hand	B + .0015 - .0005	W ± .005	T ref.	A ± .015	D ± .010	E ± .010	F ± .010	Ball dia. ref.	C + .062 - .031	Thread UNF-3A	a° misalign. angle	Ult. radial static load cap. (lbs.)	Approx. brg. wt. (lbs.)
CFR-3	CFL-3	.1900	.312	.234	1.062	.625	.406	.312	.437	.500	10-32	20	2,702	.04
CFR-4	CFL-4	.2500	.375	.250	1.312	.750	.469	.375	.500	.687	1/4-28	27	4,397	.05
CFR-5	CFL-5	.3125	.437	.312	1.375	.875	.500	.437	.625	.687	5/16-24	22	5,110	.08
CFR-6	CFL-6	.3750	.500	.359	1.625	1.000	.687	.562	.719	.812	3/8-24	22	7,605	.13
CFR-7	CFL-7	.4375	.562	.406	1.812	1.125	.750	.625	.812	.937	7/16-20	21	9,122	.18
CFR-8	CFL-8	.5000	.625	.453	2.125	1.312	.875	.750	.937	1.062	1/2-20	20	12,224	.29
CFR-10	CFL-10	.6250	.750	.484	2.500	1.500	1.000	.875	1.125	1.375	5/8-18	26	13,540	.43
CFR-12	CFL-12	.7500	.875	.593	2.875	1.750	1.125	1.000	1.312	1.562	3/4-16	24	18,810	.65

Specs: Economy-Plus Series

Ball	Body
• 52100 bearing steel; • heat treated; • hard chrome-plated; and • precision ground on all surfaces.	• alloy steel; and • protective-coated for corrosion resistance.

Tire Treatments & Cleaners

Tire Power Tire Softener

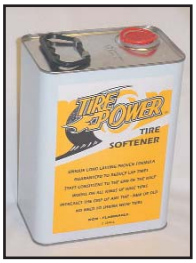

This unique long lasting proven formula is guaranteed to reduce lap times. It stays consistent to the end of the race. It works on all kinds of race tires, even rain tires, and extends the life of the tires. There is no need to shrink wrap the tires. It is non-flammable.
TIREPOWER .....**1 gallon**
TIREPOWER-QT .....**1 quart**

Formula V Traction Treatment

Formula V will make those old or new tires as sticky as they were when they came out of the mold at the factory. Heat cycles and aging causes a tire to lose its original handling and traction. Formula V restores the tire to its new condition. We couldn't believe it either...but it really works! 1- gallon bottle. **FOR-V101**

Hot Lap II Tire Treatment, Asphalt/Dirt

A premium product on a budget price. Designed for kart racers. Reduces lap times two- to five-tenths. It is undetectable and increases tire life up to 50 percent.
PRO-6000

Hot Lap Victory Lane Tire Treatment, Asphalt/Dirt



Super-quick! Works on asphalt or dirt. Dramatically improves qualifying. Excellent on short tracks. Detectable.
PRO-5000

Track Claw Tire Strengthener

Track Claw Tire Strengthener is a revolutionary breakthrough in the tire-treatment technology. It actually gives better handling and control. It's totally undetectable and will never go away during the race. In testing, tires ran cooler, lap times were drastically reduced and tire wear decreased up to 50 percent. For drag racing, it will drastically reduce 60-ft. times off the line.
T10-00 .....1 gallon
T29-70 .....32-oz. kart formula

Track Claw All-Purpose Cleaner and Degreaser

Quick and easy to use, Track Claw All-Purpose Cleaner and Degreaser is chemically designed to remove tar, oil, grease, dirt, rubber and fingerprints from all washable surfaces. It can be used to clean the race car and transporter, inside and out. You'll also find it perfect for cleaning engine parts, sinks, stainless steel, carpet, chrome, shop floors and tile, vinyl and velour upholstry, maintenance equipment and much more! 19-oz. spray can. **T29-50**

Track Claw Racing Polish

Track Claw Racing Polish is the most revolutionary breakthrough in polish technology. It reduces dirt pickup and lowers coefficient of drag. Its unique Fluoropolymer chemistry sets it apart from anything you have ever used, and it's safe on all finishes. It leaves the surface so ultra-slick that it reduces wind drag. 16-oz. bottle.
T-2930

Race Glaze Polish and Sealant

Race Glaze Polish and Sealant is three products in one bottle! The cleaner removes tars and stains, the micro fine leveling agent levels and removes fine scratches and blemishes on clear coats and the durable, yet breathable, clear poly acrylic protective coating protects against fading, acid rain and harsh airborne pollutants. Fast, easy to use and safe for hand or machine buffing.
RGP-15165

Race Glaze Gloss Highlighter

Race Glaze Gloss Highlighter is formulated to enhance gloss and protection between Race Glaze polishings. It can be used on paint, vinyl trim, plastic, glass or chrome surfaces. Use it regularly to "quick-dust" and give your vehicle a "just-polished" feel and look. No harsh airborne pollutants. Fast, easy to use and safe for hand or machine.
RGP-15200

Two-Part Seat Foam

Make custom-fit seat inserts cheaper than the price of a new seat! This two-part kit is easy to use; just follow the directions!
RPW-FOAM

Novus Cleaner & Polish

The #1 cleaner removes dirt and leaves a glaze that cuts static and repels dust. The #2 polish removes fine scratches and haze. Finally, the #3 scratch remover is for deeper scratches. Follow up with the #1 cleaner for the perfect final touch! Now available in 2 oz. or 8 oz. sizes

NOV-7020 .....#1 Polish, 8 oz.
NOV-7026 .....#1 Polish, 2 oz.
NOV-7030 .....#2 Polish, 8 oz.
NOV-7033 .....#2 Polish, 2 oz.
NOV-7080 .....#3 Polish, 8 oz.
NOV-7081 .....#3 Polish, 2 oz.
NOV-7081 .....2 oz. Polish Kit

Aluminum Brightener

This foam cleaner brightens wheels, racing engines, engine blocks, fuel tanks, fishing boats and more. Its thick foaming action leaves a radiant surface with every use, and no residue is left behind. 1 liter. **VAL-71664**

Hylomar Cleaning Fluid and Gasket Remover

This is the ideal low toxicity product to use prior to the application of any sealant. Gasket remover is used to remove cured Hylomar Universal Blue and also cured Hylomar Anaerobic sealants. Both products are 250ml, with brush top.
HYL-HCF001 .....cleaning fluid
HYL-HGR001 .....gasket remover

Lucas Slick Mist

Lucas Slick Mist is a true paint gloss intensifier that is great for motorcycles, cars, boats and more! It can be used on wet or dry surfaces and can even be used as a quick detail spray. It is safe on glass and lexan. This product is Lucas Oil's #1 seller!
LUC-10160 .....**24 oz Bottle**
LUC-10483 .....**8 oz Bottle**

Brake Clean

Tired of wimpy, useless brake cleaners? K&W Professional-Strength Brake Cleaner is the fastest-drying, best-cleaning brake cleaner on the market. Degrease and remove brake fluid, oil, grease and other contaminants. It leaves no residue. **CRC-9810**

HYLOMAR UNIVERSAL BLUE is a polyester urethane based sealant that is non-setting and non-hardening even at high temperatures. The compound is resistant to all industrial fuels, oils, water, water/glycol and methanol mixtures. Hylomar Universal Blue is effective for the sealing of metal to metal and plastic to plastic surfaces. It is used by Formula One and NASCAR race teams. The temperature range is -60°F to 480°F.

HYL-HUBRA1.....6 oz aerosol
HYL-HUBR2 .....75ml tube

GEL LUBE sprays on thin and penetrates, but almost instantly turns into a gel that stays put. Works as an assembly lube, but has thousands of other uses.
VAL-71756

THREADLOCKERS are anaerobic compounds that lock and seal nuts, bolts, bearings, etc.
VAL-71620.....Med., 10 ml.
VAL-71621.....Med., 50 ml.
VAL-71622.....High, 10 ml.
VAL-71623.....High, 50 ml.

Valco has simplified its automotive silicone product line to one premium-grade silicone that does it all. Every color of **ALL-IN-ONE SILICONE** is low-volatile, oxygen-sensor safe and withstands high temperatures.
VAL-71195 .....Aluminum
VAL-71105 .....Clear
VAL-71135 .....Black

RPW Super Absorbent Drying Cloth

Super absorbent all-purpose towel. It washes, dries and polishes any surface. Use for any type of liquid pick-up. Won't scratch any surface. Doesn't drip- doesn't make a mess. Ideal to have in your garage or car. 9-3/4" x 13-1/2" **RPW-DC**

Protect and lubricate new and rebuilt engines with Torco **MPZ ASSEMBLY LUBE AND CAM LUBE**. It has a "stay-put" action and a natural attraction to metal.

VAL-71753 .....12-oz. bottle
VAL-71752 .....4-oz. bottle

HV-350™ is an adhesive and sealant for high-vibration applications. HV-350 is flexible, abrasion resistant, sandable, and paintable. Bonds to glass, wood, plastic, fiberglass, metal, concrete, leather and more.
VAL-71155
VAL-71156 (with tube grip)

K & N Air Filter Oil

K & N Air Filter Oil has been specially formulated to work in combination with the cotton fabric in K & N air filter elements, providing a superior air-filtration system. When used as directed, it quickly penetrates the filter pleats, where it remains suspended in the cotton fabric. Saturation is maintained until the element is eventually cleaned with K & N's Air Filter Cleaner and Degreaser.
KNN-99-0504 ....6-oz. aerosol can- red
KNN-99-0516 ....12-oz. aerosol can- red
KNN-99-0704 ....Sealing grease

K & N Air Filter Cleaner & Degreaser

K & N Air Filter Cleaner and Degreaser is formulated to clean K & N (cotton and foam-fabric type) air cleaners and air filter elements. K & N Cleaner and Degreaser works to dissolve oily dirt build up and can be washed away with water.
KNN-99-0621 ..32-fluid oz. (squirt bottle)
KNN-99-0635 ..1-gallon bottle

Filter Care Service Kits

Includes a 6-oz. bottle of filter cleaner and a 6-oz. aerosol can of filter oil. **KNN-99-5000**
Includes a 12-oz. bottle of filter cleaner and an 8-oz. squeeze bottle of filter oil. **KNN-99-5050**

See the Chemicals and Cleaners category online for additional products.

Castrol SRF Brake Fluid

Castrol SRF is a DOT 4 brake fluid suitable for all disc and drum brake systems except those prescribed for mineral oil. Castrol SRF is a high-performance product. It has a typical wet boiling point of 270°C (518°F). 1 liter.
SRF

Brake Fluid

AP Racing brake fluids have been developed specifically for motorsports. They are compatible with all conventional hydraulic brake systems designed to conform to SAE J1703 requirements.

AP 600 has been developed for racing applications where higher-than-normal temperatures are being experienced, such as when using carbon discs.
500 ml (16.9 fl oz.) **AP6-00**
551 fluid is suitable for all forms of motorsports and conforms to DOT 3 specifications, but it has a much higher boiling point than normal braking fluids intended for road use.
AP5-51

AP Racing PRF Brake Fluid

This fluid has been developed for use in extreme high temperature racing conditions and has a dry boiling point in excess of 320°C (608°F). Conforms to and exceeds DOT 4 and SAE J1703 and SAE J1704.
APP-RF ..500 ml bottle

Motul Brake Fluid

Motul 600 works! Its minimum dry boiling point is 585°F, which makes it perfect for extremely high temperature applications. The half-liter bottle is so inexpensive, you'd better order two!!
MOT-600

Ferodo Formula Racing Brake Fluid

Ferodo Formula Racing Brake Fluid was developed for use in the extreme temperature conditions of competition racing. It is not recommended for normal road use. It has a dry boiling point higher than 572°F (300°C) 500ml bottle. **FRD-FRF**

Stainless Steel Brake Co. Brake Fluid

Stainless Steel Brake Co.'s brake fluid sets a new "state-of-the-art" standard in glycol-type fluids. With a dry boiling point of 570°F (299°C), this fluid was specifically designed to meet the extreme conditions found in professional competition. 12-oz (0.354-liter) bottles. DOT 3
SSB-1012

Red Line Oil

Race Oils

Racing oils provide more wear protection than motor oils for passenger vehicles, however, these products contain fewer detergents and are not suitable for street use

Features:
- Reformulated for improved frictional properties
- Special detergents for improved lubricity and less detonation
- Polyol ester base stocks provide more stability and film strength when exposed to excess fuel dilution
- Each of these products has no less than 2200ppm of zinc and phosphorus for antiwear

0W10, RD1-0104.....Used by many NHRA Pro Stock teams for dyno testing
5W20, RD1-0204.....Consistent wear and operation in drag racing classes like Stock and Super Stock (many switch to 5WT for Class Racing)
10W30, RD1-0304....Popular in NASCAR and Road Racing
15W40, RD1-0404....Versatile product used in stock car racing, road racing, and sprint cars
15W50, RD1-0504....Used in applications with wider bearing clearances
20W60, RD1-0604....Popular in Top Alcohol and Pro Mod classes, AHDRA Nitro bikes, and blown alcohol Tractor Pulling
Break-In Additive, RD8-1403....Provides conventional motor oils with anti-wear additives like zinc and phosphorus (ZDDP) necessary to protect against camshaft and valvetrain damage on break-in

Motor Oils

Produced in only one top-of-the-line grade, these products offer the highest quality available on the market today and in the widest variety of viscosity.

Features:
- Fully-synthetic ester formula for passenger cars, light trucks, performance vehicles and marine applications.
- Excellent wear protection and friction reduction across a wide range of operating conditions.
- High detergency allows extended drain intervals and provides increased cleanliness
- Improved fuel economy and ring seal for more power

0W20, RD1-1804.....Recommended for small cars and hybrids, and some trucks like Honda Insight and Civic Hybrids, Toyota '08 Solara, Camry, Solara, Rav4, and Tundra 5.7L, Venza
5W20, RD1-5204.....Recommended for OEM 5W20 applications like Chrysler, Ford, Acura/Honda, and Mazda
0W30, RD1-1114.....Better flow at extremely cold temperatures compared to 5W30 and 10W30
5W30, RD1-5304.....Most popular oil for modern road cars and light trucks, as specified for most late-model BMW, General Motors, and Nissan vehicles
10W30, RD1-1304.....All-weather viscosity grade for passenger cars and light trucks
0W40, RD1-1104.....Recommended for many Audi, water-cooled Porsche, and Mercedes-Benz applications
5W40, RD1-5404.....As specified for Audi, BMW, Mercedes Benz, Porsche and VW applications
10W40, RD1-1404.....Popular for medium and heavy-duty gasoline engines in light trucks
5W50, RD1-1604.....Popular in for performance engines in high-temperature climates
15W50, RD1-1504.....Popular in turbocharged applications
20W50, RD1-2504.....Popular in turbocharged applications
15W40 Diesel, RD2-1404 ....Recommended for API CJ-4/CI-4 Plus/CI-4/CF/CH-4/CF-4

Power Steering Fluid

Features:
- Improved wear protection, resists thermal breakdown, evaporation and foaming
- Provides continued high pump output, suitable for most power steering units
- Lightweight fluid avoids power losses
- Greater heat resistance helps to prevent boil-over
- Helps to prevent high-temp steering fade and difficult effort steering at low temps
- Compatible with petroleums and synthetics
- Helps prevent leakage and squealing

RD3-0404, 1 Quart

Assembly Lube

Features:
- Prepares potential wear surface and prevents metal contact before adequate lubrication can be supplied
- Unlike other assembly lubes, Red Line's will not plug filters after initial engine start-up
- Provides 3x greater film strength than conventional black Molybdenum Disulfide greases
- Excellent rust and corrosion inhibitor, allows for long-term storage
- For use on camshafts, lifters, pushrods, piston skirts, main and rod bearings, and bolt threads

RD8-0312, 4 oz.

CV-2 Grease

Features:
- Outperforms the best conventional or synthetic greases and lubes
- Withstands extreme temperature and pressure in wheel bearings, U-joints, and high-angle CV Joints
- Used in a variety of applications with operating temps from -100°F to 500°F
- Strong resistance to oxidation and corrosion, low evaporation and oil separation with a minimum effect on rubber seals
- Synthetic fluidity allows increases in bearing life up to 200%

RD8-0402, 14 oz.

Two Stroke Racing Oil

Features:
- Ultimate in two-cycle performance, extreme cleanliness
- Popular in racing and daily applications like motorcycles, marine, snowmobile racing, etc.
- Dyno proven for gains of 3-5% and more power over longer runs
- For use where NMMA TC-W3 lubricants are recommended
- High-temp stability prevents deposits on combustion chambers, exhaust ports, upper ring, and piston crown
- Suggested use at 50:1, but useful up to 100:1 depending on operating conditions

RD4-0603, 16 oz. bottle

Visit our Red Line Oil Category Online for:
- **Additional Red Line Oil Products, including Motorcycle Oils**
- **Technical information**
- **New Products**
- **Current Pricing, including case quantity (12 bottles) discounts!**

Gear Oil For Manual Transmissions

Since most GL-5 gear oils for differentials are too slippery for manual transmissions, Red Line offers these products that ensure proper shifting while providing ultimate wear protection.

Features:
- Appropriate coefficient of friction for most manual transmission synchronizers (other's synthetic gear oils are often too slippery for proper synchro engagement)
- Red Line offers lubricants to pinpoint nearly every transmission application
- MTL & MT-90 are not for use in differentials with hypoid gears
- Excellent gear and synchro protection, balanced slipperiness for easier shifting in cold climates

MT-90, RD5-0304 .....Popular in Nissan, Mazda, Mitsubishi, VW/Audi, Lotus Elise/Exige, Toyota
MTL, RD5-0204 .....Popular for BMW (before 1993), Honda and Acura, Ford Focus, late-model Mini Cooper, Dodge & Jeep NV 1500, 3500, & 5600
75W90NS, RD5-8304 ....Designed for transmissions and transaxles - helps to slow synchros for easier shifting across a broad temperature range

Gear Oil for Differentials

These products contain the extreme pressure additives necessary for ultimate protection road cars and racing vehicles, as well as friction modifiers for proper limited-slip operation.

Features:
- Fully-synthetic formulas created from polyol ester base stocks, offer excellent lubrication under extreme conditions
- High viscosity-index (VI) to provide relatively constant viscosity and film thickness with varying temperature change
- Ester base stocks and friction modifiers provide additional slipperiness to lower operating temperatures by reducing the sliding friction in hypoid gears
- Superior shear stability and reduced oxidation compared to other synthetics and conventional gear oils

75W90 GL-5, RD5-7904 .....Most popular Red Line gear oil, with thousands of applications for passenger cars, light trucks, and racing vehicles
75W140 GL-5, RD5-7914 .....Popular for cars and light trucks like Ford Mustang, Ford F-150, Dodge Ram, Toyota Tundra and Sequoia, and Jeep Cherokee
80W140 GL-5, RD5-8104 .....Recommended for API GL-5, GL-6, MT-1, MIL-L-2105E, and SAE J2360

Water Wetter

Features:
- Unique agent for cooling systems that doubles the wetting ability of water
- Rust and corrosion protection allows for use of straight water in racing or reduced antifreeze levels in warm climates
- Improves heat transfer and reduces cylinder head temperature
- Use one bottle for most passenger cars and light trucks, treats 3 to 5 gallons or 13.2 to 15.9 liters. Vehicles with larger cooling systems should use two bottles. Small cooling systems should use 1oz (3 to 4 capfuls) per quart

RD8-0204, 12 oz. bottle

SI-1 Complete Fuel System Cleaner

Features:
- Cleans injectors, carburetors, valve and combustion chamber deposits with a concentrated blend of the most powerful high-temp and low-temp detergents available
- Cleans to nearly 100% efficiency in one treatment
- Reduces need for octane by up to two points
- Contains synthetic upper cylinder lubricant
- Use one bottle per tank for most effective treatment of neglected vehicle

RD6-0103, 15 oz. bottle

As one of the largest Red Line Oil Distributors, we have the product in-stock for same-day shipping! Plus, we offer case-quantity discounts and have the Guaranteed Lowest Prices! Visit us online for more information and additional products.

Automatic Transmission Fluids

With different combinations of viscosity, slipperiness, and OE-recommended additives packages, Red Line offers the widest selection of ATF available.

Features:
- Each offer improved thermal stability, maintain viscosity levels, and feature lower volatility while providing the required frictional characteristics of each fluid's OEM-style replacement
- Reduced oxidation and lower volatility at high temperature
- Allows high-temp operation without varnishing valves and clutches

D4 ATF, RD3-0504.....Our most versatile ATF, use where Dexron III®, Dexron II®, Mercon® and Mercon V® fluids are recommended, provides a GL-4 level of gear protection
D6 ATF, RD3-0704.....Our lowest viscosity, most shear-stable ATF for consistent operation
Racing ATF, RD3-0304 .....Similar to a Type F fluid, featuring even higher viscosity and no friction modifiers
High-Temp ATF, RD3-0204.....For heavily-loaded vehicles, allowing operation at up to 70°F higher while maintaining thicker viscosity than traditional ATFs
C+ ATF, RD3-0604.....Satisfies Chrysler ATF+, +2, +3 (Type 7176) and ATF+4 (Type 9602) requirements
Synthetic ATF, RD3-0104 .....Typically used where GM Dexron II®, Dexron IID®, Dexron IIE®, Ford Mercon®, and Mercedes Benz ATF

Shockproof Gear Oils

Acting like a liquid grease, these unique lubricants contain a suspension of solid microscopic particles as an extreme pressure agent, offering a "best of both worlds" balance of low drag and superior protection for gear teeth.

Features:
- Relatively low viscosity, yet cushions gear teeth under extreme pressure
- Helps to prevent tooth breakage, resists throw-off
- Avoid use with pumps, coolers, and filters as unique medium and affinity for metal can cause clogging

Heavy Shockproof, RD5-8204 .....Film thickness greater than an SAE 75W250, yet low fluid friction like 75W90
Lightweight Shockproof, RD5-8404....Film thickness greater than an SAE 75W140, yet low fluid friction like 80W gear oil or 30W motor oil
Superlight Shockproof, RD5-8504 .....Film thickness greater than an SAE 75W90, yet low fluid friction like ATF

Limited Slip Friction Modifier

Features:
- Compatible with both petroleum and synthetic gear oils
- Reduces break-in temps as much as 50°F
- Add 1oz at a time to clutch-type limited slip or posi-traction units to eliminate chatter

RD6-0203, 4 oz. bottle

Lucas Oil Products

Heavy Duty Oil Stabilizer

Lucas Heavy Duty Oil Stabilizer is the #1 heavy duty and high performance oil supplement in the U.S. It eliminates dry starts and resists thermal breakdown for total protection in new engines. It stops smoking, knocking, and oil consumption in worn engines. It raises oil pressure, adds lubricity, lowers oil temperatures and stops leaks. It also extends oil life by at least 50%. Use it in any manual transmission or differential to stop wear, leaks, heat, noise and hard shifting. It safely blends with all petroleum products, even synthetics. Lucas Heavy Duty Oil Stabilizer will not void new car warranties. **1 Quart, LUC-10001**

Pure Synthetic Oil Stabilizer

Lucas Pure Synthetic Oil Stabilizer is perfect for use in new equipment that requires synthetic oils or any equipment that needs enhanced performance. It's the perfect addition to race-cars, new cars and four-cylinder cars. Controls heat and wear in motorcycles, air-cooled engines and all drivetrain components. This product greatly reduces friction, improving vehicle performance and fuel economy.
1 Quart, LUC-10130

Lucas High Performance Pure Synthetic Motor Oil

Lucas High Performance Pure Synthetic motor oils are formulated to provide maximum protection against heat and engine wear while minimizing drag to optimize fuel economy. Lucas High Performance motor oil is blended to meet or exceed both European and American manufacturers' specifications and has been field tested to over 12,000 miles in normal off-track use. These one of a kind formulas are the perfect on-track/off-track motor oils. 1 Quart bottles.

LUC-10082 .....**Syn SAE 5W-20**
LUC-10179 .....**Syn SAE 0W-30**
LUC-10049 .....**Syn SAE 5W-30**
LUC-10050 .....**Syn SAE 10W-30 (pictured)**
LUC-10054 .....**Syn SAE 20W-50**

"Plus" Petroleum Racing Oils

Lucas "Plus" Petroleum Oil has long been a preferred motor oil in the racing industry. The "Plus" is for the extra additives that are above and beyond those found in ordinary oils. This line of premium oil was developed to meet the extreme demands of all racing applications. It can withstand the extreme temperatures and fuel contamination of high performance vehicles. Lucas "Plus" Petroleum Oil can be used in everyday passenger cars and trucks, especially with older engines where oil consumption is a problem.

LUC-20500 .....**SAE 20W-50 (pictured)**
LUC-10044 .....**SAE 50 Plus**
LUC-20700 .....**SAE 70 Plus**

Semi-Synthetic 2-Cycle Oil

This clean burning formulation is what the world has needed for years. It's smokeless because the "would-be" emissions are burned, thereby increasing performance and fuel economy. No more filter clogging, and longer engine life. **1 Quart, LUC-10110**

Visit the Lucas Oil category online for other products, including cleaners and motorcycle oils. Technical product information is also available online.

Heavy Duty Gear Oils

Lucas Gear Oils are blended with an extra additive package, over and above the normal gear oil additives. With these products, you can expect longer oil life, lower oil temperatures, longer component life, fewer seal leaks and less noise. This is what gear oil was meant to be. 1 Quart

LUC-10043 .....**SAE 80W-90**
LUC-10042 .....**SAE 85W-140 (pictured)**

Pure Synthetic Gear Oils

Lucas Pure Synthetic Gear Oils are super-slick, long lasting lubricants designed especially for heavy duty or high performance applications where regular gear lubricants just aren't good enough. They contain a special additive package that increases lubricity and insures less gear noise and longer bearing life. Excellent for use in limited slip differentials. Designed to stand up to high temperatures without losing its lubricity.

LUC-10047.....**Syn SAE 75W-90 (pictured)**
LUC-10121.....**Syn SAE 75W-140**

Upper Cylinder Lubricant (Fuel Treatment)

Lucas Upper Cylinder Lubricant & injector Cleaner is formulated for gasoline, diesel and LPG engines. It contains no harmful solvents or alcohol. It is a blend of heat resistant, super slick oils and additives that cleans and lubricates the fuel system. It also causes the fuel to burn more efficiently for greater fuel economy and fewer emissions. Use in diesel engines to neutralize the harmful effects of ultra low sulfur diesel fuel. **5.25 oz, LUC-10020**

Heavy Duty Grease

Lucas X-TRA Heavy Duty Grease is the end result of years of research and a brand new technology. This is the only grease we've found that completely recovers after being extremely overheated.

It's virtually wash-out proof and lasts up to four times longer than conventional lithium grease. Fortified with an extreme pressure additive package, it exceeds OEM "Lube For Life" specifications.

LUC-10330 .....**16 oz. tub (pictured)**
LUC-10301 .....**14-1/2 oz. cartridge**

Octane Booster

Lucas Octane Booster is a GENUINE Performance Enhancer! Tested and proven to deliver three times more Boost than most other brands. It's safe for turbos, oxygen sensors and catalytic converters. Stops knocks and raises MPG in high compression engines. Safe for any gasoline engine.

LUC-10026.....**15 oz.**
LUC-10725.....**2 oz.**

Jiffy-tite's revolutionary quick-connect fluid fittings provide unsurpassed performance under extreme racing conditions. Made of lightweight, high quality aircraft aluminum, brass valves and stainless steel ball bearings, they are corrosion resistant for extra long life. The fittings will work with any style hose except Teflon.

2000 Series Valved Connections

(Flow volume rate at 20 psi = 3.16 GPM)

Part #	Description	Size
JIF-21303	Socket, AN female	-3
JIF-22303	Plug, AN female	-3
JIF-21304	Socket, AN female	-4
JIF-22304	Plug, AN female	-4
JIF-21306	Socket, AN female	-6
JIF-22306	Plug, AN female	-6
JIF-21403	Socket, AN male	-3
JIF-22403	Plug, AN male	-3
JIF-21404	Socket, AN male	-4
JIF-22404	Plug, AN male	-4
JIF-21406	Socket, AN male	-6
JIF-22406	Plug, AN male	-6
JIF-21503	Socket, barbed end	3/16”
JIF-22503	Plug, barbed end	3/16”
JIF-21504	Socket, barbed end	1/4”
JIF-22504	Plug, barbed end	1/4”
JIF-21505	Socket, barbed end	5/16”
JIF-22505	Plug, barbed end	5/16”
JIF-21506	Socket, barbed end	3/8”
JIF-22506	Plug, barbed end	3/8”
JIF-21604	Socket, hose end	-4
JIF-22604	Plug, hose end	-4
JIF-21606	Socket, hose end	-6
JIF-22606	Plug, hose end	-6
JIF-21702	Socket, NPT female	1/8” NPT
JIF-22702	Plug, NPT female	1/8” NPT
JIF-21704	Socket, NPT female	1/4” NPT
JIF-22704	Plug, NPT female	1/4” NPT
JIF-21802	Socket, NPT male	1/8” NPT
JIF-22802	Plug, NPT male	1/8” NPT
JIF-21804	Socket, NPT male	1/4” NPT
JIF-22804	Plug, NPT male	1/4” NPT

3000 Series Valved Connectors

(Flow volume rate at 20 psi = 6.83 GPM)

Part #	Description	Size
JIF-31306	Socket, AN female	-6
JIF-32306	Plug, AN female	-6
JIF-31308	Socket, AN female	-8
JIF-32308	Plug, AN female	-8
JIF-31406	Socket, AN male	-6
JIF-32406	Plug, AN male	-6
JIF-31408	Socket, AN male	-8
JIF-32408	Plug, AN male	-8
JIF-31506	Socket, barbed end	-6
JIF-32506	Plug, barbed end	-6
JIF-31508	Socket, barbed end	-8
JIF-32508	Plug, barbed end	-8
JIF-31606	Socket, hose end	-6
JIF-32606	Plug, hose end	-6
JIF-31608	Socket, hose end	-8
JIF-32608	Plug, hose end	-8
JIF-31704	Socket, NPT female	1/4” NPT
JIF-32704	Plug, NPT female	1/4” NPT
JIF-31706	Socket, NPT female	3/8” NPT
JIF-32706	Plug, NPT female	3/8” NPT
JIF-31804	Socket, NPT male	1/4” NPT
JIF-32804	Plug, NPT male	1/4” NPT
JIF-31806	Socket, NPT male	3/8” NPT
JIF-32806	Plug, NPT male	3/8” NPT

For Elbows:

45 Degree Elbow- add “D” to the end of the part number

90 Degree Elbow- add “E” to the end of the part number

5000 Series Valved Connectors

(Flow volume rate at 20 psi = 14.60 GPM)

Part #	Description	Size
JIF-51308	Socket, AN female	-8
JIF-52308	Plug, AN female	-8
JIF-51310	Socket, AN female	-10
JIF-52310	Plug, AN female	-10
JIF-51312	Socket, AN female	-12
JIF-52312	Plug, AN female	-12
JIF-51408	Socket, AN male	-8
JIF-52408	Plug, AN male	-8
JIF-51410	Socket, AN male	-10
JIF-52410	Plug, AN male	-10
JIF-51412	Socket, AN male	-12
JIF-52412	Plug, AN male	-12
JIF-51510	Socket, barbed end	-10
JIF-52510	Plug, barbed end	-10
JIF-51610	Socket, hose end	-10
JIF-52610	Plug, hose end	-10
JIF-51612	Socket, hose end	-12
JIF-52612	Plug, hose end	-12
JIF-51706	Socket, NPT female	3/8“ NPT
JIF-52706	Plug, NPT female	3/8“ NPT
JIF-51708	Socket, NPT female	1/2“ NPT
JIF-52708	Plug, NPT female	1/2“ NPT
JIF-51712	Socket, NPT female	3/4“ NPT
JIF-52712	Plug, NPT female	3/4“ NPT
JIF-51806	Socket, NPT male	3/8“ NPT
JIF-52806	Plug, NPT male	3/8“ NPT
JIF-51808	Socket, NPT male	1/2“ NPT
JIF-52808	Plug, NPT male	1/2“ NPT
JIF-51812	Socket, NPT male	3/4“ NPT
JIF-52812	Plug, NPT male	3/4“ NPT

MOCAL oil control systems

Reusable and Socketless Push Lock Hose Ends

Available in Distinctive Titanium and Black Anodized Finish (pictured) or traditional Red and Blue Finish.

Straight

Titanium/Black Part #	Red/Blue Part #	Hose and fitting dash size
MOC-TS-6	MOC-FS-6	-06
MOC-TS-8	MOC-FS-8	-08
MOC-TS-10	MOC-FS-10	-10
MOC-TS-12	MOC-FS-12	-12

45° elbow

Titanium/Black Part #	Red/Blue Part #	Hose and fitting dash size
MOC-T45-6	MOC-F45-6	-06
MOC-T45-8	MOC-F45-8	-08
MOC-T45-10	MOC-F45-10	-10
MOC-T45-12	MOC-F45-12	-12

90° elbow

Titanium/Black Part #	Red/Blue Part #	Hose and fitting dash size
MOC-T90-6	MOC-F90-6	-06
MOC-T90-8	MOC-F90-8	-08
MOC-T90-10	MOC-F90-10	-10
MOC-T90-12	MOC-F90-12	-12

Straight Socketless

Titanium/Black Part #	Red/Blue Part #	Hose and fitting dash size
MOC-PS-6	MOC-RS-6	-06
MOC-PS-8	MOC-RS-8	-08
MOC-PS-10	MOC-RS-10	-10
MOC-PS-12	MOC-RS-12	-12

45° elbow Socketless

Titanium/Black Part #	Red/Blue Part #	Hose and fitting dash size
MOC-P45-6	N/A	-06
MOC-P45-8	N/A	-08
MOC-P45-10	N/A	-10
MOC-P45-12	N/A	-12

90° elbow Socketless

Titanium/Black Part #	Red/Blue Part #	Hose and fitting dash size
MOC-P90-6	MOC-R90-6	-06
MOC-P90-8	MOC-R90-8	-08
MOC-P90-10	MOC-R90-10	-10
MOC-P90-12	MOC-R90-12	-12

Visit our Plumbing section online at www.racerpartswholesale.com for additional fittings, adapters and hose.

Aeroquip Hose & Fittings

AQP® Racing Hose

AQP racing hose is compatible with petroleum and synthetic lubricants, hydrocarbon fuels and liquid engine coolants. It operates at higher temperatures for longer periods. Light and flexible, it is easy to work with and its stainless steel cover will ensure durability. Its stainless steel cover resists corrosion and abrasion. This hose is made of AQP elastomer tubing with a partial stainless steel wire inner braid and a full stainless steel outer braid reinforcement. It can withstand continuous operating temperatures from -55°F to +300°F and and a maximum operating pressure of 1,000 psi.

Part #	Hose size	ID	OD
FBA-0400	-4	.22	.44
FBA-0600	-6	.34	.55
FBA-0800	-8	.44	.65
FBA-1000	-10	.56	.80
FBA-1200	-12	.69	.94
FBA-1600	-16	.88	1.15
FBA-2000	-20	1.13	1.41

Teflon® Hose

Maximum operating pressure for this hose is 2,500 psi.

Part #	Hose size	ID	OD
FBC-0300	-3	.13	.25
FBC-0400	-4	.19	.30

Firesleeve

Firesleeve hose flame shield can prevent or delay hose lines from burning. See hose specifications shown below for the correct firesleeve to match each hose size. For other hose styles, select firesleeve with an I.D. slightly larger than the hose O.D.

Part #	ID
FBS-0700	0.44
FBS-0800	0.50
FBS-0900	0.56
FBS-1000	0.62
FBS-1100	0.69
FBS-1200	0.75
FBS-1300	0.81
FBS-1400	0.88
FBS-1600	1.00
FBS-1800	1.12
FBS-2000	1.25
FBS-2200	1.38
FBS-2400	1.50

Socketless Hose

The quick and easy assembly of this socketless hose will save you time. AQP socketless performance hose and fittings are lightweight and extremely easy to work with. Connecting the two is a snap; you don't even need a wrench! You simply slip the hose onto the fittings; it's that simple! Available in Blue or Black.

Blue Part #	Black Part #	Hose size	ID
FBV-0400	FBN-0400	-4	.22
FBV-0600	FBN-0600	-6	.34
FBV-0800	FBN-0800	-8	.44
FBV-1000	FBN-1000	-10	.56
FBV-1200	FBN-1200	-12	.69

Vise-Jaw Inserts

FCM-3661 vise-jaw inserts feature magnetic backs, allowing quick set-ups and easy transfers between vises. **FCM-3661**

***Aeroquip Startlite** racing hose and fittings also available by special order. Call **1-800-397-7815** for more information.*

Reusable Fittings

Straight SAE 37° swivel

Part #	Hose and fitting dash size
FCM-1011	-04
FCM-1012	-06
FCM-1013	-08
FCM-1014	-10
FCM-1015	-12
FCM-1016	-16
FCM-1017	-20

45° elbow SAE 37° swivel

Part #	Hose and fitting dash size
FCM-4022	-06
FCM-4023	-08
FCM-4024	-10
FCM-4025	-12
FCM-4026	-16
FCM-1027	-20

90° elbow SAE 37° swivel

Part #	Hose and fitting dash size
FCM-4032	-06
FCM-4033	-08
FCM-4034	-10
FCM-4035	-12
FCM-4036	-16
FCM-1037	-20

150° elbow SAE 37° swivel

Part #	Hose and fitting dash size
FCM-4052	-06
FCM-4053	-08
FCM-4054	-10
FCM-4055	-12



30° elbow SAE 37° swivel

Part #	Hose and fitting dash size
FCM-4072	-06
FCM-4073	-08
FCM-4074	-10
FCM-4075	-12
FCM-4076	-16
FCM-1147	-20

60° elbow SAE 37° swivel

Part #	Hose and fitting dash size
FCM-4082	-06
FCM-4083	-08
FCM-4084	-10
FCM-4085	-12
FCM-4086	-16
FCM-1148	-20

120° elbow SAE 37° swivel

Part #	Hose and fitting dash size
FCM-4042	-06
FCM-4043	-08
FCM-4044	-10
FCM-4045	-12

180° elbow SAE 37° swivel

Part #	Hose and fitting dash size
FCM-4062	-06
FCM-4063	-08
FCM-4064	-10
FCM-4065	-12

Socketless Fittings

Straight

Part #	Hose and fitting dash size
FCM-1512	-06
FCM-1513	-08
FCM-1514	-10
FCM-1515	-12

90° elbow

Part #	Hose and fitting dash size
FCM-1532	-06
FCM-1533	-08
FCM-1534	-10
FCM-1535	-12

150° elbow

Part #	Hose and fitting dash size
FCM-1552	-06
FCM-1553	-08
FCM-1554	-10
FCM-1555	-12

45° elbow

Part #	Hose and fitting dash size
FCM-1522	-06
FCM-1523	-08
FCM-1524	-10
FCM-1525	-12

120° elbow

Part #	Hose and fitting dash size
FCM-1542	-06
FCM-1543	-08
FCM-1544	-10
FCM-1545	-12

180° elbow

Part #	Hose and fitting dash size
FCM-1562	-06
FCM-1563	-08
FCM-1564	-10
FCM-1565	-12

AEROLUBE

Aerolube socketless hose and fittings are manufactured for a tight tolerance. Always apply a liberal amount of Aerolube on the barbed nipple as well as the inside of the hose. This will allow for a smoother assembly. **FBM-3553**

Straight Male Connector

Aluminum	Steel	"A" dash size	"B" size
FCM-2000	FCM-2511	-03	1/8"
FCM-2001	FCM-2512	-04	1/8"
FCM-2002	FCM-2515	-04	1/4"
---	FCM-2519	-04	3/8"
---	FCM-2524	-04	1/2"
---	FCM-2513	-05	1/8"
---	FCM-2516	-05	1/4"
---	FCM-2520	-05	3/8"
FCM-2003	FCM-2514	-06	1/8"
FCM-2004	FCM-2517	-06	1/4"
FCM-2005	FCM-2521	-06	3/8"
---	FCM-2525	-06	1/2"
---	FCM-2529	-06	3/4"
FCM-2006	FCM-2518	-08	1/4"
FCM-2007	FCM-2522	-08	3/8"
FCM-2008	FCM-2526	-08	1/2
---	FCM-2530	-08	3/4"
FCM-2185	FCM-2523	-10	3/8"
FCM-2009	FCM-2527	-10	1/2"
---	FCM-2531	-10	3/4"
FCM-2010	FCM-2528	-12	1/2"
FCM-2011	FCM-2532	-12	3/4"
---	FCM-2534	-12	1"
---	FCM-2539	-12	1-1/4"
---	FCM-2533	-16	3/4"
FCM-2012	FCM-2535	-16	1"
---	FCM-2540	-16	1-1/4"

AN Flare to Pipe Fittings

45° Male Elbow

Aluminum	Steel	"A" dash size	"B" size
FCM-2020	FCM-2581	-03	1/8"
FCM-2021	FCM-2582	-04	1/8"
---	FCM-2584	-04	1/4"
---	FCM-2588	-04	3/8"
---	FCM-2583	-05	1/8"
---	FCM-2585	-05	1/4"
FCM-2022	FCM-2586	-06	1/4"
---	FCM-2589	-06	3/8"
---	FCM-2592	-06	1/2"
---	FCM-2587	-08	1/4"
FCM-2023	FCM-2590	-08	3/8"
---	FCM-2593	-08	1/2"
---	FCM-2596	-08	3/4"
---	FCM-2591	-10	3/8"
FCM-2024	FCM-2594	-10	1/2"
---	FCM-2597	-10	3/4"
---	FCM-2595	-12	1/2"
FCM-2025	FCM-2598	-12	3/4"
---	FCM-2600	-12	1"
---	FCM-2599	-16	3/4"
FCM-2026	FCM-2601	-16	1"

90° Male Elbow

Aluminum	Steel	"A" dash size	"B" size
FCM-2030	FCM-2610	-03	1/8"
FCM-2031	FCM-2611	-04	1/8"
FCM-2032	FCM-2614	-04	1/4"
---	FCM-2618	-04	3/8"
---	FCM-2624	-04	1/2"
---	FCM-2612	-05	1/8"
---	FCM-2615	-05	1/4"
FCM-2033	FCM-2613	-06	1/8"
FCM-2034	FCM-2616	-06	1/4"
FCM-2035	FCM-2620	-06	3/8"
---	FCM-2625	-06	1/2"
FCM-2036	FCM-2617	-08	1/4"
FCM-2037	FCM-2621	-08	3/8"
FCM-2038	FCM-2626	-08	1/2"
---	FCM-2629	-08	3/4"
FCM-2016	FCM-2622	-10	3/8"
FCM-2039	FCM-2627	-10	1/2"
---	FCM-2630	-10	3/4"
---	FCM-2623	-12	3/8"
FCM-2017	FCM-2628	-12	1/2"
FCM-2040	FCM-2631	-12	3/4"
---	FCM-2633	-12	1"
---	FCM-2632	-16	3/4"
FCM-2041	FCM-2634	-16	1"
---	FCM-2636	-16	1-1/4"

AN Flare Adapters

Flare Union

Aluminum	Steel	"A" dash size	"B" size
FCM-2050	FCM-2750	-03	-03
FCM-2051	FCM-2751	-04	-04
---	FCM-2753	-05	-05
FCM-2052	FCM-2756	-06	-06
FCM-2053	FCM-2759	-08	-08
FCM-2054	FCM-2761	-10	-10
FCM-2055	FCM-2763	-12	-12
FCM-2056	FCM-2765	-16	-16

Female Flare Swivel



Aluminum	"A" dash size	"B" size
FCM-2914	-04	-04
FCM-2915	-06	-06
FCM-2916	-08	-08
FCM-2917	-10	-10

Steel-TFE Hose

45° Tube Elbow

Part #	Hose and fitting dash size
FCM-1110	-03
FCM-1111	-04

AN Flare 'T' Adapters



Union 'T'

Aluminum	"A" size	"B" size	"C" size
FCM-2060	-03	-03	-03
FCM-2061	-04	-04	-04
FCM-2062	-06	-06	-06
FCM-2063	-08	-08	-08
FCM-2064	-10	-10	-10
FCM-2065	-12	-12	-12
FCM-2066	-16	-16	-16

Bulkhead Union

Aluminum	Steel	"A" dash size	"B" size
FCM-2769	FCM-2770	-03	-03
FCM-2071	FCM-2771	-04	-04
---	FCM-2772	-04	-06
---	FCM-2773	-05	-05
FCM-2072	FCM-2774	-06	-06
FCM-2073	FCM-2775	-08	-08
FCM-2074	FCM-2776	-10	-10
FCM-2075	FCM-2777	-12	-12
FCM-2076	FCM-2778	-16	-16

Straight

Part #	Hose and fitting dash size
Price	
FCM-1100	-03
FCM-1101	-04

See Tools Page 17

for complete details on how to save time and fingers from the frayed ends of braided hose!!

AN Flare to Metric Adapters

Aluminum Blue anodized	"A" dash size	"B" size
FCM-2239	-04	10mm x 1.0
FCM-2246	-06	12mm x 1.5
FCM-2240	-06	14mm x 1.5
FCM-2241	-06	16mm x 1.5
FCM-2242	-06	18mm x 1.5
FCM-2243	-0.8	16mm x 1.5
FCM-2244	-0.8	18mm x 1.5
FCM-2245	-10	18mm x 1.5

90° Tube Elbow

Part #	Hose and fitting dash size
FCM-1120	-03
FCM-1121	-04

Accusump & Mocal Sandwich Plates

Accusump Oil Accumulators

An Accusump is an oil reservoir that is connected to the engine's oiling system. It is designed to deliver pressurized oil to an engine before starting to eliminate dry start scuffing (pre-oiling) and to discharge its reservoir of oil during low oil pressure surges to protect against engine damage during demanding racing conditions. It installs simply with only one oil line connecting it. This oil line may be plumbed into the return line of an oil cooler or remote filter using a "T" fitting, into an oil input sandwich adapter, or directly into one of the engine's oil galleys. The Accusump's design includes a piston. On one side of this piston is pressurized air and on the other side of the piston is the reserve of oil. To hold this reserve of oil in the Accusump when the engine is not running and there is no pressure to hold it, a valve must be installed on the oil line (see Manual or Electric Valves below). An air-pressure gauge and an air-fill valve come standard, along with complete installation instructions. Units with electric valves include wire, terminals and toggle switch. The electric units provide a more convenient means of operating the Accusump since they can be wired directly into the ignition. All fittings are 1/2" NPT. Mounting clamps are recommended.

CAN-24046.....1-qt. Accusump (12" long, 3-1/4" body)
CAN-24026.....2-qt. heavy-duty Accusump w/out valve (12" long, 4-1/4" body)
CAN-24006.....3-qt. heavy-duty Accusump w/out valve (16" long, 4-1/4" body)

Accusump Mounting Clamps

Mounting Clamps are recommended for all Accusumps. When used on each end of an Accusump they provide the proper support at the end camps to ensure the tube does not become distorted. They are sold as a set of two stainless steel T-clamps.

CAN-24200 .....2 & 3 Quart Accusumps
CAN-24240 .....1 Quart Accusumps

Accusump Electric Valve Kit

Our electric Accusump valve allows a more convenient way of operating an Accusump. It's especially useful when the Accusump feed hose is mounted in a hard-to-access location where a manual valve could not be reached. When wired directly into the ignition switch the Accusump can be operated automatically to provide pre-oiling. The kit comes with an electric valve which has 1/2" NPT female threads, a 1/2" NPT pipe nipple, a toggle switch, a length of wire, terminals and installation instructions. Recommended for use in street and pre-oiling applications only. **CAN-24270**

Accusump Manual Valve and Cable Kit

Accusump cable kit for manual valves makes it easier for a belted-in driver to open and close the Accusump. Ideal for applications where the Accusump cannot be mounted near the driver or in an easy-to-reach location. Kit comes with a 6' heavy-duty cable, mounting bracket and specially-designed valve. **CAN-24506**

Accusump Manual Ball Valve

Manual Accusump Ball Valve with female 1/2" NPT ends. Comes with 1/2" NPT pipe nipple for installation to the Accusump. **CAN-24260**

Accusump Electric Pressure Control (EPC) Valves

EPC Valves for Accusumps have an advantage over all other types of valves. These valves have the convenience of an electric valve for remote mounted units and the rapid refill rate of a manual valve as required for racing. The EPC valving will only allow the Accusump to discharge oil when the engine's oil pressure drops below a predetermined level and only refill when the pressure rises above that level. Comes with the regulator, electric valve, a pipe nipple, a toggle switch, wire, terminals and instructions.

CAN-24271 .....For discharge/refill of 20-25PSI
CAN-24273 .....For discharge/refill of 35-40 PSI
CAN-24275 .....For discharge/refill of 55-60 PSI

Visit our Accusump category at www.racerpartswholesale.com for Accusump installation instructions, FAQs and more.

Accusump Adapter Sandwich Plates



1. Oil input adapter for applications with a 3/4", 16-thread and 2-1/2" O-ring. This adapter has a 1/2" NPT thread oil input port and lowers the filter 1". It fits Fords, Mercurys, Lincolns, Plymouths, Dodges, Chryslers and most imports. It is to be used only with an Accusump; this sandwich plate won't work as a bypass. **CAN-22565**

2. Oil-input sandwich adapter for applications with a 18mm x 1.5 thread and 2-1/2" O-ring. This adapter has a 1/2 NPT thread oil input port and lowers the filter 1". It fits Buick/GM/Chevy V6s. **CAN-22567**

3. Oil-input sandwich adapter for applications with a 20mm x 1.5 thread and 2-1/2" or 3-1/8" O-ring. This adapter has a 1/2" NPT thread oil-input port and lowers the filter 1". It fits many Hondas. **CAN-22568**

Mocal Sandwich Plate

This compact, lightweight, high-flow sandwich plate incorporates a 180° oil thermostat to regulate oil flow to the cooler until the engine is properly warmed up. The sandwich plate is 1-5/16" thick with 1/2" Parallel ports.

MOC-SP1T.....**3/4"- 16 thread**
MOC-SP1CT.....**13/16"- 16 thread**
MOC-SP1DT.....**18mm thread**
MOC-SP1FT.....**20mm thread**
MOC-SP1GT .....**22mm thread**

Mocal Fittings for Sandwich Plates

These AN Male to BSP Male Unions come by the pair and include the 1/2" Dowty Seal. This is the proper fitting to use with any Mocal Sandwich Plate. Use of a NPT fitting is not recommended, as damage to the plate or leaks may occur.

MOC-2BM808A .....**1/2" BSP x -8**
MOC-2BM810A .....**1/2" BSP x -10**
MOC-2BM812A .....**1/2" BSP x -12**

Mocal Differential Cooler Pump

This 12v fluid circulation pump is suitable for various applications- transmission/differential cooling, turbo oiling, water intercoolers, cool suits etc. The motor is equipped with ball bearing drive and integral cooling fan for long life. The pump is self priming, meaning it can be mounted above the liquid level, and is capable of handling fluid temps up to 300 degrees F. Nylon pump head/housing with viton diaphram/seals. Pump head can be indexed 90 degrees for convenient fluid connections.

- flow rate 1.0- 2.0 GPM and up to 54 PSI
- weight: 3.5 lbs
- 3/8" NPT fittings
- 8-amp current draw

MOC-17522HT

Mocal Heavy Duty Oil Scavenge/Circulation Pump

When high temperature and continuous duty are required, this pump delivers! Designed from the ground up to handle the toughest automotive racing applications for transmission/differential fluid cooling (circulation) and turbocharger oil drain (scavenge) applications. Specifically designed with emphasis on turbo charger scavenge applications. Visit online for additional features and specifications. **MOC-17530SL**

Mocal Remote Oil Thermostat

Designed to prevent flow of engine oil through the cooler until a desired temperature is reached. Prolonged use of an engine in conditions where the oil cannot reach its correct temperature will cause sludge formation and crankcase oil dilution.

MOC-8AN .....-8AN, 180°
MOC-10AN .....-10AN, 180°
MOC-12AN .....-12AN, 180°
High temperature (200 degree) remote oil thermostat.
MOC-10ANHT .....-10AN, High Temp
MOC-12ANHT .....-12AN, High Temp

Perma-Cool Remote Oil Thermostat also available with 1/2" -14 NPT Ports, 190°. **PER-1070**

Remote Oil Filter Mounts

Used in conjunction with spin-on adapters to mount either single or dual filters in a remote location.

A. **PER-1211** .....3/4"-16 thread, 1/2" NPT, ports up (single)
B. **PER-1221** .....3/4"-16 thread, 1/2" NPT, ports right and left (dual)
C. **PER-1791**.....3/4"-16 thread, 1/2" NPT, ports right and left (single)

A.

B.

C.

Spin-On Adapters

Spin-on oil adapters adapt the oil filter to hose fittings for cooler or remote filter. All 1/2" NPT ports; O-ring included.

PER-111.....3/4"-16 thread
PER-112.....18 x 1.5mm thread
PER-114.....13/16"-16 thread
PER-116.....20 x 1.5mm thread
PER-118.....22 x 1.5mm thread

Mocal Thermostat for GM LS Engines

The Mocal Oil Thermostat for GM LS Series V8 engines is the first and only oil take off to incorporate a thermostatic control that automatically regulates oil flow to connected cooling devices and is the answer when installing oil cooling on high performance engines that see street/track use in varying climates and conditions. The Mocal unit bolts in place of factory gauge sender and operates by bypassing oil until minimum temperatures are met before sending full oil flow to the cooler(s). **Specifications**: threaded for M22 x 1.5 female oring boss fluid connections (included), -10AN (-8AN or -12AN available via special order- call for more information); provision for factory M12 x 1.5 sender; includes required hardware and oring/gaskets. **MOC-AOTGM**

90° Billet Remote Oil Filter Adapter

Canton's remote oil filter adapter has a unique design which permits the two 90° 1/2" NPT inlet and outlet ports to be rotated 360 degrees. This simplifies hose and fitting connections for all applications. It's ideal when chassis or steering components prohibit the filter to be in a stock location. Machined from billet aluminum, it comes with all necessary hardware, including O-ring seals.

CAN-22592 .....S.B.C. and B.B.C. (except Mark IV) 13-16- 16 thread, 3-1/4" seal
CAN-22593 .....Chevy LS1 small block 13-16- 16 thread, 2-5/8" seal
CAN-22595 .....Ford, Mopar and applications with 3/4- 16 thread spin-on filters

Sandwich Plates

Use these sandwich plates when you need to retain the original oil filter but want to add an oil cooler. All sandwich plates have 3/8" ports for use with 1/2" hose. 2-1/2" O-rings are included.

PER-181 .....1"-thick sleeve nut with 3/4"-16 M & F threads
PER-182 .....1"-thick sleeve nut with 18 x 1.5mm M & F threads
PER-184 .....1"-thick sleeve nut with 13/16" M & F threads, w/3-1/8" O-ring
PER-185 .....1-7/8"-thick sleeve nut with 13/16" M & F threads- for Chevy V8s w/recessed filter landings
PER-186 .....1"-thick sleeve nut with 20 x 1.5mm M & F threads
PER-188 .....1"-thick sleeve nut with 22 x 1.5mm M & F threads

VW VR6 Oil Take-off Plate w/Themo

VW VR6 engines have a small water/oil heat exchanger, but an additional cooler is required for track, or for high performance use. The Mocal TOP1LPT oil take-off plate is specially designed for the VR6 engine and thermostatic controls (at 180 degrees) oil flow to a remote mounted oil cooler. Supplied with both long and short threaded extensions and can be installed with, or without, the factory water/oil heat exchanger in place. **MOC-TOP1LPT**

Check Valves

Our check valves make sure all the oil being discharged out of an Accusump goes to lubricate the engine bearing and is not fed back toward the pump. Installed in the line of a system where a remote filter or cooler is used, it keeps the oil traveling in only one direction. **CAN-24280**

Catch Can

Are you tired of using an old oil or brake bottle as a catch can? So were we! This 1-quart aluminum catch can features a 1/2 NPT drain hole, a nipple on top for a vent filter and ears for easy mounting. **BRP-568**

Oil System Components

Spin-On Oil Filters

We now offer a CM billet aluminum spin-on filter housing that is machined from 6061-T6 aluminum. These housings are 30 percent lighter than the cast aluminum and they feature a smaller, 3-inch diameter barrel with a screw-in end-cap. Housings have a blue anodized finish. CM spin-on filters use the same high flow and fine filtration element that top racing teams depend on in their CM remote filters. The CM spin-ons give high performance results without the extra lines and fittings required by remote filters. They're ideal for applications where room for a remote is limited or the simplicity of a spin-on is desired. These housings will not burst under pressure surges and they can stand up to the rough service of dirt or off-road racing.

Application: The housings are manufactured in two different sizes. Our CAN-25200 series filter housing is 4-1/4" long, 3-1/2" in diameter and accepts our CM-15 2-5/8" high, 8-micron element, which flows 15 G.P.M. of hot engine oil with no loss of pressure.

CAN-25462- CM spin-on with 3/4"-16 thread and a 2-5/8" diameter O-ring. Fits Ford, Mercury and Lincoln sixes and V8s, Plymouth, Dodge and Chrysler V8s. Long 6-1/4"-45 model.

CAN-25442 CM spin-on with 13/16"-16 thread and a 3-1/4" diameter O-ring. Fits Chevy V-8s (except some 307s), and Chevy in-line sixes. Long 6-1/4"-45 model.

CAN-25262 CM spin-on with 3/4"-16 thread and a 2-5/8" diameter O-ring. Fits most foreign cars. Short 4-1/4"-15 model

CM Spin-On Filter Seal Kit

Seal kit contains one each of the inner and outer block seals (only one required depending on particular filter), one cap seal, one top seal, one anti-drain back base gasket and a full-flow base gasket (to replace the anti-drain back gasket on vertically mounted filters). **CAN-26850**

In-Line Screen Oil Filters

Our in-line screen filters can be used with dry sump, external pump, wet sump or rear-end cooling systems. Canton's screen filters protect your pump's inner workings from metal chips or other damaging debris without restricting the oil flow. We recommend their use on all scavenger (suction) lines. They are designed so that they can easily be disassembled for cleaning and inspection. These units can also eliminate costly pump repairs.

CAN-22650 .....In-line screen oil filter -10 fittings
CAN-22660 .....In-line screen oil filter -12 filttings

Screen Dry-Sump Protector

Our pump protector threads on to a standard -12 male AN fitting and accepts a standard AN female hose end. Because it only extends the oil pan fitting a little over 2 inches, it will fit on most applications. The coarse screen does not restrict oil flow but stops any debris which might cause damage to the workings of a dry sump pump. It's easily removed for inspection. -12 male AN to -12 female hose end. **CAN-22750**

Synthetic Filter Elements

CM replacement filter elements, used in all CM filters, employ an exclusive synthetic medium which has proven itself unsurpassed time and time again. In independent lab tests, the CM filter tested superior to the top-of-the-line high-performance filters in all categories: filtering ability, small-particle-size filtration, low-flow resistance, element resistance to burst/collapse, element longevity and inspectability. Being a depth filter rather than a surface filter, the element can trap contaminating particles without reducing flow. The CM filter material is not affected by moisture and high heat, which destroy the paper elements in conventional filters. The CM filter material is contained in a steel cartridge with both inner and outer cages (except fuel filters, which have outer cage only). The cages support the material and prevent burst/collapse of the element.

8-Micron Replacement Elements

The standard filter elements for all CM spin-on and remote oil filters are rated at 8 microns. They can be identified by the "GOLD" filter cages and ends.

CAN-26000 .....(1) CM -15 8 micron, 2-5/8"-high oil element
CAN-26100 .....(1) CM -45 8 micron, 4-5/8"-high oil element

Fuel Filter Element

The standard CM fuel-filter elements are rated at 1 and 8 microns and tolerates all racing fuels, including alcohol and nitromethane. The element is intended to flow from inside to out only.

CAN-26602 .....(1) CM 2-5/8" tall, 8 micron fuel filter element
CAN-26605 .....(1) CM 4-5/8" tall, 8 micron fuel filter element

Canton Fuel Filters

CM fuel filter elements are made especially to tolerate all types of fuel including gasoline, alcohol, nitro-methane and diesel. These CM-synthetic fiber, depth-filtration elements provide the high flow required to eliminate high speed fuel starvation and the fine filtration needed on the most sensitive fuel systems. Available in one micron and 8 micron ratings with three different housings (4" tall remote, 6" tall remote, and 6" in-line) to meet every application.

4" Remote Fuel Filter

CM remote fuel filters are made from a light-weight, 3-inch-square extrusion and come 4 inches tall with 1-1/16", -12 straight O-ring ports. The housings are red anodized with clear anodized top and bottom caps. A stainless steel T-bolt mounting clamp is included. These filters use the 2-5/8" tall, 8-micron element for extra high flow. **CAN-25912**

CM -45 Series 6" High Remote Oil Filter

Canton's -45 series 6" high remote oil filters can flow 45 GPM of 40 weight at 180 degrees. Like all CM filters, it has no by-pass and come standard with our easily replaceable 4-5/8" high, 8-micron filter element. Stainless steel mounting clamp included. 3-1/4" in diameter and 6" high, comes with -12 O-ring ports. Uses CAN-26100 replacement filter. **CAN-25106**

Visit our Canton Racing Products or Mocal Products categories online for additional products and information.

Mocal Oil Coolers

Cooler construction utilizes a variable number of pressed plates forming oilways. These oilways contain "turbulators" to break down boundary layer effects in the oil flow, allowing for maximum heat dissipation without undue pressure build up. Oilways are interspaced with corrugations providing airways between the plates, and are also louvered to optimize heat transfer. The entire oil cooler is made from aluminum alloy braised into a one-piece unit. Each cooler is then tested by immersion to a pressure of 170 psi. Random coolers are put through even more exhaustive testing to ensure stability under all conditions. 235 Matrix Coolers.
Additional Mocal Oil Cooler Sizes available online.

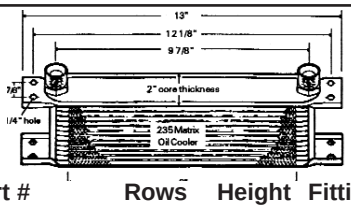

Part #	Rows	Height	Fitting
MOC-13208	13 row	3-7/8"	AN-8
MOC-13210	13 row	3-7/8"	AN-10
MOC-16210	16 row	4-3/4"	AN-10
MOC-19210	19 row	5-3/4"	AN-10
MOC-25210	25 row	7-3/4"	AN-10
MOC-25212	25 row	7-3/4"	AN-12

TRU-Cool® Economy Racing Oil Coolers

Anti-clog design keeps maximum air flow through cooler at all times. Lightweight aluminum alloy is vibration proof. All coolers come with a built-in bracket and a 1/2" NPT fitting.

Part #	Rows	Size
TRU-B7B	12 row	2-3/4" x 11" x 1-1/2"
TRU-L7B	24 row	5-3/4" x 11" x 1-1/2"
TRU-M7B	36 row	8" x 11" x 1-1/2"
TRU-H7B	48 row	11" x 11" x 1-1/2"



Setrab Oil Coolers

Part #	Rows	Height	Fitting
SET-A10F22-8	10	3"	AN-8
SET-A13F22-8	13	4"	AN-8
SET-A16F22-8	16	4-3/4"	AN-8
SET-A16F22-10	16	4-3/4"	AN-10
SET-A19F22-8	19	5-3/4"	AN-8
SET-A19F22-10	19	5-3/4"	AN-10
SET-A25F22-10	25	7-1/2"	AN-10

Setrab, made in Sweden, is the number one supplier of oil coolers and heat exchangers to the professional racing industry and are OEM suppliers to manufacturers such as Rolls Royce and Ferrari. They are simply the best coolers available, very reliable, lightweight, efficient and offer low pressure drop. All models are suitable for engine oil, transmission or differential cooling. Standard design coolers use shallow tubes, internal turbulators and external fins. All coolers are 2" thick, 13" long. Includes two fittings.

Laminar Flow Oil to Water Heat Exchangers

The Laminova heat exchangers consists primarily of two pieces of extruded aluminum profiles, the core and the shell. The inner surface of the core is optimized for efficient water flow rates, low pressure drop and minimum risk of fouling. The outer surface of the core is optimized for maximum liquid (oil) to surface contact, laminar flow, low pressure drop and high heat transfer. The assembly of both sections is sealed with o-rings, ensuring that the unit is resistant to vibration and pressure pulsation.

Heat exchangers are built to order:

- **2 water side connections** (please specify 0.625, 0.75, 1.10, 1.25, 1.50, 1.75 push-on hose or -16, -20, -24 AN thread-on or 3/4 NPT female)
- **2 oil side connections** (please specify -8, -10, -12 or -16 AN thread-on).

MOC-A43-90.....small- 4" x 2" x 2.75"
MOC-A43-180.....medium- 7.5" x 2" x 2.75"
MOC-A43-330.....large- 13" x 2" x 2.75"

Mocal Temperature Indicator Strips

Mocal Self adhesive temperature indicator strips permanently indicate maximum reading within a temperature range. Size 3/4" x 2".
MOC-TS1....**170-260 F Range**
MOC-TS2....**105-160 F Range**
MOC-TS3....**270-360 F Range**



Easy Clean Drysump Oil Tanks

Tanks Feature:

- Lightweight spun aluminum bodies- tig welded construction.
- Tanks can be dismantled in minutes for cleaning.
- Upper and lower sections can be rotated independently (indexed) for ease of plumbing.
- Tanks incorporate a number of oil control features to eliminate surge under all conditions.
- Returned scavenge oil is returned to the side of the tank, spun and run through a system of baffles to promote oil/air separation.
- Two top mount rotating breathers for connection to rocker cover and catch tank.
- Aluminum tank fill cap-seals with o-ring.
- AN/JIC female thread bungs for suction/return fittings.

Tank Dia.	Tank Height	Overall height (w/breathers & cap)	Inlet/ Outlet Bung Size	Oil Capacity* (quarts)	Part #
5"	14"	15.25"	-10AN	3.5	**MOC-F19ES**
6.5"	14"	15.25"	-10AN	6	**MOC-F19E**
8.25"	14"	15.25"	-12AN	8	**MOC-F19EM**
9.5"	16"	17.25"	-12AN	10	**MOC-F19EL**

***Oil capacity is quoted with tanks filled to just below the internal baffle plate. Overall oil system volume will be greater based on oil hose lengths, oil cooler and oil filter sizes.

Fuel Safe Fuel Cells & Accessories

Pro Cell Racing Bladders

The Pro Cell line from Fuel Safe is simply the most durable gasoline bladder available in the industry today. The Pro Cell utilizes a double layer of proprietary fuel resistant coating over a backbone of super tough ballistic fabric. They come complete with steel container, full foam baffling, aircraft nut ring, gasket, pick up assembly and fill plate. They are approved for use in FIA, SCCA, SCORE, NASCAR and many more and are designed for pump gasoline, racing gasoline, AVGAS & gasohol. Not for nitro or alcohol.

Sportsman Racing Bladders

The Sportsman Cell from Fuel Safe provides a high quality product at an affordable price. Sportsman Cells are approved for use by most major race sanctioning bodies. They come complete with steel container, full foam baffling, aircraft nut ring, gasket, pick-up assembly and fill plate. They are designed for pump gasoline, racing gasoline, AVGAS and diesel. Not for nitro or alcohol.

Core Cells

Fuel Safe is proud to offer the least expensive FIA-FT3 certified bladder available for the racer breaking into a series that requires the FIA approval. Every Fuel Safe Core Cell comes with full foam baffling, aircraft style nut ring, gasket, bolts, dual -8 pick-ups, standard style fill plate with billet 2-1/2" threaded cap and -8 rollover vent check valve. The Core Cell comes ready for you to assemble and does not include a container.

Enduro Cell Racing Bladders

The Fuel Safe Enduro Cell combines state of the art technology with specially formulated polymer materials to bring you the fuel cell of choice for racers looking to meet the FIA-FT3 specification at an economy price. Enduro cells come complete with full foam baffling, aircraft style nut ring, gasket, pick-up assembly and rollover check valve. Designed for pump gasoline, gasohol, racing gasoline, AVGAS, diesel, alcohol and nitro (if alcohol or nitro is used, foam baffling must be removed).

Race Safe Cells

The Race Safe fuel cell from Fuel Safe is the absolute best economy cell on the market today. When you do not have a need for a specific sanctioning body certification for your cell, the Race Safe will still get you top-of-the-line safety without a top-of-the-line price.

Visit our Fuel Safe category online at www.racerpartswholesale.com for available sizes, containers (steel and aluminum available on most cells) and pricing. Or give us a call at 1-800-397-7815 for help selecting your next Fuel Safe Racing Cell. Custom Fuel Cells also available- call for more information.

1/2" Check Valve

Our 1/2"-vent check valve for remote fill is designed to be mounted in fill plates. If offers positive shut-off (-8AN fitting).
FSS-ITVV08

Billet Check Valve

In-line check valve with positive shut-off.
FSS-ILVV08 .....1/2"
FSS-ILVV06 .....3/8"

Roll Over Valve

3/8" in-line roll-over vent valve.
FSS-RV38

Electronic Sending Unit

Electronic fuel level sending units are specially designed for fuel cells and bladders. No moving parts make these units very durable. Sending units can be shortened to fit your cell and recalibrated for accuracy. Must specify OHM range (empty to full) when ordering.
FSS-SU012 .....12", can shorten to 6-1/2"
FSS-SU024 .....24", can shorten to 12-1/2"
FSS-GA200 .....Gas gauge

Fuel Pick-up Kit

Kit contains 2 ft. of hose, 1 swivel hose barb, 1 bulkhead fitting and 1 filter.
FSS-FP180 .....3/8" -6 AN
FSS-FP181 .....1/2" -8 AN

Fuel Cell Foam

Universal foam comes in blocks approximately 12" x 12" x 12" (approx. 6.5 gal.)

FSS-FOAM

Replacement Fuel Safe Fuel Cell Foam is also available for each specific cell. Please call us for more information on foam for your fuel cell.

Looking for other Fuel Safe products? Visit our Fuel Safe category online at www.racerpartswholesale.com or call 1-800-397-7815.

Fuel Pumps

Our high-performance electric fuel pumps eliminate vapor lock and flooding with a smooth, constant and dependable supply of fuel- even on the hottest days and in the highest altitudes. We offer the dependibility of Purolator/Facet high-performance electric fuel pumps, for either import or domestic carbureted engines, in two race-proven types:



Solid State

Solid State- proven on thousands of original-equipment applications requiring moderate fuel volume.

Interrupter pumps- built for high-volume fuel requirements.

Interrupter

Both offer superior reliability and low power requirements. Both types of fuel pumps are self-priming and compatible with all fuels including gasoline, diesel, blended alcohol and pure alcohol; there are no rubber diaphragms to swell or deteriorate in harsh conditions. They are quite easy to install, with a two-bolt installation and compact design.

Part #	Type	Maximum Pressure	Average Flow	Fitting
PUR-40104	SS	1.5-4.5	15@1psi	1/8 NPT
PUR-40106	SS	4-6	15@1psi	1/8 NPT
PUR-40108	SS	4-6	15@3psi	AN-6
PUR-480534	Int.	6.5-7.5	35@2psi	1/4 NPT
PUR-476087-E	SS	4-5.5	36 GPH	1/8-27 Internal

Fuel Filter

Recommended by Facet for use on the inlet side of solid-state fuel pumps. One end has 1/8 pipe thread for direct connection to solid-state pumps with 1/8 female NPT ports. The other end has a fitting for 3/8" diameter hose. 74 micron. **Note:** Interrupter pumps have a built-in filter.
PUR-479735

For additional Fuel Filters, please see page 36 or visit www.racerpartswholesale.com

Mr. Gasket Adjustable Fuel Pressure Regulator

- Adjusts from 1 to 6 lbs.
- 1/8" NPT
- Includes fittings, hose and clamps
- Fits 5/6" & 3/8" I.D. fuel line.

RPW-9710

SPA Technique Electric Water Pump

The Davies Craig EWP is designed to replace or supplement the existing belt-driven mechanical water pump of your engine. It has a high flow capacity and has the advantage of running at a speed independent of the engine speed. It can be controlled by the engine temperature or the need for engine cooling, in much the same way as electric cooling fans operate. The EWP can also be set to continue running after engine shutdown to prevent damaging heat rise. When your EWP is used to replace the mechanical pump, you will notice an increase in engine power and torque, especially at high engine speeds. **SPT-EWP8005**

Electric Water Pump, 12v 90 Watt, Technical Specifications:
Operating Voltage: 4V DC to 14.5V DC
Maximum Current: 7.5A
Flowrate: 20 L to 80 L/min, (300 gal. to 1,300 gal./hr..), 13.5V DC
Operating Temperature: -20 C to 130 C (-5 F to 270 F)
Pump Design: Clockwise centrifugal with volute chamber
Motor Life: 2,000 hrs continuous at 80 C (180 F) and 12V DC
Pump Weight: 900 grams (2 lbs)
Maximum pressure: tested to 50 psi
Fits hoses sizes 32 mm to 50 mm (1-1/4" to 2")

Electric Boost Pump

The 12-volt Davies Craig electric booster pump, EBP, with its high flow capacity, specifically designed hermetic seal and robust magnetic drive, makes the EBP ideal for a range of applications.
SPT-EBP9001

Electric Boost Pump Technical Specifications:
Operating Voltage: 9V DC to 15V DC
Maximum Current: 1.3A
Flowrate: 13.3L/min at 10k Pa; 176gal./hr. at 10k Pa
Temperature: -40 C to 135 C (10 F to 275 F)
Pump Design: Clockwise centrifugal pump
Motor Life: 15,000 hrs.
Pump Weight: 260 grams (0.6 lbs)
Drive: Magnetic, no seal
Hose Sizes: 12-20mm (inlet/outlet)

Digital Electronic Controller

This latest generation 'Digital' Controller allows you to electronically set the target temperature and it adjusts the rate of flow, hunting for and then locking onto, the temperature you set. The actual coolant temperature and other operational information is displayed at all times to keep you informed and in control. **SPT-EWP8020**

Need more information? Visit us online anytime at www.racerpartswholesale.com, e-mail us at info@racerpartswholesale.com or call 1-800-397-7815 Monday through Friday, 8 to 5 EST.

Stack Instruments

Stack Clubman Tachometer

- Legendary Stack Stepper-Motor Needle Movement.
- Configurable for all negative earth and magneto ignition systems.
- Unrivaled Digital Quartz accuracy guaranteed for life.
- Peak RPM 'Tell-Tale' memory.
- Exceptional reliability.
- Fully sealed against water and dust.
- Fits standard 80mm cut outs.
- Blue LED maintenance free backlight.
- Supplied with mounting bracket, switch kit and user manual.
- Available in black or white face
- Available RPM Ranges include 0-8000, 0-4-10500, 0-6-15000
- 1 year competition warranty.

STK-ST200

ST200C Classic Tachometers

Same features as the Clubman Tachometer, but with classic styling and no backlighting. 80mm face.
RPM Range includes 0-8000, 0-10000 or 0-12000

STK-ST200C

Stack Professional Stepper Motor Analogue Gauges

These precision auxiliary instruments combine digital microprocessor accuracy with a high-precision stepper motor needle movement, to provide a new level of accuracy and reliability in 52mm gauges. They combine the durability and readability of 270° mechanical gauges with the easy installation and safe operation of conventional electric gauges. The 270° dialface together with the new white LED backlighting and illuminated needle ensure excellent readability day or night. All gauges come complete with wiring harness and associated sensor (except for fuel level gauge).

Visit the Stack Category at www.racerpartswholesale.com for all available Stepper Motor Analogue Gauges.

Stack Electric Gauges

These electric auxiliary instruments feature advanced 90° air-core movements and simple 3-wire installation. Electrical sensors keep hazardous fluids in the engine compartment. White LED backlighting and illuminated needle ensure excellent readability day or night. Supplied complete with wiring harness and associated sensor.

Stack Mechanical Gauges

This range of 52mm diameter gauges have been specifically designed for vehicles with no or low powered electrical systems. Bronze bourdon tube 270° sweep movement. White LED through-the-dial backlighting, White LED illuminated needle

Dash Display Systems for Race and Rally

The ST8100 Dash Display System replaces all dashboard instruments- tachometer, oil pressure gauge, fuel pressure gauge, water temperature gauge, oil temperature gauge and voltmeter- with a single lightweight carbon composite display module.
Standard features include:

- Analogue Tachometer- the preferred choice of most racers.
- Peak Value 'Tell-Tale' Memory
- High accuracy solid-state pressure sensors.
- Super-bright warning lights.
- White LED backlighting.
- Driver selectable LCD display layers show different engine and performance information.
- Configurable speed calibration to suit any vehicle.
- 1-year Competition Warranty.
- Available in a wide choice of RPM ranges.

Model	Speed (ST670)	RPM	Oil Press.	Fuel Press.	Water Temp.	Oil Temp.	Battery	Sequential Shift Light (ST539)	Air Temp.	Boost Press.	Lap time (ST546)	Lap memory (ST8190)	Corner Speed (ST8109)	Predict. lap timer (ST8108)
ST8100	Optional	✔	✔	✔	✔	✔	✔	Optional			Optional			
ST8100M	✔	✔	✔	✔	✔	✔	✔	Optional			✔	✔	✔	✔

ST8916 Multi-Function Dash Display Systems

The ST8916 multi-function display system combines the proven benefits of integrated Stack Display Systems with the latest Stack Multi-Function Technology. An easy-to-read display system with fast, accurate analog dial face and the clear, back-lit LCD display forms the base systems; the hardware capabilities are already built-in awaiting optional PIN code activiation. Optional features include integrated Data Recording, CAN-Interface, GPS-Interface, Telemetry-Interface, Sequential Shift light and Predictive Lap Time.

Features include:

- Multi-function display function activated by PIN number
- Fully configurable LCD
- Fully configurable alarm system
- 14 standard inputs
- Easy configuration via "drag and drop"
- Integrated switches and alarm lights
- Expandable up to 45 inputs
- Complete system "ready out of the box" including wiring harness, lap time receiver, speed sensor, USB interface and DataPro Software.

Clear Display
The Backlit LCD uses the latest Transflective technology for guaranteed visibility in both bright sunlight and complete darkness.

Configurable LCD Display
Choose 2, 4, or 6 parameters per page display.

Configurable Alarm System
Fully configurable alarms alert driver by display messages and/or warning LEDs.

For further details and the complete Stack Product Line, please visit www.racerpartswholesale.com

Ultra Shift Lights

Features:
- stand-alone unit so you can use it with any tach
- microprocessor-driven with no plug-in modules
- peak rpm recall which is adjustable in 10 rpm increments
- built-in tach displays real-time rpms
- wide range of up to 13,000 rpms and 1-6 pulses per revolution.

STW-114906 .....**yellow LED**
STW-114918 .....**red LED**
STW-114919 .....**blue LED**

Stewart Warner Mechanical & Electric Gauges available. Please visit us online or call for information on Stewart Warner's Performance Line, including Oil Temp, Water Temp, Oil Pressure, Fuel Pressure, Boost Pressure Gauges, Tachs and more!

SPA Technique Dual Gauges, 2-1/16-inch, Black Face/Black Bezel

Part No.	Description
SPT-DG200	OP/WT
SPT-DG201	OP/OT
SPT-DG202	FP/WT
SPT-DG203	WT/OT
SPT-DG204	WT/Volts
SPT-DG205	Brake Bias
SPT-DG206	Boost/Temp
SPT-DG207	FP/Volts
SPT-DG208	OP/Volts
SPT-DG209	OT/OT
SPT-DG210	Temp/Temp
SPT-DG211	Boost/EGT
SPT-DG212	FP/OT
SPT-DG213	Press/Temp
SPT-DG214	Trans/Rear Temp
SPT-DG215	FP/OP
SPT-DG216	Boost/FP
SPT-DG217	Boost/OP
SPT-DG218	Fuel Level/Volts
SPT-DG222	EGT/EGT

All instruments come complete with comprehensive manual, sensors and wiring harness and are ready for immediate installation. Select red or green backlight color.

Need assistance choosing your next gauge? Visit www.racerpartswholesale.com for complete information on all our gauge lines. Or contact us at 1-800-397-7815 or info@racerpartswholesale.com.

Auto Meter

Auto Meter Gauges

A race-proven design, Auto Meter's Sport-Comp II instruments are easy to read by day and are exceptionally crisp and clear by night with brilliant white illumination against a black background. Full Sweep and Short Sweep Electric Gauges and Full Sweep Mechanical Gauges available. Available gauges include Oil, Fuel and Boost Pressure, Transmission, Water and Oil Temp, Voltmeter and Fuel Level.

Boost/Vacuum Mechanical Gauge, AUT-3603

Oil Pressure Mechanical Gauge, AUT-3621

Water Temp Electrical Gauge, AUT-3655

Visit our Auto Meter Category online at www.racerpartswholesale.com for complete details on Auto Meter's Sport-Comp II gauge line.

Looking for a different Auto Meter Product? Give us a call at 1-800-397-7815 or e-mail us at info@racerpartswholesale.com for information on the complete Autometer line.

AccuTech Digital Memory Tach

- State-of-the-art electronics give you accuracy to within 10 RPM
- Ultra light weight- only about 1.5 ozs
- 3.5" wide x 1-7/16" Tall x 11/16" Thick
- Fast response, easy recall
- High RPM warning light

LAR-44391.....**0- 10,000 RPM**
LAR-44402.....**0- 19,000 RPM**

For more AccuTech Gauges, visit us online.

Hawk Brake Pads

HAWK PERFORMANCE

BRAKE PAD TECHNOLOGY OF CHAMPIONS™

Hawk Brake Pads for Racing & High Performance Street

Hawk Performance has dominated Motorsports braking for over 20 years, offering highly engineered friction products for nearly every type of racing. The key to Hawk's success has been their passion to develop and supply leading-edge product technologies and maintain their position as the global market leader. Hawk Performance offers over 10 different application-specific compounds designed to meet the needs of today's race teams. Hawk also brings their technology to street car performance in two street compounds.

Street Application Compounds

HP Plus

These pads are ideal for import and domestic streetcars that compete in Autocross, Solo and Track Day competition. They have extremely high friction output and extremely high fade resistance.

HPS

Provides advanced braking characteristics to enhance your driving experience. HPS features increased stopping power, high friction/torque hot or cold, gentle on rotors, extended pad life, low dust and are virtually noise-free.

Visit us online at www.racerpartswholesale.com to download the complete Hawk Catalog, Application Guide or Pad Number Cross Reference. **Or call 1-800-397-7815 or e-mail info@racerpartswholesale.com for help in choosing your next Hawk Brake Pad!**

Race Application Compounds

DTC-70

Extremely high torque with aggressive controllable initial bite. Superior release and torque control characteristics. Brake pads designed for cars with high deceleration rates, with or without down force, on non-ABS-sensitive applications. Optimal Temp: 400-1600°F

DTC-60

High torque with less initial bite than DTC-70. Superior release and torque control characteristics. Brake pads designed for cars with high deceleration rates, with or without down force. Recommended for use with DTC-70 when split friction between front and rear axle is desired on non-ABS-equipped applications. Popular choice for use on lighter weight front axle applications, with or without ABS.
Optimal Temp: 400-1600°F

DTC-30

Brake pads designed to meet the demands of Open Wheel and Dirt Circle Track racing. Uniquely controllable torque with smooth consistent feel and bite. Superior release and torque control characteristics.
Optimal Temp: 100-1200°F

HT-10

Intermediate to high torque with a smooth initial bite. Very consistent pedal feel. Excellent modulation and release characteristics. Optimal Temp: 300-1300°F

Blue 9012

Medium to high torque and temperature compound, with excellent brake modulation. Optimal Temp: 250-1000°F

MT-4

Medium to high torque and temperature compound, with medium to high initial bite. Brake pads designed for Circle Track cars under 2800 lbs, without high deceleration rates. Optimal Temp: 400-1200°F

Black

Medium torque and temperature compound designed to be a good, all-purpose, low-cost racing brake pad. Optimal Temp: 100-900°F

DR-97

Good static coefficient of friction on cast iron rotors. Smooth linear torque. Low pad and rotor wear. Brake pads specifically designed for use in drag racing applications. Optimal Temp: 100-900°F

Brake Bleeders & Brake Components

Motive Products Power Bleeders

The Motive Products Power Bleeder is the number 1 selling DIY pressure brake bleeder. All bleeders come with everything you need to bleed your hydraulic brake or clutch system and Motive Product's full 1 year warranty.

Visit our Motive Products category online for an application guide and additional Motive Power Bleeders.

European Power Bleeder

Works on most European cars, including Alfa Romeo, Audi, BMW, Fiat, Mercedes, Peugeot, Porsche, Renault, SAAB, Volkswagen, Volvo, and all other cars with 45mm threaded hydraulic fluid reservoir caps (Includes adapter 1100). **MOT-0100**

Universal Power Bleeder

Works on most imported and late model American cars, including many GM, FORD, and Chrysler vehicles. Also fits most Honda, Mazda, Mitsubishi, Nissan, Toyota, and Subaru. Fits all other cars with a round hydraulic fluid reservoir smaller than 3.5 inches across. (Includes adapter 1101.) **MOT-0101**

GM Power Bleeder

Features Custom cap to fit most late model GM cars and trucks. Fits Cadillac's, Buick's, Chevrolet's, Oldsmobile's, Pontiac's, Saturn's, also fits 2005+ Ford Mustangs. **MOT-0108**

Black Label European Power Bleeder

Features Custom-machined aluminum cap and deluxe swivel fitting. Comes with an extra length of high grade polyurethane tubing that won't cloud or crack with exposure to brake fluid. Works on most European cars and all other cars with 45mm threaded hydraulic fluid reservoir caps. **MOT-0109**

Power Bleeder Pro

Motive Brake Bleeder Power Bleeder Pro kit comes with adapters to fit virtually any car or truck on the road. (Includes adapters 1100, 1101, and 1105). **MOT-0250**

SpeedBleeders

Bleeding your brake or clutch line has never been easier or simpler!

Revolutionary double patented Speed Bleeder replaces the original bleeder valve in your caliper/ wheel cylinder with a spring loaded one way ball and check valve design. The uniqueness of the stainless steel check ball is that it opens to allow the old fluid and air out, then closes automatically between pumps preventing the old fluid and air from re-entering the line. Once installed, it becomes a permanent part of the brake system. It's a real time saver!

Visit **www.racerpartswholesale.com** for an application guide or call **1-800-397-7815**.

Brake Balance Adjuster

- Ball bearing shaft support- friction free
- Non twisting flex connector line- won't wrap up
- Easy turn knob for quick adjustments at speed

LAR-44101

Billet Brake Balance Adjuster

- Ball bearing mount for easy, no binding adjustments
- Adjust with round knob or with handle (can be removed)
- Detents every 90° make precise adjustments easier
- Braided flex connector won't wrap up

LAR-44102

Proportioning Valves

Stainless Steel Brake Corp. developed a super-compact brake proportioning valve that has a grip knob for fine-tuned adjustments, a 60 percent reduction over the full pressure range and billet aluminum construction with anti-corrosive brass intervals. This competition-proven unit measures only 1-3/4 inches high by 1-1/4-inches wide by 3-1/4" deep, which fits even the tightest cockpits. It comes with 3/16-inch tube adapters. **SSB-1000**

Tilton Master Cylinders

Tilton master cylinders are engineered to provide optimum performance at a surprisingly moderate cost. Many configurations can be assembled with the components that are provided.

- Universal mounting from side or flange.
- Lightweight anodized aluminum cylinders for wear and corrosion resistance.
- Large (10.7-oz.) and small (4-oz.) resevoirs.
- Includes 3/16-inch inverted flare & AN-3 line adapters.
- Replaces master cylinders with 2-1/4", two- bolt mounts (the industry's standard pattern).

Part # for kit	Cylinder bore size
TIL-74-625U	5/8"
TIL-74-700U	7/10"
TIL-74-750U	3/4"
TIL-74-812U	13/16"
TIL-74-875U	7/8"
TIL-74-937U	15/16"
TIL-74-1000U	1"

Additional Tilton Products available at www.racerpartswholesale.com

Genesis Technologies Brake Temp Paint

- 6 Color Temperature Range in One Bottle 0° - 1239°+ F., 0° - 671°+ C.
- Features Metal Cap with Horsehair Brush, Color Code Guide and Instructions on Bottle for Quick Reference
- Packaged 1 fluid oz. per Bottle in a Plastic Carrying Jar. **GB1-000**

Single Brake Fluid Bleed Bottle

- Magnet holds bottle while you bleed your brakes.
- Hoses connect to bleeder valves- bleed one at a time or both at once!
- Cap for hoses prevents leakage during storage.
- Comes with 1/4" bleed wrench.

LAR-45202 .....(1 bottle)

Ducting

NACA Ducts

Our air-intake ducts are precision vacuum-thermo-formed to exacting specifications of race-tested designs to yield the lowest drag and the highest air flow velocity, unlike most other commercially available ducts. These ducts are formed from high-impact 1/8" ABS or Lexan sheets and have extra-wide flanges to accommodate a wide variety of mounting needs. Our ducts have special hose-retention ribs to ensure air hose retention in high-vibration stress areas. Specially designed hose adapter (#SPA-D103) adapts any duct from 3" to 2-1/2" or 2" hose and it just snaps into place. All ducts come in black ABS except for #SPA-D104, which is a clear Lexan NACA duct, and #SPA-D102, which comes in black or clear. 3" openings.

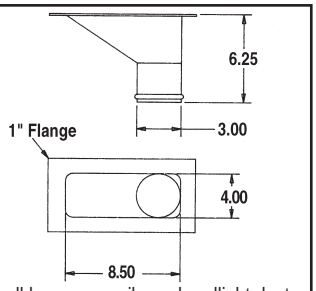

Small bumper, spoiler or headlight duct
SPA-D100

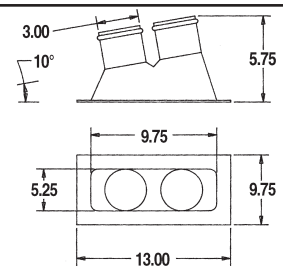

Double bumper, spoiler or headlight duct
SPA-D101

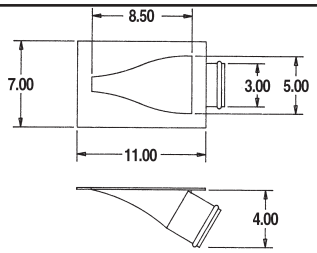

Small NACA duct
SPA-D102 (black)
SPA-D102C (clear)

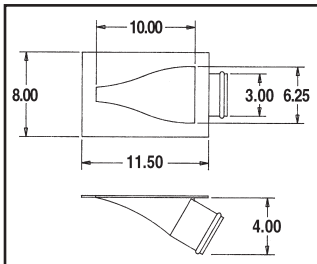

Large clear duct for windows.
SPA-D104

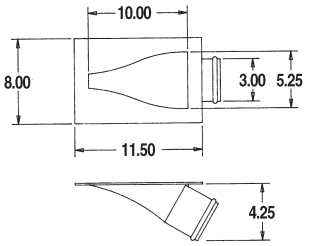

Large NACA duct
SPA-D105

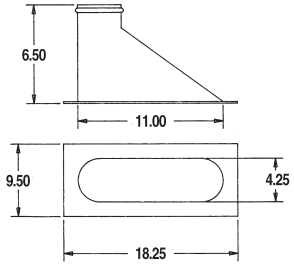

Large Ramair duct for bumper, spoiler, headlight, etc. **SPA-D106**

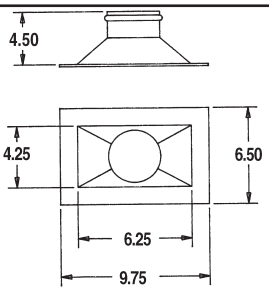

Small air duct for bumper, spoiler or small areas. **SPA-D107**

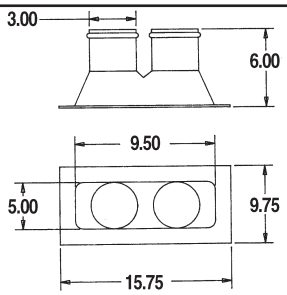

Double bumper, spoiler or headlight duct
SPA-D108

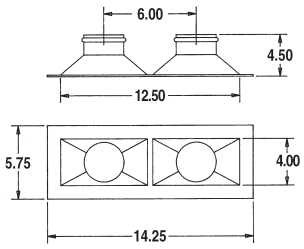

Small double air duct for bumper, spoiler, etc. **SPA-D109**

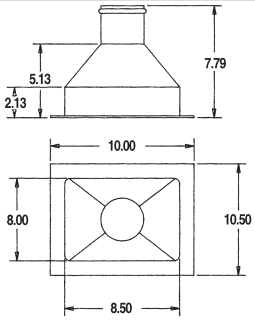

Oil cooler duct–fits our oil cooler part number TRU-M7B. **SPA-D110**

Hose Adapter

Snaps on any of our ducts; reduces hose size to 2.5" or 2"
SPA-D103A .....3" to 2.5"
SPA-D103B .....3" to 2"

Tie Wraps

Great for attaching hoses and ducting! Available in black, white, red, blue, green, yellow and orange. Packages of 100.

RPW-TIE4 .....**4"**
RPW-TIE8 .....**8"**
RPW-TIE11 .....**11"**
RPW-TIE14 .....**14"**

For more Tie Wraps- see page 9 or visit www.racerpartswholesale.com

High-Temp Ducting

350°F Aircraft Neoprene- Designed for moving air from -65°F to 350°F, this Neoprene hose is an extremely lightweight, highly flexible, low-pressure ducting. Constructed with fiberglass cord, bronze-plated steel-spring wire helix and rubber-coated fiberglass fabric to meet your ducting needs. Can be screwed together to form a continuous length. Perfect for air ducts, oils, and transmission coolers and intake ducts.

Neoprene
10' sections

THE-NN100 .....Neoprene 1" ducting
THE-NN125 .....Neoprene 1.25" ducting
THE-NN150 .....Neoprene 1.5" ducting
THE-NN200 .....Neoprene 2" ducting
THE-NN250 .....Neoprene 2.5" ducting
THE-NN300 .....Neoprene 3" ducting
THE-NN350 .....Neoprene 3.5" ducting
THE-NN400 .....Neoprene 4" ducting
THE-NN500 .....Neoprene 5" ducting
THE-NN600 .....Neoprene 6" ducting

600°F Aircraft Silicone- Designed for moving air from 80°F to 600°F, our silicone ducting is lightweight and extremely flexible. It is excellent for close-quarter applications where ducting has to snake around objects. Construction includes fiberglass cord with high-temperature silicone rubber-coated woven fiberglass fabric and bronze-plated steel-spring with wire helix. Can be screwed together to form a continuous length. Good for applications where high temperatures exist such as brake ducting. Available in 11"-sections only.

Silicone
11' sections

THE-SS100 .....Silicone 1" ducting
THE-SS125 .....Silicone 1.25" ducting
THE-SS150 .....Silicone 1.5" ducting
THE-SS200 .....Silicone 2" ducting
THE-SS250 .....Silicone 2.5" ducting
THE-SS300 .....Silicone 3" ducting
THE-SS350 .....Silicone 3.5" ducting
THE-SS400 .....Silicone 4" ducting
THE-SS500 .....Silicone 5" ducting
THE-SS600 .....Silicone 6" ducting

SPAL Electric Fans

Spal® is recognized worldwide as a leader in automotive technologies tailored specifically to meet rigorous performance cooling requirements. The fiber-glass-filled polpropylene construction makes it heat resistant, resulting in fan blades that don't flex under high-temperature conditions. Therefore, the fan will maintain a constant CFM rate. They have a long life expectancy due to their durable and reliable construction. They're available in push and pull varieties.

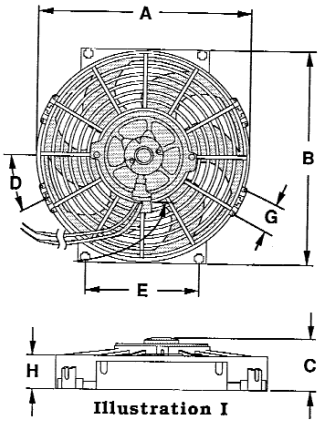

Illustration I

Diameter	A	B	C	D	E	Blades	CFM	Amps	Pull part #	Push part #
5.2" fan	5.58	5.58	3.92	4.32	1.40	Straight	252	2	SPA-03011	SPA-03013
5.6" fan	6.00	6.00	3.92	5.58	1.40	Straight	300	2.5	SPA-00291	
6.5" fan	7.03	7.24	2.05	5.31	1.42	Straight	330	6.3	SPA-00402	SPA-00403
7.5" fan	7.95	8.27	2.05	5.95	1.26	Straight	440	5	SPA-00358	SPA-00393
9" high-perf. fan	9.37	9.72	3.70	5.47	2.13	Straight	740	8	SPA-02061	SPA-02053
10" fan	10.59	11.20	2.05	5.59	1.10	Straight	650	6.4	SPA-00360	SPA-00374
10" high-perf. fan	10.6	11.30	3.70	5.71	2.13	Straight	1070	10	SPA-02057	SPA-02058
11" dual fan	23.46	16.26	4.25	22.28	2.60	Straight	2780	25	SPA-02052	
11" high-perf. fan	11.93	12.36	3.70	6.77	2.24	Straight	1390	12.5	SPA-02054	SPA-02040
11" fan	11.57	12.20	2.48	6.10	1.10	Straight	970	8.3	SPA-01500	SPA-01502
12" high-perf. fan	6.51	13.03	3.70	na	2.24	Straight	1630	14.5	SPA-02038	SPA-02025
13" high-perf. fan	13.62	14.17	3.39	7.09	1.10	Curved	1710	18.5	SPA-02044	SPA-02045
13" fan	13.62	14.17	2.05	7.09	1.10	Straight	920	6.7	SPA-00398	SPA-00399
14" high-perf. fan	14.45	15.04	3.39	7.52	1.10	Straight	1720	18.5	SPA-02041	SPA-02055
14" high-perf. fan	14.45	15.04	3.39	7.52	1.10	Curved	1720	16.3	SPA-02042	SPA-02056
16" fan	15.75	16.30	2.05	8.13	1.10	Straight	1300	7.5	SPA-00400	SPA-00401
16" high-perf. fan	15.75	16.30	3.39	8.13	1.10	Straight	2360	21.6	SPA-02120	SPA-02047
16" fan	15.75	16.30	3.39	8.13	1.10	Curved	2070	17.40	SPA-02049	SPA-02048

Tripac Fans

Tripac provides high-quality, high-performance cooling fans at affordable prices. These fans have curved blades for quiet operation and can be reversed in order to be a pusher- or puller-style fan. See illustration above for sizing.

	A	B	C	D	E	G	H	CFM	Part #
9" fan	9.64	9.57	2.41	22.5	4.97	1.29	1.41	570	TRI-4109B1
10" fan	11.1	10.63	2.62	45	5.15	1.29	1.57	650	TRI-4110B1
11" fan	12.48	11.5	2.48	45	5.87	1.29	1.61	880	TRI-4111B1

Thermostat, Relay & Wiring Harness

- Our relay wiring kits are a must-have when installing an electric fan.
- Designed to safely integrate with OEM wiring.
- Waterproof 40/50 Amp relay.
- Printed wires (for ease of installation).
- 3/8" NPT (National Pipe Thread) stainless steel sensor.
- Optional switched override capability.
- 1/2" NPT adapter included.

SPA-185FH .....185° themostat, relay & wiring harness
SPA-195FH .....195° themostat, relay & wiring harness

Thermostat (stainless steel 3/8" pipe thread)

- 3/8" NPT stainless steel sensor.
- Sensor turns fan off 20 degrees below activation temperature.

SPA-185TS .....185° thermostat
SPA-195TS .....195° thermostat

SPA Technique Silicone Hose

-60° C to + 220° C temperature range. Available in Straight, 45 Degree, 90 Degree or 135 Degree.
Please visit our SPA Technique Category or search for "Silicone Hose" at www.racerpartswholesale.com

Quick-Mount Kit

Our quick mount kit works like cable ties. Mount oil coolers or fans through a radiator or your own pre-drilled holes. It comes with four quick mount straps, pads and locks. **TRI-5005**

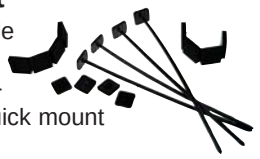

Automatic Programmable Fan Controller

This fully waterproof controller is programmable and will read almost all OEM and aftermarket sensors on the market.

- Programmable to activate at any temp.
- Factory programmed to 160° Low, 200° High (when used with FAN-PWM-TS).
- Variable speed for reduced fan noise.
- Uses OEM or optional SPAL Temp Sensor.
- Waterproof extruded aluminum construction.
- LED indicators for High, Low, and A/C.

SPA-PWM

Temperature Switch for SPA-PWM

- Temperature sender for use with the SPAL SPA-PWM
- 3/8-inch NPT thread.
- Waterproof connector.

SPA-PWMTS

Fan Harness with Relay

- Our relay wiring kits are a must-have when installing an electric fan.
- Designed to safely integrate with OEM wiring.
- Waterproof 40/50 Amp relay.
- Printed wires (for ease of installation).
- Optional switched override capability.

SPA-FRH

Camp & Motorcycle Travel

Cooking Equipment

We have cooking equipment and eating utensils that are perfect for using at the track or on your next camping trip. Our grills make barbecuing easy and fun. And don't forget a package of sporks or a complete meal kit!

Lanterns and Lights

The classic, long-burning candle lantern provides warmth and natural light from a single candle. The MightyLites offers LED light that can be used as a torch or a lantern. Multiple sizes and styles available online. Perfect to keep in the trailer for emergencies or to use while camping.

Catoma Tents

Catoma's patented Speedome integrated frame makes these tents easy to set-up in less than 1 minute! Three models offer multiple layout options. Each tent includes a carrying bag with roll down closure. All have polyurethane waterproofing, bathtub floor and taped seams for added waterproofing. **Images and Videos available online.**

Ultra-Lite Cot

The UltraLite Cot packs down to 16" long by 5" diameter and weighs less than 3 pounds for big-man 325lb weight rating. No end bars -- tall guys sleep great too. Takes 3 minutes to assemble when totally disassembled for the minimum packed size. Quiet sleeping -- no pins, bolts, or rivets to squeek. You sleep floating above rocks, sticks, roots, water and snow. All materials are impervious to saltwater and sunlight. The 3-layer laminated ripstop fabric won't sag or rot. Set the UL Cot across a slope and sleep great on camp sites that would make you slide off a foam pad. 24" wide by 74" long [61cm x188cm]. Includes a ripstop nylon carry bag. Made in the USA! **RPW-ULC**

More products available in our Camp and Travel Category online. Check out additional photos and videos on these products, plus additional products such as dry packing bags, sleeping bags and other new products.

H2W Waterproof Clothes Sacks

The Helen Twowheels (H2W) Bags are rugged, waterproof bags that are great for throwing into the trailer. No need to worry about tossing these bags on the wet grass- the high quality material is laminated on the inside with a layer of polyvinyl and seam-sealed to keep water out. The clothes sack is the perfect bag for people who want convenience with easy access. They have double handles for easy duffle-bag type use.

HTW-410.....**14" x 32"** .....**Extra Large**
HTW-420.....**12" x 26"** .....**Large**
HTW-430.....**10" x 20"** .....**Medium**

Marsee Ballistic Accessories

Made from 1050 denier Ballistics fabric with reflective Marsee logo. Closures on Sunglasses Case and I-Pod Case are zippers. Closures on Cell Phone Case and Wallet are hook and loop. All are lightweight. Black exteriors.

MAR-CELL .....**Cell Phone Case- for flip phones**
MAR-IPOD .....**I-Pod Case- for large I-Pods or I-Phones**
MAR-SUN .....**Sunglasses case**
MAR-WALLET .....**Wallet with silver interior**

Cell Phone Case

Sunglasses Case

Wallet

I-Pod Case

frogg toggs® Outerwear

FroggToggs Rain Suits and Accessories available online.

Available in sizes S-3X, FroggTogg Rain Suits pack into their own small compression sack and are ideal to have in your car or trailer.

Visit us online for Nikwax Waterproofing Cleaners and Chemicals.

NIKWAX EASIER SAFER DRIER

www.racerpartswholesale.com

The Racer Parts Wholesale difference

- **GUARANTEED LOWEST PRICES!**. If you find a lower price on a product that we carry, we'll match it! This offer does not include closeouts, seconds or discontinued items. The item must also be in stock and ready for shipment.
- Most orders are shipped the same-day.
- Extensive information available online.
- Phone and Email handled by knowledgeable, experienced people.

Shipping Policy:

- All Orders will incur a Flat Shipping Charge, which includes Free Insurance. Please call or visit our Shipping Policy section online for current shipping charges.
- Most orders will ship via UPS Ground. Some may ship via USPS, Bax Global or other ground service.
- Valid for 48 contiguous states only.
- Orders shipped outside of the 48 contiguous states will be charged accordingly and will be added at the time of shipment- call if you would like to know the exact charge prior to order completion.
- Some products will have oversize or overweight surcharges per item. Please call or visit our Shipping Policy section online for current surcharges.
- Expedited shipping, including UPS 3-Day Select, UPS 2nd Day Air and UPS Next Day Air, is available and will incur additional charges. Call or see website for for current expedited shipping charges.
- Most orders entered by 2pm EST ship the same day. If your order is time-sensitive or you have any questions about your order, please call 1-800-397-7815.
- **There are no hidden or additional charges!**

Guaranteed Lowest Prices! If you find a lower price on a product that we carry, we'll match it. This offer does not include closeouts, seconds or discontinued items. The item must also be in stock and ready for shipment.

Return Policy:

All returns must be received at RPW within 45 days of the date of purchase and are subject to a 15% restocking fee. Special Orders are not returnable. Please call for a Return Merchandise Authorization Number prior to returning the product.

Hours:

We are available Monday through Friday 8 a.m. to 5 p.m. Eastern Standard Time toll free at 1-800-397-7815. You may also visit us online 24 hours a day at **www.racerpartswholesale.com** or e-mail us at **info@racerpartswholesale.com.** If you are in the Indianapolis area, we welcome customers to visit our warehouse during our regular business hours.

Prices:

Pricing and shipping policy are subject to change without notice. Visit **www.racerpartswholesale.com** or call 1-800-397-7815 for current pricing.

LIMITED WARRANTY

MOTOR RACING AND MOTORCYCLE RIDING ARE EXTREMELY HAZARDOUS. INJURY OR DEATH CAN AND DO OCCUR. THE PRODUCTS WE SELL HAVE NO WARRANTY OR REPRESENTATIONS MADE ABOUT THEIR ABILITY TO PROTECT AGAINST INJURY OR DEATH. THE USER ASSUMES THAT RISK.

We're racers and riders. Sometimes we go too fast. Racer Parts Wholesale and its agents and subcontractors are not responsible or liable for errors or omissions. Prices are subject to change without notice.

RACER PARTS WHOLESALE (referred to as the "warrantor") will repair or replace products proven to have a defect in materials or workmanship with new or refurbished parts free of charge in the United States within 30 days of the original purchase. We do not warranty any electrical components or assemblies. Manufacturer warranties, if any, will apply. Our warranty is extended only to original purchaser. A purchase receipt or other proof of date of original purchase will be required before warranty service is rendered.

The warranty only covers failures due to defects in materials or workmanship which occurred during normal use and does not cover normal maintenance, including but not limited to normal wear and tear of the product incurred during its intended use. It does not cover damage which occurs during shipment or failures which are caused by products not supplied by the warrantor or failures which may result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set up adjustments, modifications or commercial use, or other business or rental use of the product or damage which is attributable to acts of God.

Limits and Exclusions

There are no express warranties except as listed above. THE WARRANTOR SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF WARRANTY. ALL EXPRESS AND IMPLIED WARRANTIES INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO THE APPLICABLE WARRANTY AND SET FORTH ABOVE. Some states do not allow the exclusion of limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions or limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state. If a problem with this product develops during or after warranty, you may contact the warrantor at the following address: 411 Dorman St., Indianapolis, IN 46202-3647, U.S.A. Repair work which does not involve defective materials or workmanship is not covered by this warranty. Costs of such service, including shipping charges, are the responsibility of the purchaser.

Editorial, copyediting and layout by Jack Borsos and Amy Hall, Racer Parts Wholesale. Front cover photography by Joe Jennings.
© 2010, Racer Parts Wholesale®. All rights reserved.

RACER PARTS WHOLESALE
411 Dorman St.,
Indianapolis, IN 46202-3647

PRE-SORTED
STANDARD
U.S. POSTAGE
PAID
RACER PARTS
WHOLESALE

These Product Lines and more can be found inside and online at www.racerpartswholesale.com:

Longacre — Pages 8-19, 23, 41, 43

RED LINE SYNTHETIC OIL — Pages 28-29

Aeroquip PERFORMANCE PRODUCTS — Pages 32-33

FUEL SAFE Racing Cells — Page 38

KOUL tools™ — Page 17

CANTON RACING PRODUCTS — Pages 34-36

ChatterBox!™ — Page 6

HI-PERFORMANCE LUCAS OIL PRODUCTS INC. — Pages 26, 30

Jiffy-tite MOTORSPORTS — Page 33

STACK STACK STACK — Pages 3, 40

ODYSSEY THE EXTREME BATTERY — Page 22

CTEK™ — Page 22

SPAL® — Page 45

auto meter® — Page 41

MOCAL oil control systems — Pages 31, 34, 35, 37

HAWK PERFORMANCE — Page 42

CHASE INTELLIGENT VIDEO CAM — Pages 3, 6

STEWART WARNER PERFORMANCE — Page 41

www.racerpartswholesale.com 1-800-397-7815
info@racerpartswholesale.com 317-639-0722 (fax)